

date 10/02/2013

page 1 of 3

MODEL: GF0778B | **DESCRIPTION:** SPEAKER

FEATURES

- square frame
- S.P. Level (db) 95
- · paper cone




SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
nominal size			77		mm
impedance	at 0.8 kHz, 1 V	6.8	8	9.2	Ω
resonant frequency	at 1 V	200	250	300	Hz
sound pressure level	1 W, 50 cm ave., at 0.5, 0.6, 0.8, 1 kHz	92	95	98	dB
response	10 dB max.	Fo		15,000	Hz
input power			3	5	W
operation	must be normal at program source		3		W
buzz, rattle, etc.	must be normal at sine wave		4.89		Vdc
magnet	size: 45 x 22 x 8 mm				
load test	48 hours of white noise at		3		W
heat test	20 ~ 50% RH for 48 hours	68	70	72	°C
humidity test	90 ~ 95% RH for 48 hours	38	40	42	°C
RoHS	yes				

FREQUENCY RESPONSE CURVE


parameter	conditions/description
potentiometer range	50 dB
rectifier	RMS
lower limit frequency	20 Hz
wr. speed	100 mm/sec
zero level	70 dB

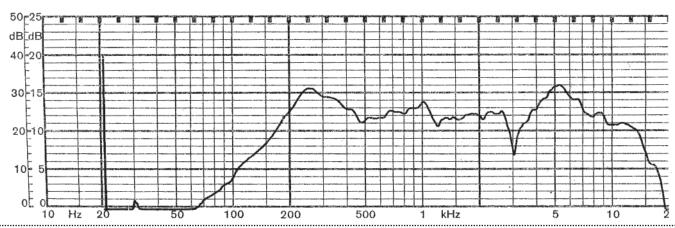



MECHANICAL DRAWING

units: mm

tolerance: ±0.5 mm



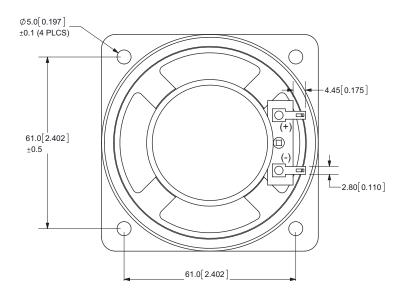



REVISION HISTORY

rev.	description	date	
1.0	initial release	09/18/2006	
1.01	applied new template	02/14/2012	
1.02	updated height, updated solder tabs and mounting holes	10/02/2013	

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 **800.275.4899**

Fax 503.612.2383 **cui**.com techsupport@cui.com

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CUI Inc.: