




FRONT ENTRY

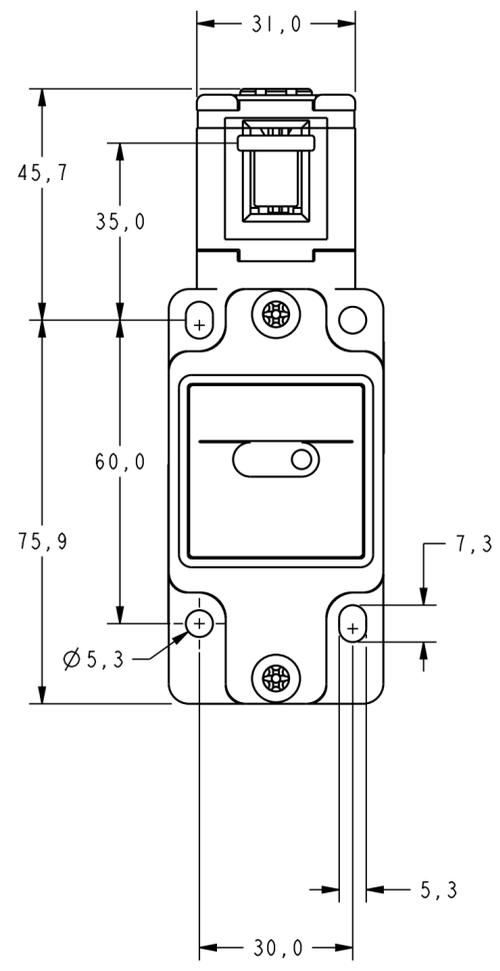


R400,00 MIN DOOR RADIUS

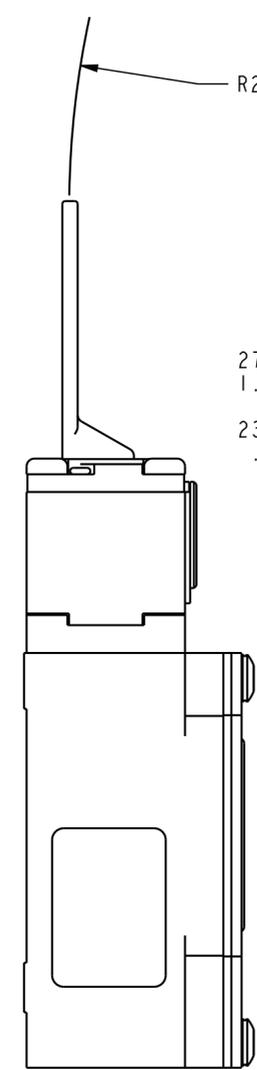

R250,00 MIN DOOR RADIUS

27,45 MIN INSERTION DISTANCE
1.080

23,55 MAX INSERTION DISTANCE
.927

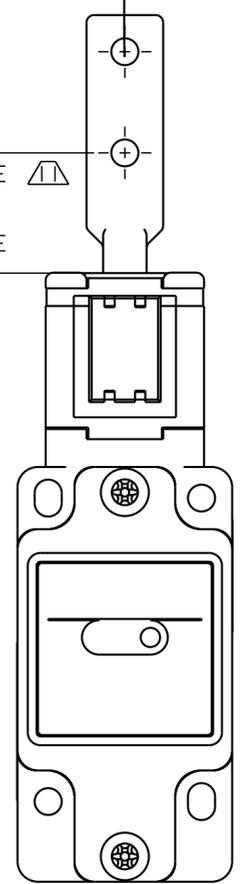

TOP ENTRY

P.T.C./CAD 30
 DRAWN MAM 28 AUG 98 CHECK JAF
 CHECK DVM 21 SEP 06
 CHECK CMH 12 OCT 12
 CHECK CMH 12 OCT 12
 RELEASE NO. PR-23758
 REPLACES
 DRAWING NUMBER
 3233
 ISSUE
 1
 REVISIONS
 L 0083578
 M 0094570
 10 NOV 11
 21 SEP 06
 12 OCT 12
 GK SERIES CHART 3
 PAGE 2 OF 8


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division


SWITCH - LIMIT

CATALOG LISTING
GK SERIES CHART 3


THIRD ANGLE PROJECTION		
SCALE FULL		
DO NOT SCALE PRINT		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±
WEIGHT APPROX .5 KG / 1LB		

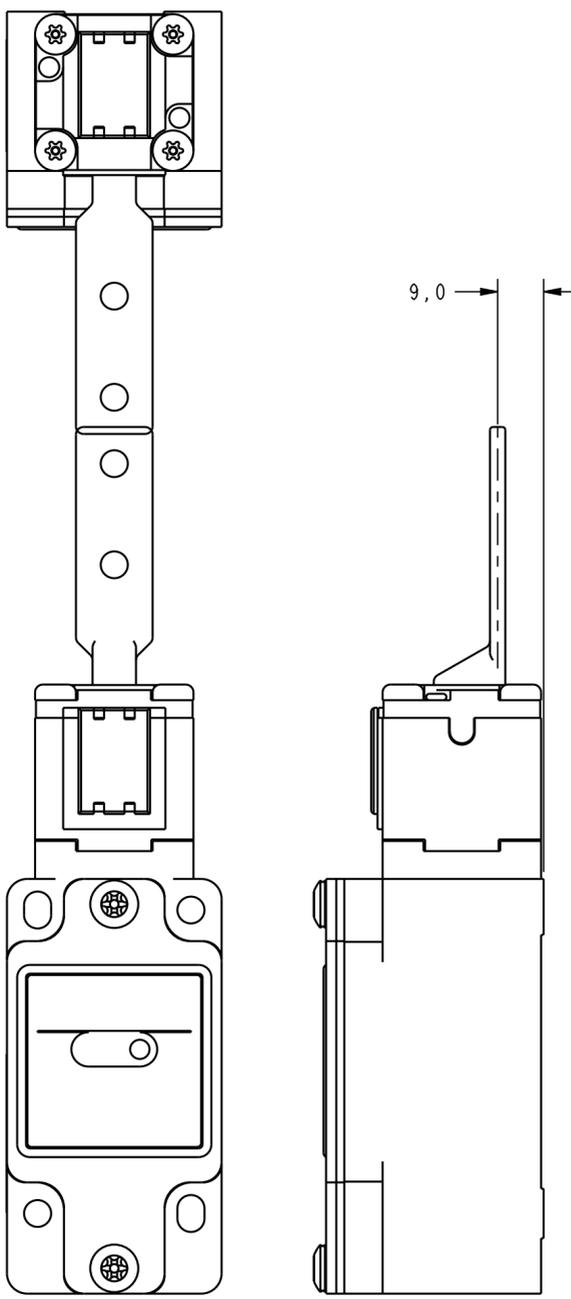


HEAD CODE L

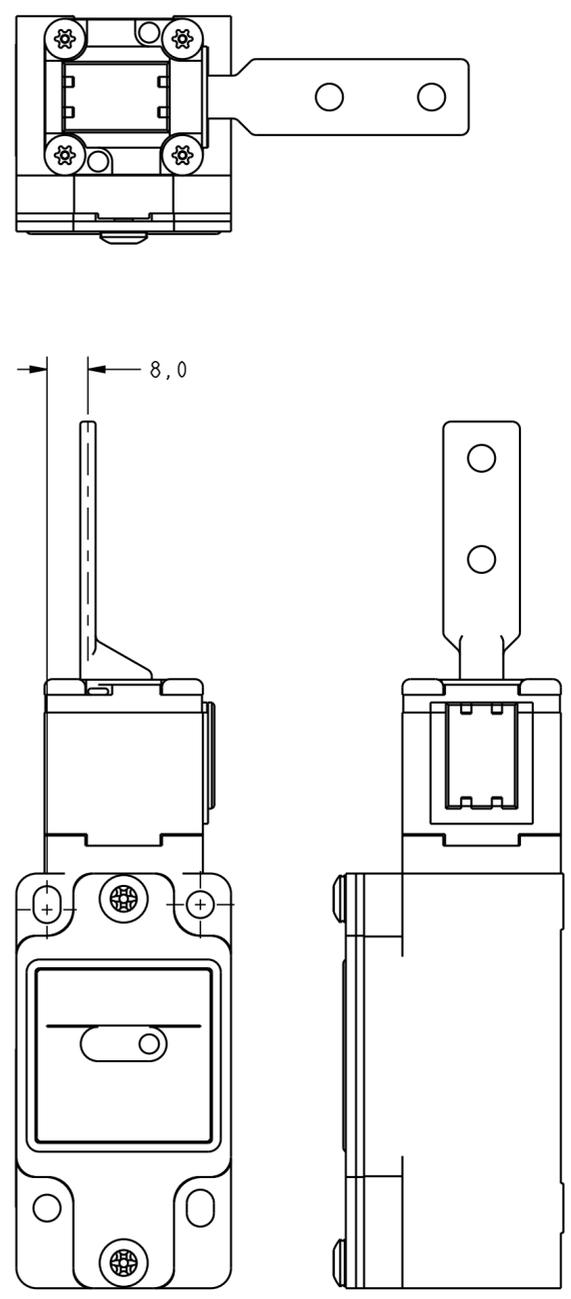

HEAD CODE M

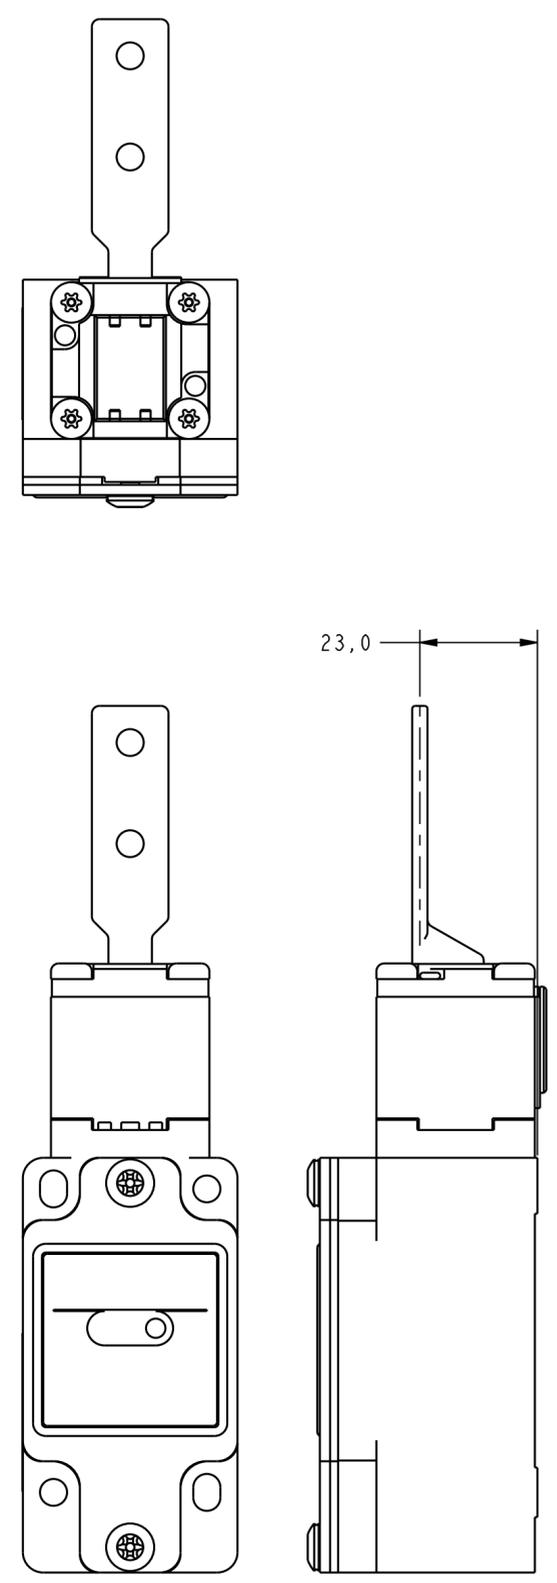

HEAD CODE N

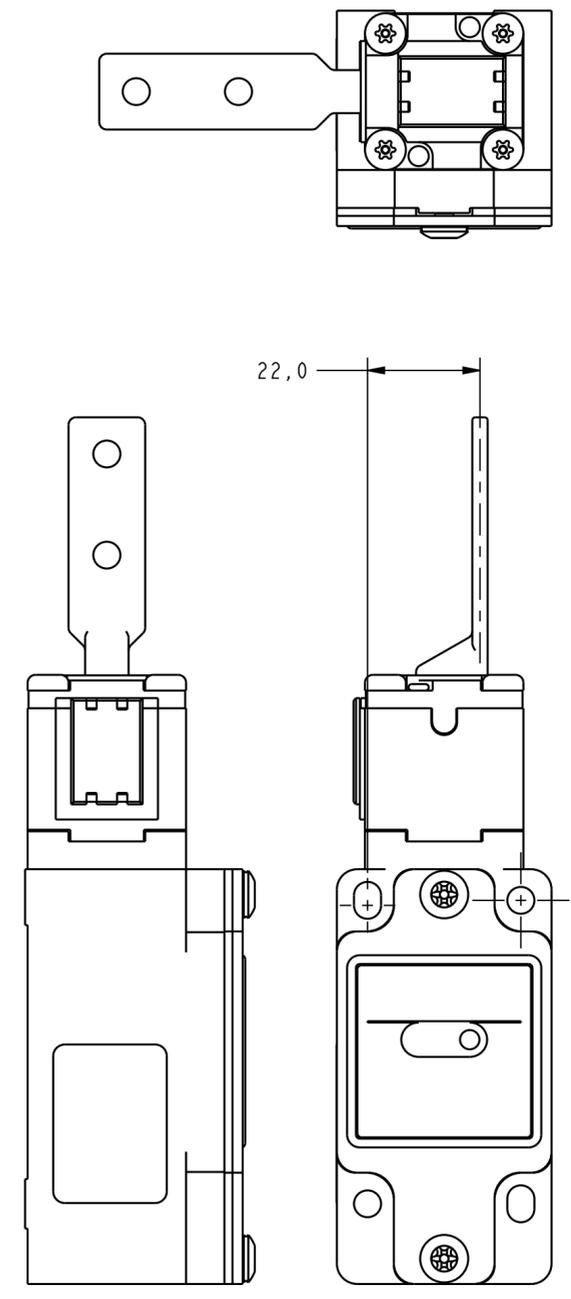

HEAD CODE P

P.T.C./CAD 3D
 DRAWN MAM 31 AUG 98 CHECK JAF 12MAY99
 CHECK DVM 21SEP06
 CHECK CMH 12OCT12
 RELEASE NO. PR-23758
 REPLACES
 M GK SERIES CHART 3
 DRAWING NUMBER
 PAGE 3 OF 8
 ISSUE 3233

REVISIONS

L	0083578	
M	0094570	10NOV11
		12OCT12

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.


MICRO SWITCH
a Honeywell Division

SWITCH - LIMIT

CATALOG LISTING
GK SERIES CHART 3


ANSI Y14.5M-1982 APPLIES
FED. MFG. CODE 91929

THIRD ANGLE PROJECTION		
SCALE FULL		
DO NOT SCALE PRINT		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	± .030
TWO PLACES	(.00)	± .015
THREE PLACES	(.000)	± .005
ANGLES		±
WEIGHT APPROX .5 HG / 1 LB		

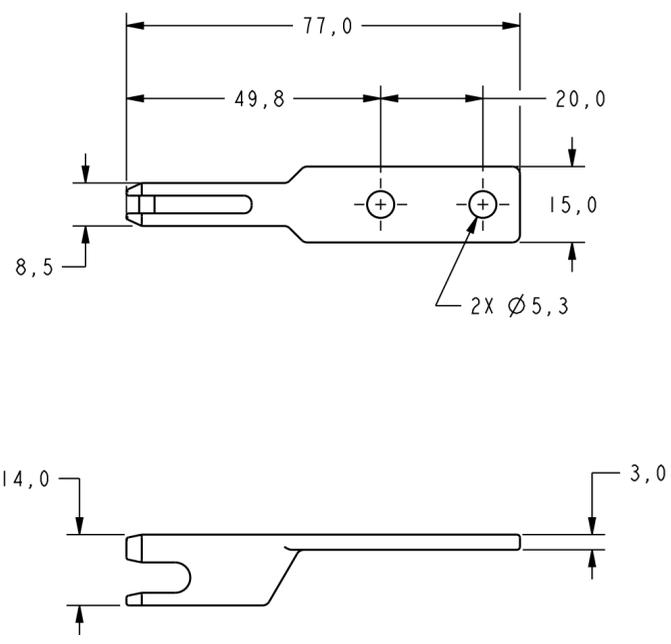

KEY CODE 6

P.T.C./CAD 30
 DRAWN MAM 31 AUG 98 CHECK JAF
 CHECK DVM 12MAY99
 CHECK CMH 12OCT12
 CHECK 21SEP06
 RELEASE NO. PR-23758
 REPLACES
 DRAWING NUMBER
 ISSUE 3233
 GK SERIES CHART 3
 PAGE 4 OF 8

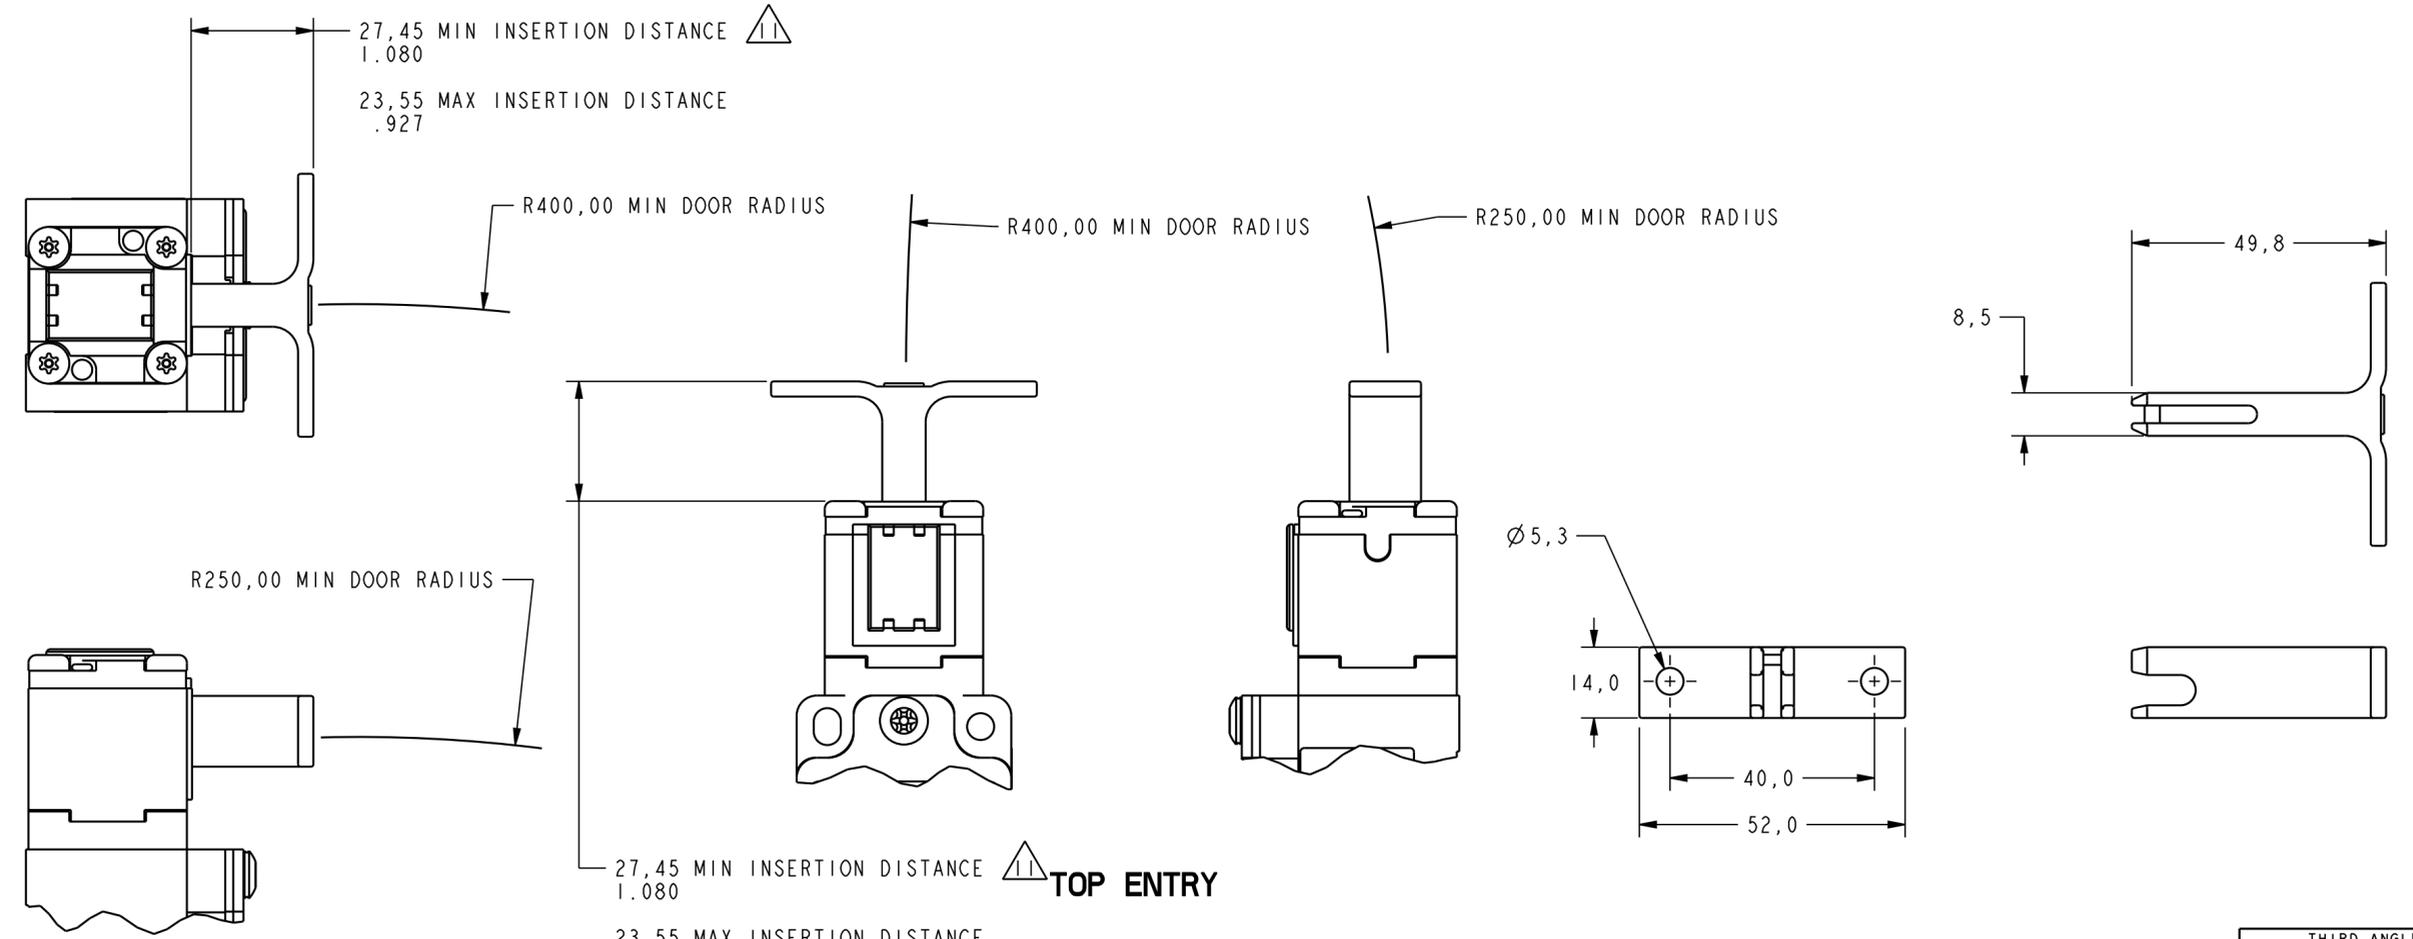

KEY CODE 7





THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division


SWITCH - LIMIT

CATALOG LISTING
GK SERIES CHART 3

THIRD ANGLE PROJECTION		
SCALE FULL		
DO NOT SCALE PRINT		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	± .030
TWO PLACES	(.00)	± .015
THREE PLACES	(.000)	± .005
ANGLES		±
WEIGHT APPROX .5 KG / 1 LB		

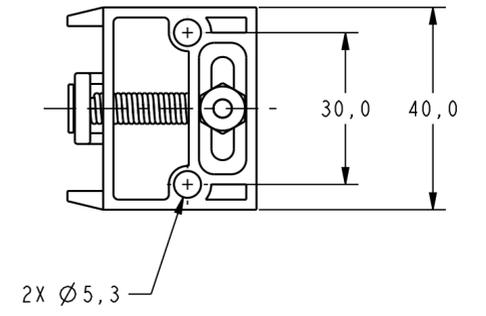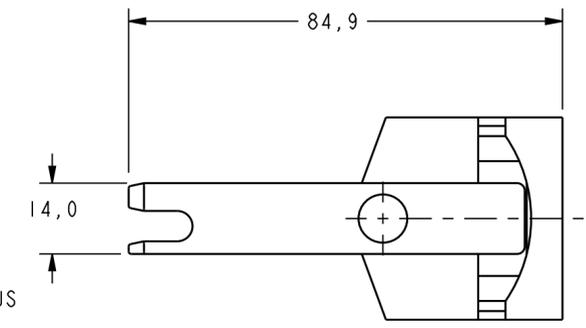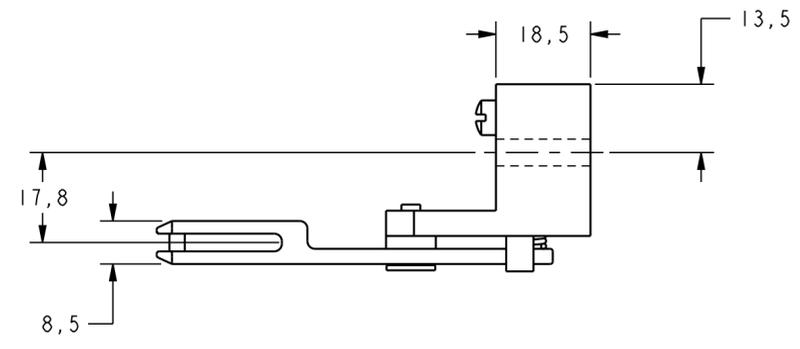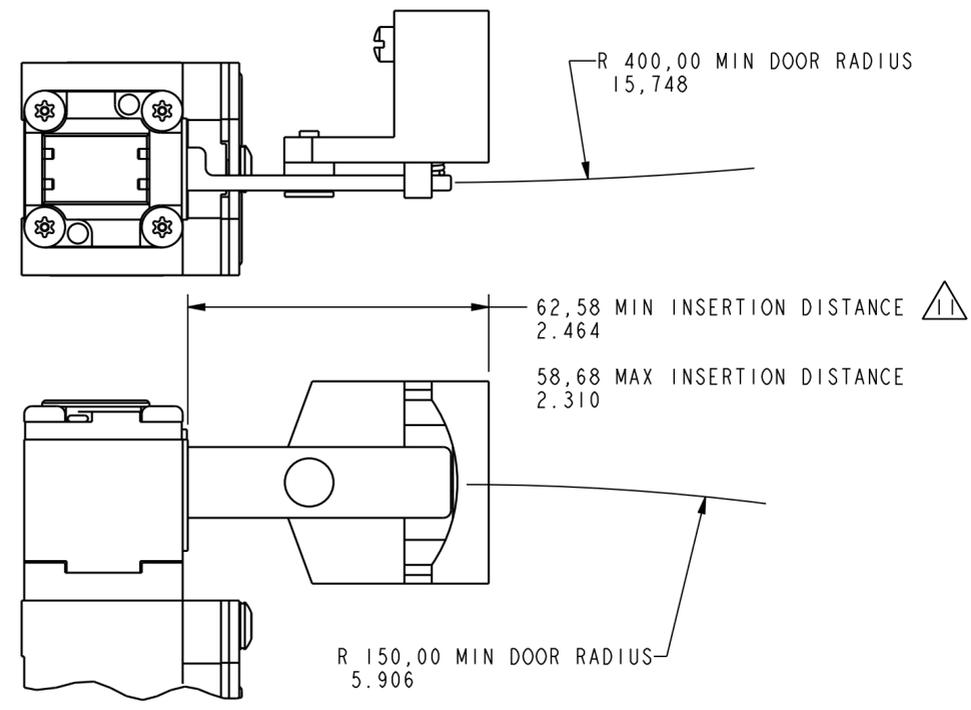

FRONT ENTRY

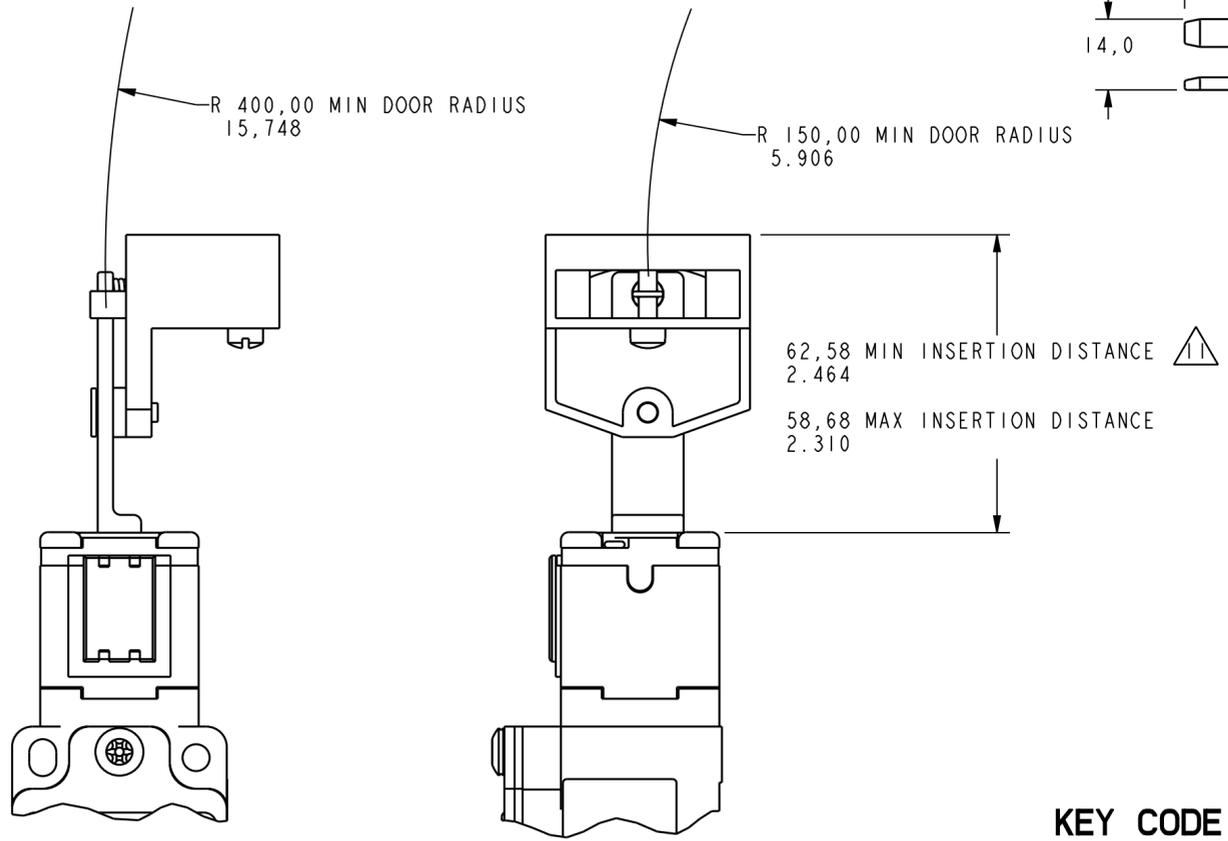

TOP ENTRY

KEY CODE 8

P.T.C./CAD 30
 DRAWN MAM 1 SEP 98 CHECK JAF
 CHECK DVM
 CHECK 12MAY99
 CHECK CMH
 CHECK 12OCT12
 RELEASE NO. PR-23758
 REPLACES
 GK SERIES CHART 3
 PAGE 5 OF 8
 ISSUE 3233
 DRAWING NUMBER
 REVISIONS
 L 0083578
 M 0094570
 21SEP06
 12OCT12

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

SWITCH - LIMIT


CATALOG LISTING
GK SERIES CHART 3

ANSI Y14.5M-1982 APPLIES
FED. MFG. CODE 91929



THIRD ANGLE PROJECTION		
SCALE FULL		
DO NOT SCALE PRINT		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±
WEIGHT APPROX .5 KG / 1 LB		

CATALOG LISTING **GK SERIES CHART 3**
PAGE 7 OF 8
REPLACES
RELEASE NO. PR-23758
12OCT12
CMH
CHECK
21SEP06
DVM
CHECK
11 NOV 99
JAF
CHECK
11 NOV 99
LJK
DRAWN
PTC/CAD 3D

MODIFICATION CODE: F06

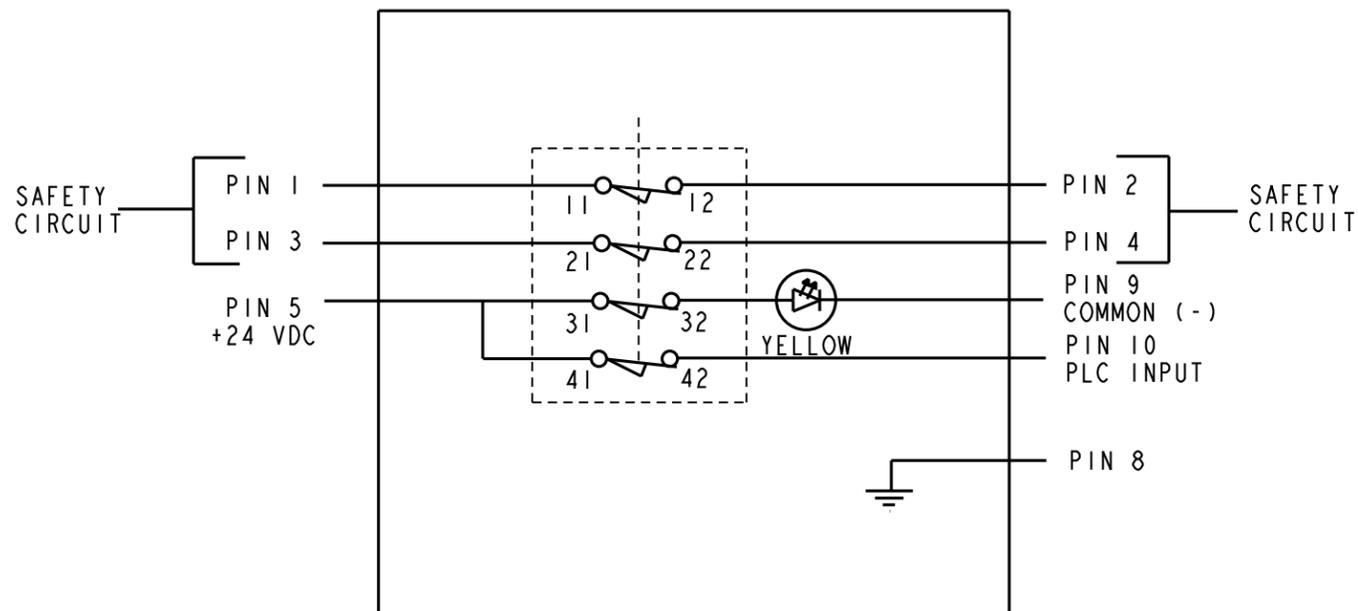

SWITCH DIAGRAM STATE SHOWN WITH KEY INSERTED

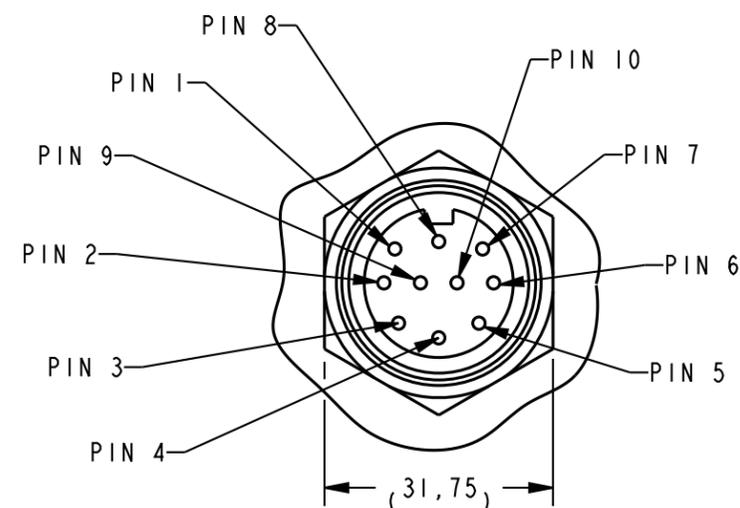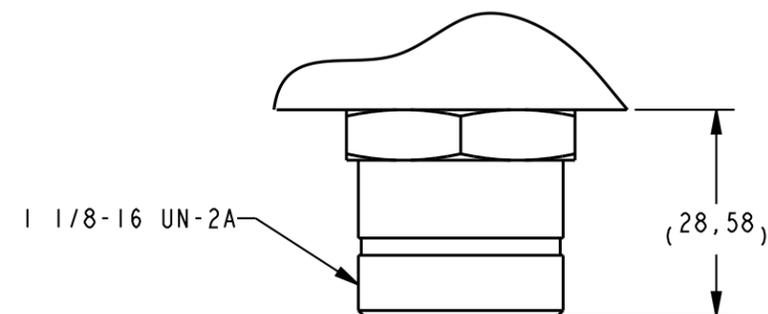

300V 2.5A
BRAD HARRISON PART NO. 47205-22
OR EQUIVALENT

THIRD ANGLE PROJECTION			
SCALE NONE			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :			
	DIM.	TOL	DIM.
	mm	mm/in	in
NO PLACES	X	1/.04	X.X 0.8/.03
ONE PLACE	X.X	0.4/.016	X.XX 0.38/.015
TWO PLACES	X.XX	0.15/.006	X.XXX 0.13/.005
THREE PLACES			
ANGLES			
DESIGN UNITS		SI METRIC	US CUSTOMARY
		<input checked="" type="checkbox"/>	<input type="checkbox"/>
WEIGHT APPROX .5KG / 1LB			

MODIFICATION CODE: FW

CATALOG LISTING **GK SERIES CHART 3**

PAGE 8 OF 8

REPLACES

RELEASE NO. PR-23758

12OCT12

CMH

ISSUE **33**

CHECK

REVISIONS

L	0083578	MBH	10NOV11
M	0094570	SBH	12OCT12

RS

CHECK

SAV

CHECK

18 JAN 00

SAV

CHECK

18 JAN 00

SAV


CHECK

18 JAN 00

PTC/CAD 3D

DRAWN


ANSI Y14.5M-1982 APPLIES

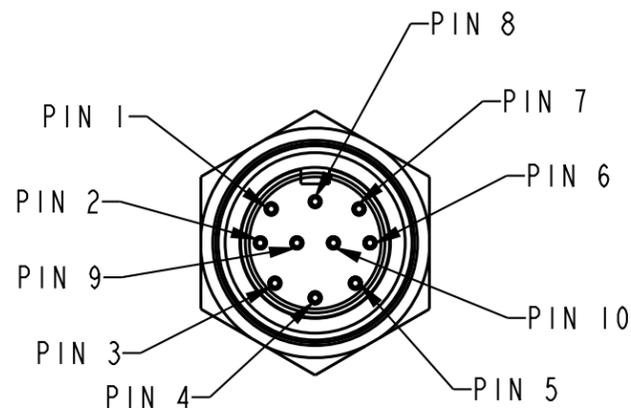


10-PIN CONNECTOR 

NOTES

- 1 - THE TWO COVER SCREWS ARE COMBINATION DRIVE, THE FOUR HEAD SCREWS ARE T-15 TAMPER PROOF TORX DRIVE (DRIVER BIT IS PROVIDED)
-  10-PIN CONNECTOR, BRAD HARRISON PART NO. 47205-22 OR EQUIVALENT

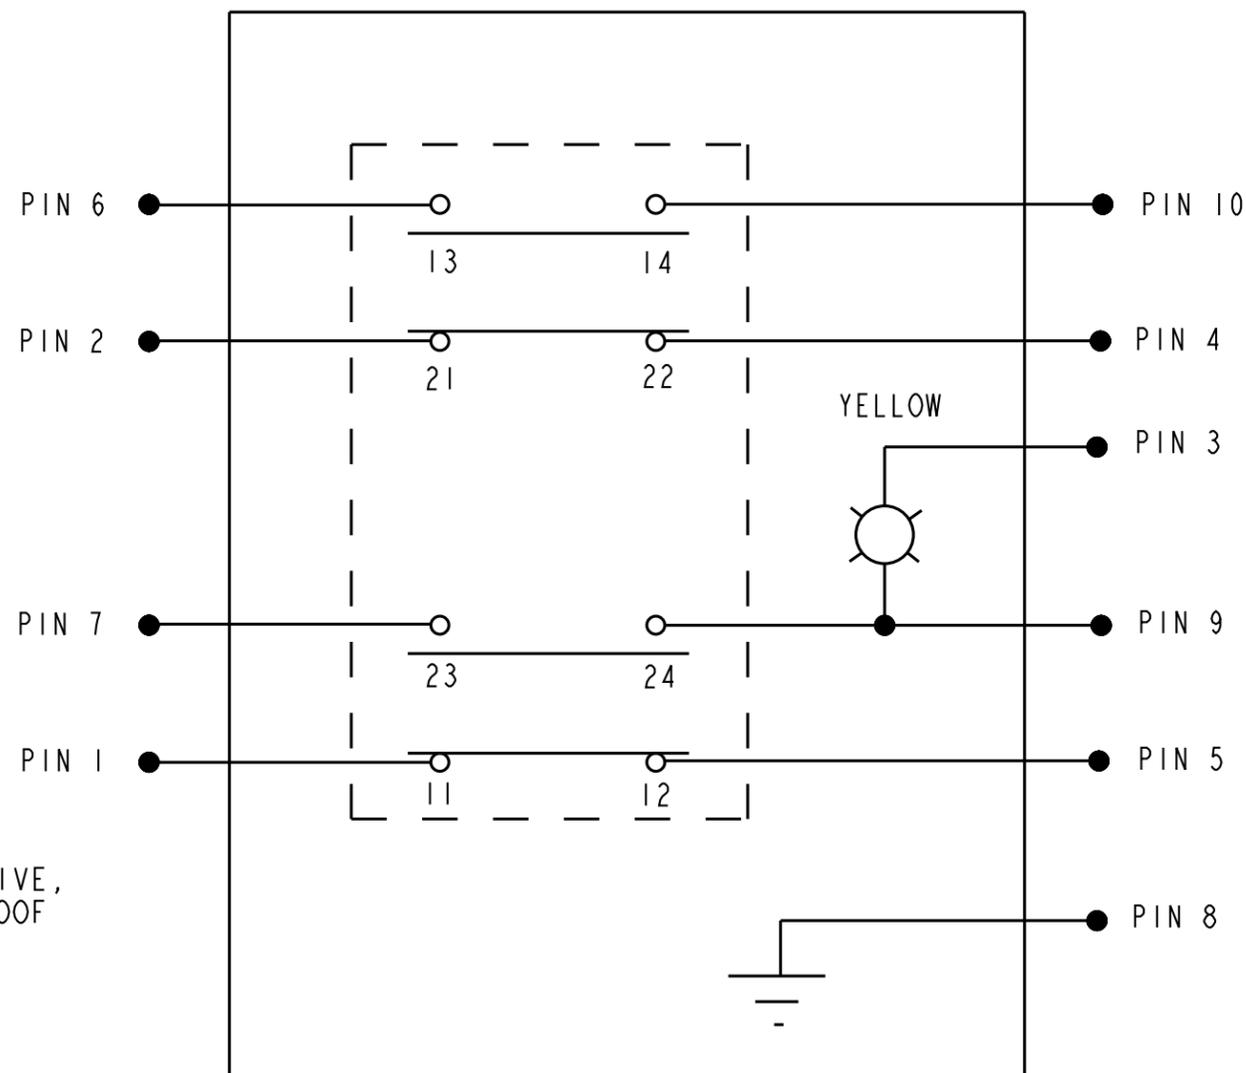

**BASIC SWITCH TO 10-PIN CONNECTOR
CIRCUIT DIAGRAM
DIAGRAM SHOWN WITH KEY INSERTED**

THIRD ANGLE PROJECTION			
			
SCALE NONE			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE :			
	DIM.	TOL	DIM.
	mm	mm/in	in
NO PLACES	X	1/.04	X.X 0.8/.03
ONE PLACE	X.X	0.4/.016	X.XX 0.38/.015
TWO PLACES	X.XX	0.15/.006	X.XXX 0.13/.005
THREE PLACES			
ANGLES			
DESIGN UNITS		SI METRIC	US CUSTOMARY
		<input checked="" type="checkbox"/>	<input type="checkbox"/>
WEIGHT 0,4 KG / 1LB			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[GKBA30LX](#) [GKBA10L6](#) [GKBA14L9](#) [GKBA2LX](#) [GKBB14L9](#) [GKBC1L6](#) [GKBC1L7](#) [GKDA14L7](#) [GKDD3M9](#)