

Single phase, non-stabilised dc power supply **GLC 230/24-10**



Advantages

Fuse protection in the input and a fuse protection for the output
Separate windings
Capacitor accessories
Double screw terminals on the output
DC OK signalling via LEDs
Panel installation on mounting rails

Applications

Robust direct current power is concentrated on the core task of voltage and power supply.

Standards



Non-stabilised dc power supply / Safety isolating transformer
to VDE 0570 part 2-6, EN 61558-2-6, IEC 61558-2-6, UL 1012

Approvals




UL 5085-1/-2, CSA 22.2 No.66



Single phase, non-stabilised dc power supply GLC 230/24-10

Type		GLC 230/24-10
Electrical data	Input	
	Input rated voltage	230 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Output rated voltage	24 Vdc
	Power	240.00 W
	Output rated current	10.00 A
	Ripple factor	#5 %
	Standards	
	Classification	Single phase non-stabilised dc power supply / safety isolating transformer
	Approvals	
	Approvals	cURus (transformer only)
	Environment	
	Cooling method	by self cooling
	Ambient temperature max.	60° C
Safety and protection		
Type	enclosed	
Class of Insulation System	E	
Protection index	IP 00	
Safety class (prepared)	II	
Short circuit strength	short-circuit proof	
Order numbers		
Order Number	GLC 230/24-10	

Type		GLC 230/24-10
Mechanical data	Terminal and mounting	
	Terminals	Screw-type terminals
	Fixing method	DIN Rail system TH 35, additional with screws
	Measures and weights	
	Weight	7.30 kg

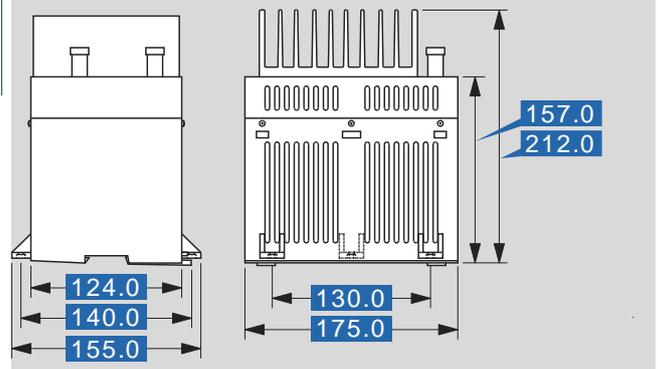

Subjects to change.