



Operating Characteristics

Magnetic Sensitivity (Range - Pull In)	7 to 30 Ampere Turns
Magnetic Sensitivity (Range - Drop Out)	(See chart below)
Operate Time, including bounce (typ.)	1.0 Milliseconds
Release Time (typ.)	0.1 Milliseconds
Resonant Frequency (typ.)	3.2 kHz
Vibration, 10-2,000 Hz (G's Max.)	50 G
Shock, 11-ms. 1/2 Sine wave (G's Max.)	100 G
Operating Temperature	-40°C to + 125°C
Storage Temperature	-50°C to + 155°C


Charts

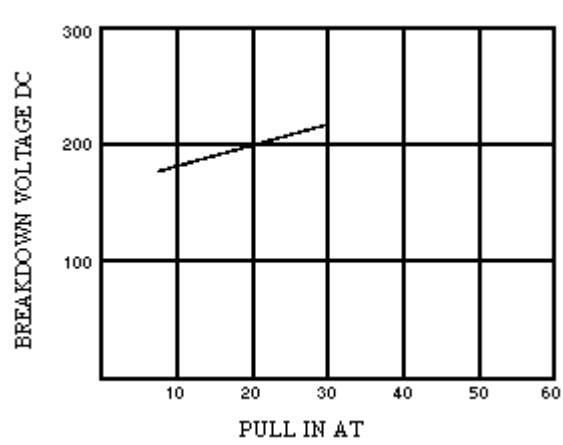


Breakdown Voltage Plotted
Against Pull-In Ampere Turns

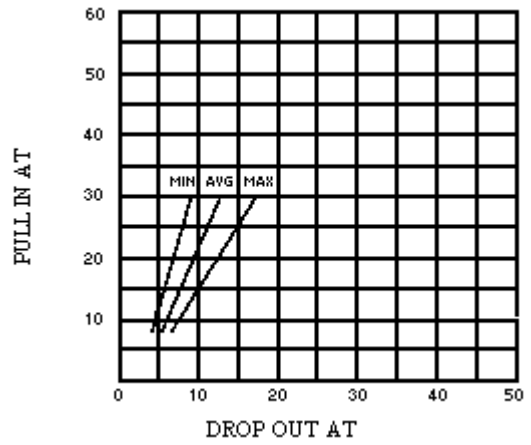

Pull-In Ampere Turns Plotted
Against Drop-Out Ampere Turns

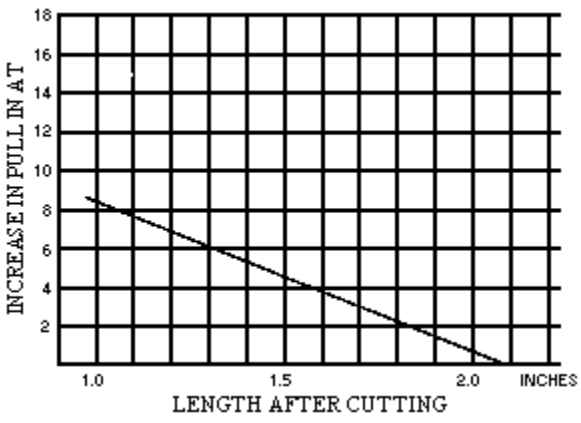

Change In Pull-In Ampere Turns
After Switch Lead Cutting

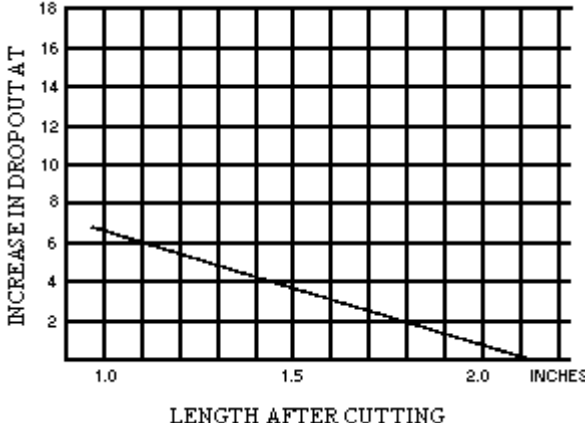

Change In Drop-Out Ampere Turns
After Switch Lead Cutting

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Standex Electronics:](#)

[GP501202501](#) [GP501152001](#) [GP501101501](#)