


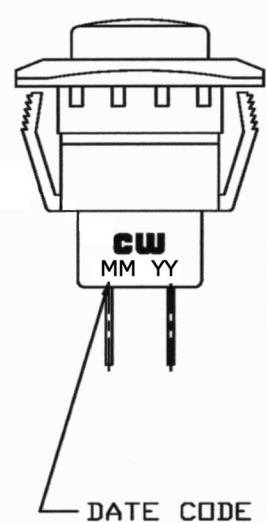

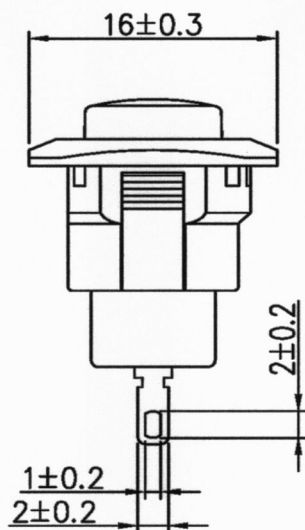


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	3A. 125V , 1. 5A 250V AC		CULUS	Mounting Hole		 SPST OFF - (ON) () = Momentary
Contact Resistance	50m ohm max.			Cut-Out 3 mm thk. max		
Insulation Resistance	DC 500V 100M ohm min.					
Dielectric Strength	AC 1000V 1 minute					
BASE COLOR: Black						
BUTTON COLOR: Black						

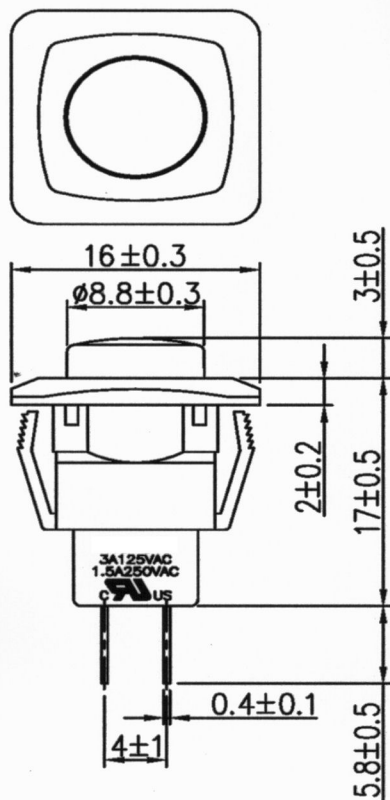

RoHS Compliant

 INDUSTRIES Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com	Date Drawn: 1/27/10	Rev. 0	Unit: mm	Checked By: G. Guld
	Title: PUSH BUTTON SWITCH		CW P/N: GPB510A05BB	