



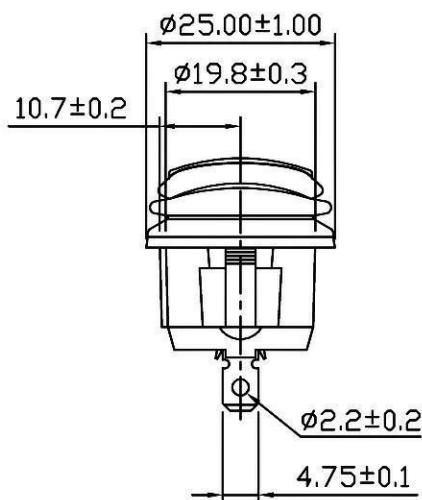


Rating	20A 12VDC		Mounting Hole	
	Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute		Thickness: 1.5~2.5	
Operation Temp.	- 20°C ~ 85°C			
Switch Function	3P SPST ON-OFF (LED)		Thickness: 0.7~2.5	

Circuit Diagram

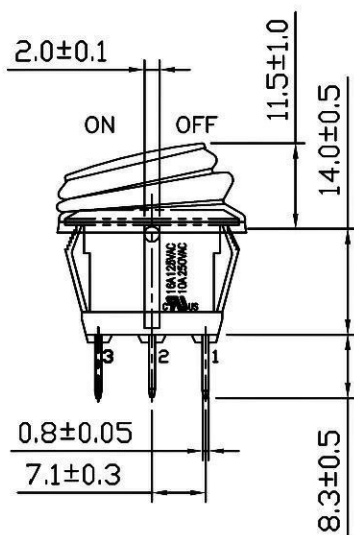

*MATERIAL:
 Frame: Nylon 66 (94-V2), Black
 Actuator: PC (94-V2), Red
 Waterproof rubber: Silicone
 Terminals: Silver plated, Copper alloy
 Hot Stamping: None
 Waterproof: IP65



RoHS Compliant

CW INDUSTRIES
 Southampton, Pa. 18966
 Tel 215.355.7080/www.cwind.com

Date Drawn: 12/25/08

Rev. 0

Unit: mm

Checked By: GG

Title: **ROCKER SWITCH**

CW P/N: **GRB112B802BR1**

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CW Industries:](#)

[GRB112B802BR1](#)