

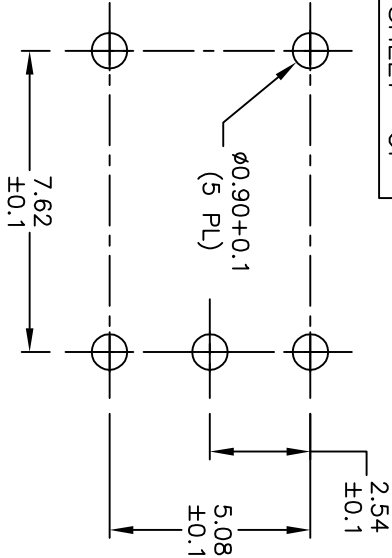
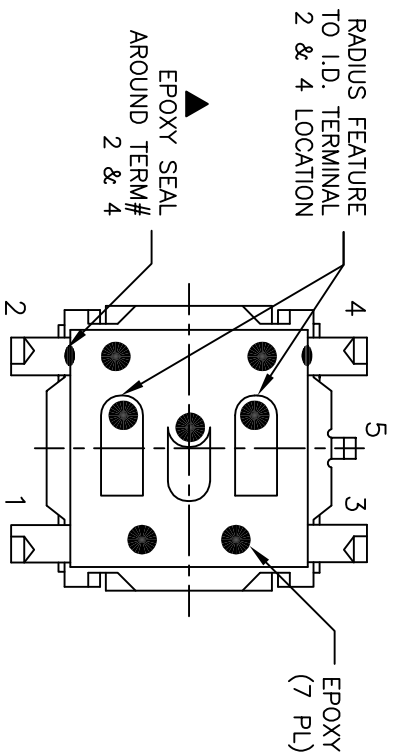



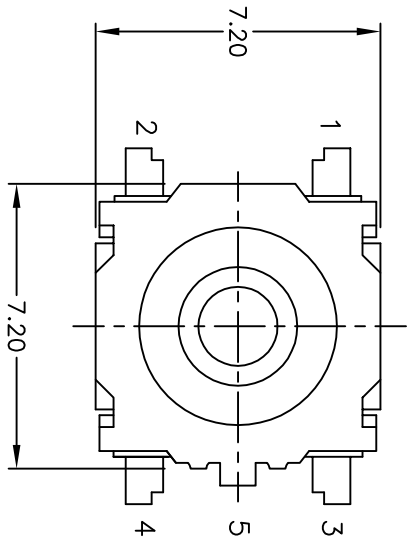


RECOMMENDED P.C.B. LAYOUT

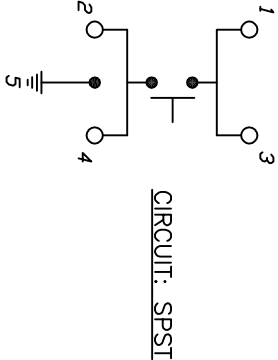

BOTTOM VIEW

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
 3. TERM. NOS. FOR REF. ONLY
 4. ACTUATION FORCE: $130 \pm 40gf$
 5. TRAVEL TO MAKE: $0.3mm + 0.4/0.0$
 6. RATING: 30mA, @12V DC
 7. CONTACT RESISTANCE: 50 MILLI-OHMS (Initial)
 8. DIELECTRIC STRENGTH: 300 V RMS min at sea level.
 9. ELECTRICAL LIFE CYCLE: 400,000 make & break cycles at full load.
 10. ▲ DESIGNATE MAJOR DIMENSIONS.
 11. OPERATING TEMP.; $-40^{\circ}C$ to $+85^{\circ}C$
 12. 2002/95/EC (ROHS) COMPLIANT

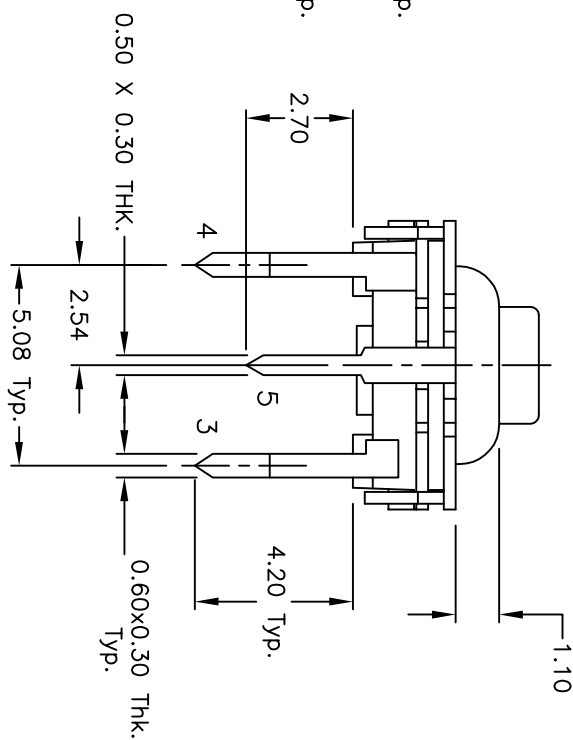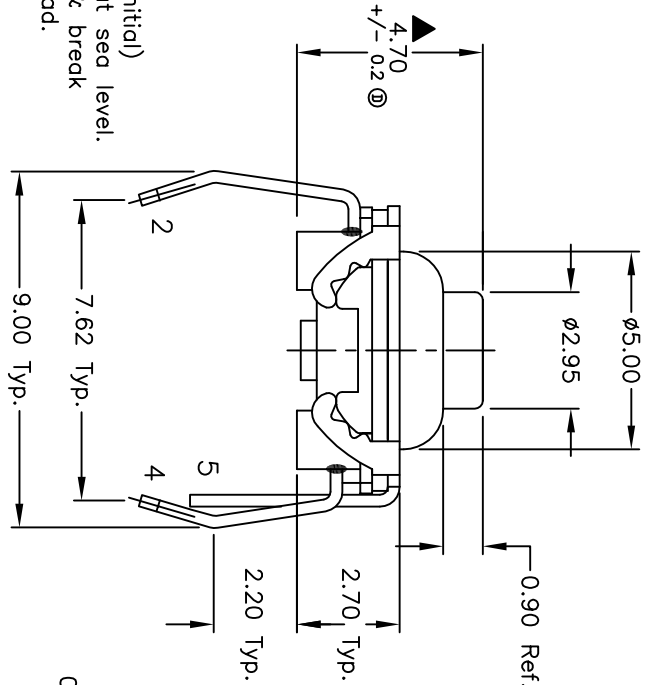

D	18193	BUTTON LENGTH TOLERANCE CHG.	7/31/08	BLR	 E-SWITCH TITLE GSE 4.70 F130 QP EARTH GROUND WASHABLE TACT SWITCH			
C	12191	REVISED NOTE 9, ADD NOTE11	5/28/02	CB				
B	10888	REVISED AND REDRAWN	1/27/99	MM	SCALE 5:1 DATE 7/31/08 DR BLR DWG L400100 REV D			
REV.	ECN No.	DESCRIPTION	DATE	CHKD				

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[GSE4.70F130QP](#)