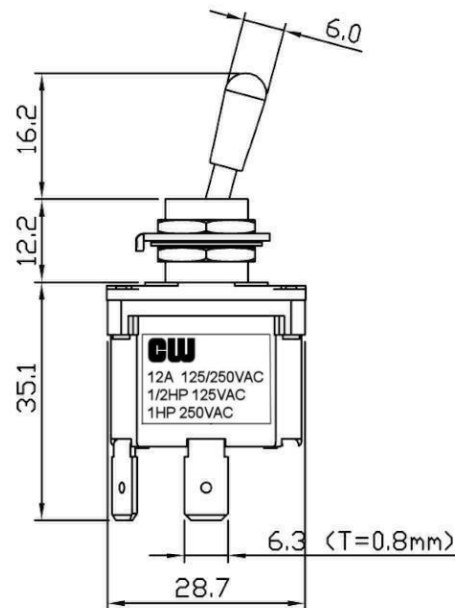
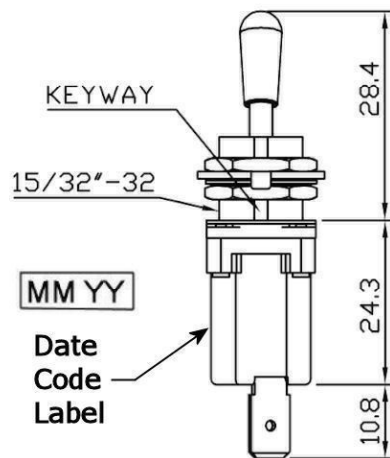



Contact resistance: 20m ohm max. (initial)
 Insulation resistance: 100M ohm min. (at 500V DC)
 Dielectric strength: 1,500V AC 50/60 Hz for 1 minute
 Service life: Mechanically: 100,000 operations min.
 Electrically: 30,000 operations min.
 Rating: 12A 125V AC / 250V AC
 1/2 HP 125VAC / 1HP 250VAC / 5A 125VAC "L"
 Function: OFF - ON SPST
 KEYWAY
 POSITION
 Actuator: Brass / Dull Nickel Plated
 Waterproof rating: IP68

cw INDUSTRIES
Southampton, Pa. 18966
Tel 215.355.7080/www.cwind.com

Checked By: G. GULD

TOGGLE SWITCH

GTB2B12

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CW Industries:](#)

[GTB2B12](#)