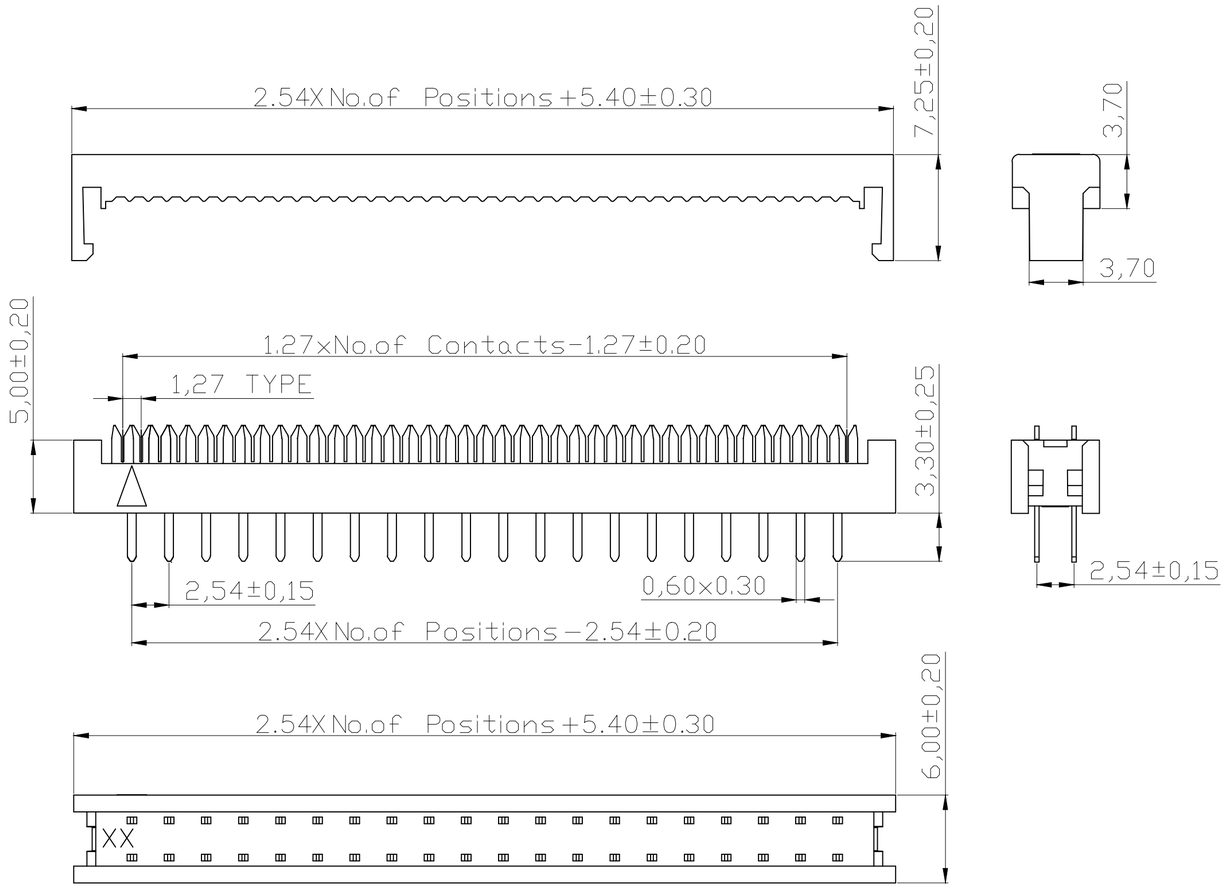

NOTES:

MATERIAL
1.Insulator
Material:PBT+30%GF(UL94V-0),Grey
2.Contact Material : Brass
3.Contact Plating : Sn Over 50µ" Ni
ELECTRICAL
1.Current Rating : 3.0AMP
2.Withstand Voltage : 1000V AC/DC
4.Contact Resistance : 20mΩ max
5.Insulation Resistance: 1000MΩ min
ENVIRONMENTAL
1.Operation Temperature: -40°C to +105°C
2.Packing : Tray

⑤ Order Information:
contacts xx : 06,08,10,12,14,16,18,20,22,24,26
28,30,32,34,36,38,40,50,60,64

⑦

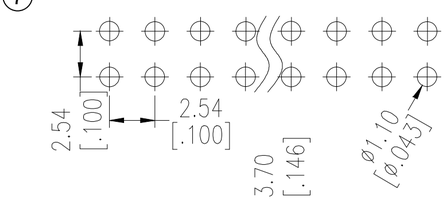

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

RoHS compliant
Unit: mm

⑥ UL File No.: E198287

Scale	Free
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Id.	Modification	Date	Name
⑦	Add recommended PCB layout	16.07.2015	Ray
⑥	Add UL file no.	12.12.2013	Amy
⑤	Add multiple pin	17.09.2013	Winnie
④	Add 18pin product	06.09.2013	Ray
③	Update	16.03.2009	Dean
②	Redraw	09.03.2009	Dean

	Date	Name
Drawn	31.07.2006	Hellwig
Approved	16.07.2015	Ray

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AWLP xx/3,2-T

Drawing-No.
ASS 1197 CO

rev07

Replace dd 15.11.01

Sheet

SV3215

AMEYA360
Components Supply Platform

Authorized Distribution Brand :

Website :

Welcome to visit www.ameya360.com

Contact Us :

- Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

- Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

- Customer Service :

Email service@ameya360.com

- Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com