


Valise Twist-Lock® Plugs and Connectors

HUBBELL

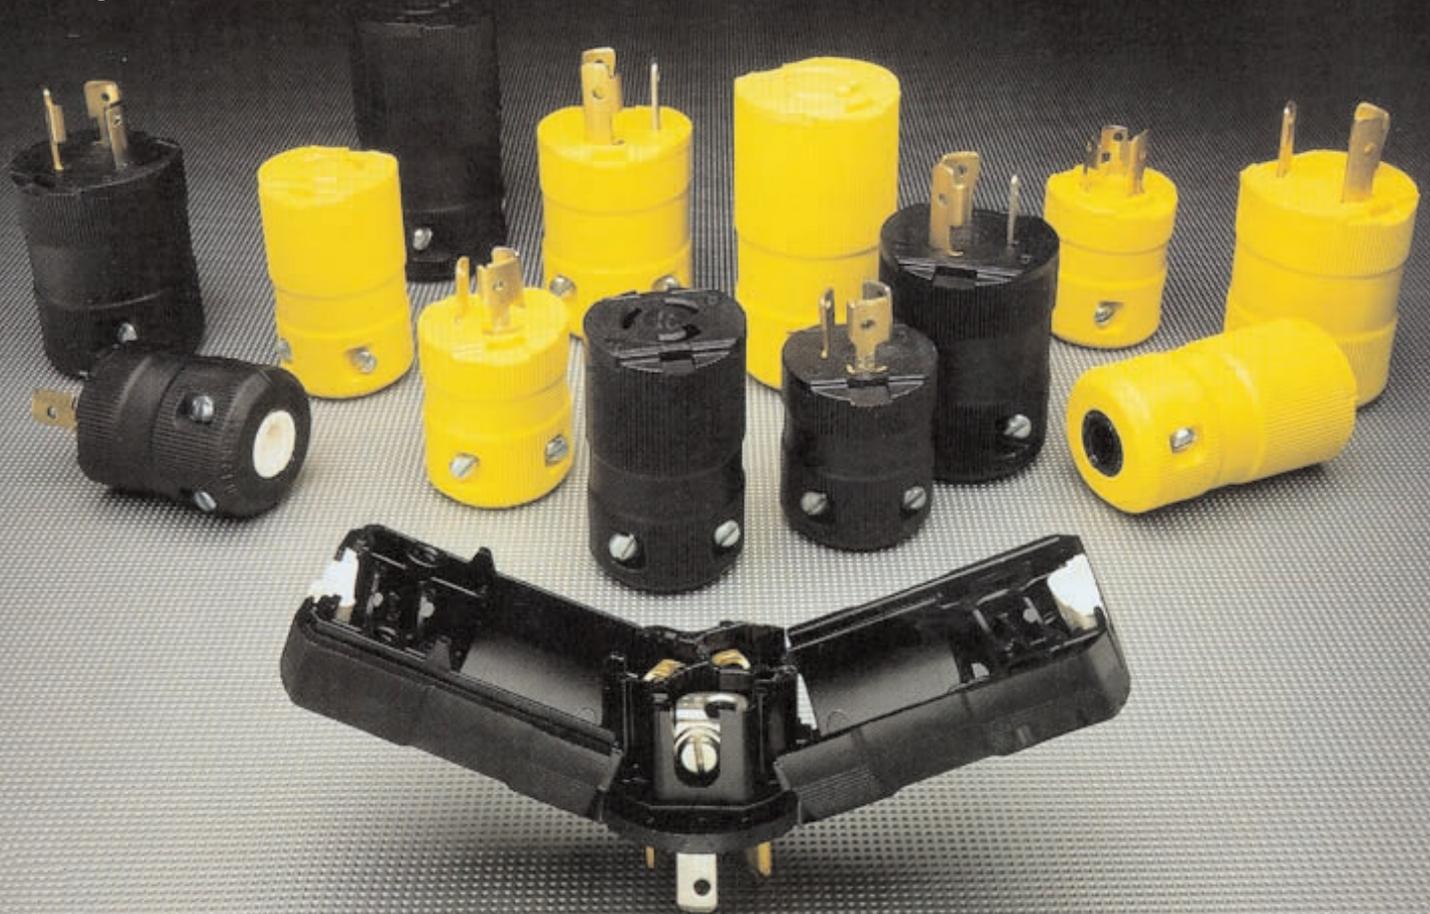

Hubbell's line of Valise Twist-Lock® Plugs and Connectors features devices available in traditional black with white cord grips and "high visibility" yellow with black cord grips. The removable cord grip inserts offer a simple way of

accommodating a wide range of cord diameters, while providing a powerful hold to prevent slippage and strain. The tough nylon body is designed for easy installation and includes captive screws which stay in place while wiring.

Features

- One piece Valise style body
- Superior terminations
- Totally insulated housing
- Fast and simple assembly
- Available in black and "high visibility" yellow


Benefits

- As the device folds to grip the cord, unique interlocking lugs secure the body together for strength and security, even with rough use.
- The terminals bundle the conductors to provide high quality, long lasting electrical connections.
- The all thermoplastic body design provides maximum safety in the face of abuse.
- The cord grip screws also assemble the device for quick assembly without compromising function.
- Perfect for use in industrial, entertainment, and construction applications.

Ordering Information

RATING	CONFIG.	PLUG CAT NO.		CORD RANGE	RATING	CONFIG.	CONNECTOR CAT NO.		CORD RANGE
		BLACK	YELLOW				BLACK	YELLOW	
15A 125V		HBL4723VBK	HBL4723VY	.220-.660 (5.6-16.8)	15A 125V		HBL4729VBK	HBL4729VY	.220-.660 (5.6-16.8)
15A 250V		HBL4573VBK	HBL4573VY	.220-.660 (5.6-16.8)	15A 250V		HBL4579VBK	HBL4579VY	.220-.660 (5.6-16.8)
15A 277V		HBL4773VBK	HBL4773VY	.220-.660 (5.6-16.8)	15A 277V		HBL4779VBK	HBL4779VY	.220-.660 (5.6-16.8)
20A 125V		HBL2311VBK	HBL2311VY	.325-.720 (8.26-18.3)	20A 125V		HBL2313VBK	HBL2313VY	.325-.720 (8.26-18.3)
20A 250V		HBL2321VBK	HBL2321VY	.325-.720 (8.26-18.3)	20A 250V		HBL2323VBK	HBL2323VY	.325-.720 (8.26-18.3)
20A 277V		HBL2331VBK	HBL2331VY	.325-.720 (8.26-18.3)	20A 277V		HBL2333VBK	HBL2333VY	.325-.720 (8.26-18.3)
30A 125V		HBL2611VBK	HBL2611VY	.590-9.30 (15.0-23.6)	30A 125V		HBL2613VBK	HBL2613VY	.590-9.30 (15.0-23.6)
30A 250V		HBL2612VBK	HBL2621VY	.590-9.30 (15.0-23.6)	30A 250V		HBL2623VBK	HBL2623VY	.590-9.30 (15.0-23.6)

Dimensions

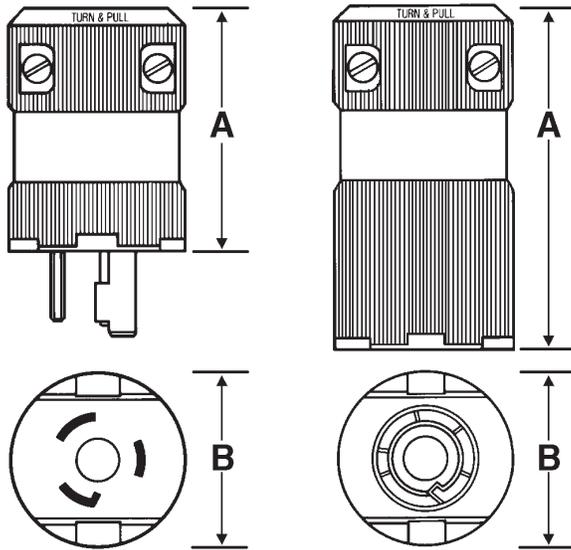

	15A		20A		30A	
	PLUG	CONN.	PLUG	CONN.	PLUG	CONN.
A	1.88" (47.8)	2.59" (65.8)	2.50" (63.5)	2.60" (66.0)	2.50" (63.5)	2.60" (66.0)
B	1.50" (38.1)	1.50" (38.1)	1.78" (45.2)	1.78" (45.2)	1.78" (45.2)	1.78" (45.2)



All black option

Cord Grips are available in packages of 40 to make an all black appearance.
Catalog No. **HBLVCGBK**

Specifications

UL Listed
CSA Certified
CE

Technical

Housing	Nylon
Cord Grips	PPO
Contacts	Brass
Screens	Plated Steel
Wire Clamp	Plated Steel



Wiring Device - Kellems

Hubbell Incorporated (Delaware) • 185 Plains Road • Milford, CT 06460-2420 • (203) 882-4800 • FAX (800) 255-1031
World Wide Web URL: <http://www.hubbell-wiring.com>

Worldwide Locations

Hubbell Canada (905) 839-1138, Fax (905) 839-9108
Hubbell Ltd. England (441) 234-855444, Fax (441) 234-854008
Hubbell-Taian Co., Ltd., (886) 2 567-5995, Fax (886) 2 567-4853
Hubbell Int'l. Inc., Korea Branch (82) 2 607-1362, Fax (82) 2 603-7386

Hubbell de Mexico, S.A. de C.V. (52) 5 575-2022, Fax (52) 5 559-8626
Caribe Sales Agencies, Puerto Rico (809) 720-7185, Fax (809) 789-2796
Hubbell S.E. Asia Pte., Ltd., (65) 382-1600, Fax (65) 382-3727
Hubbell Inc. Middle East (971) 4 369-763, Fax (971) 4 360-541