
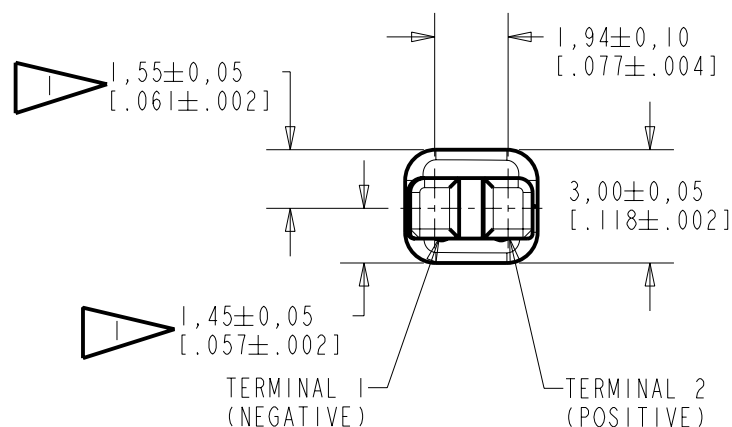


# HC-23772-000

## SHT 1.1

NOTE:


LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED TO  $\pm 0,17$  [.007].

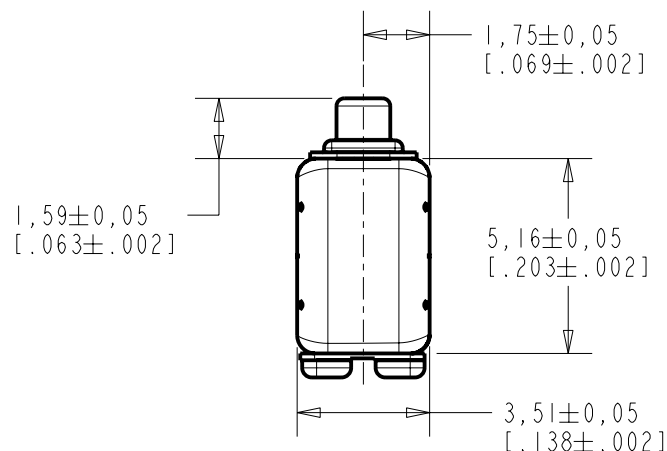

SCALE 2:1

NOMINAL WEIGHT  
.23 GRAMS

DIMENSIONS IN MILLIMETERS [INCHES]

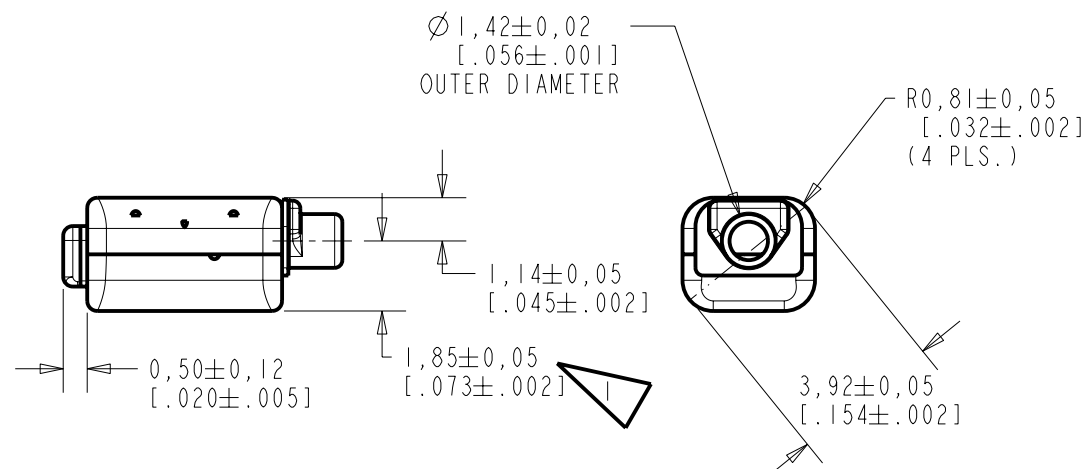

| Revision | C.O. #    | Implementation Date | RELEASE LEVEL | REVISION |
|----------|-----------|---------------------|---------------|----------|
| C        | CI0106784 | 12-04-07            | Released      | C        |
| B        | CI0103946 | 2-20-06             |               |          |
| A        | CI0103365 | 11-29-05            |               |          |

SCALE: 5:1

DO NOT SCALE DRAWING

TITLE: RECEIVER

OUTLINE DRAWING

HC-23772-000

SHT 1.1

| DR. BY  | DATE     |
|---------|----------|
| AB      | 11-29-05 |
| CK. BY  | DATE     |
| GJP     | 12-5-05  |
| APP. BY | DATE     |
| GJP     | 12-5-05  |

**KNOWLES ELECTRONICS**  
ITASCA, ILLINOIS U.S.A.

DESCRIPTION


NO DAMPING

HC-23772-000

SHEET 2.1

THE HC-23772-000 IS A MAGNETIC BALANCED ARMATURE RECEIVER INTENDED FOR USE IN ITC AND CIC HEARING INSTRUMENTS. THE HC FAMILY OFFERS 6 dB HIGHER OUTPUT LEVELS IN THE SAME SIZE PACKAGE AS THE FC FAMILY. ALL HC UNITS HAVE SHOCK PROTECTION. THIS MODEL HAS MEDIUM-HIGH IMPEDANCE AND IS UNDAMPED.

NOTE: SPECIFICATIONS FOLLOWED BY AN ASTERISK (\*) ARE 100% TESTED.

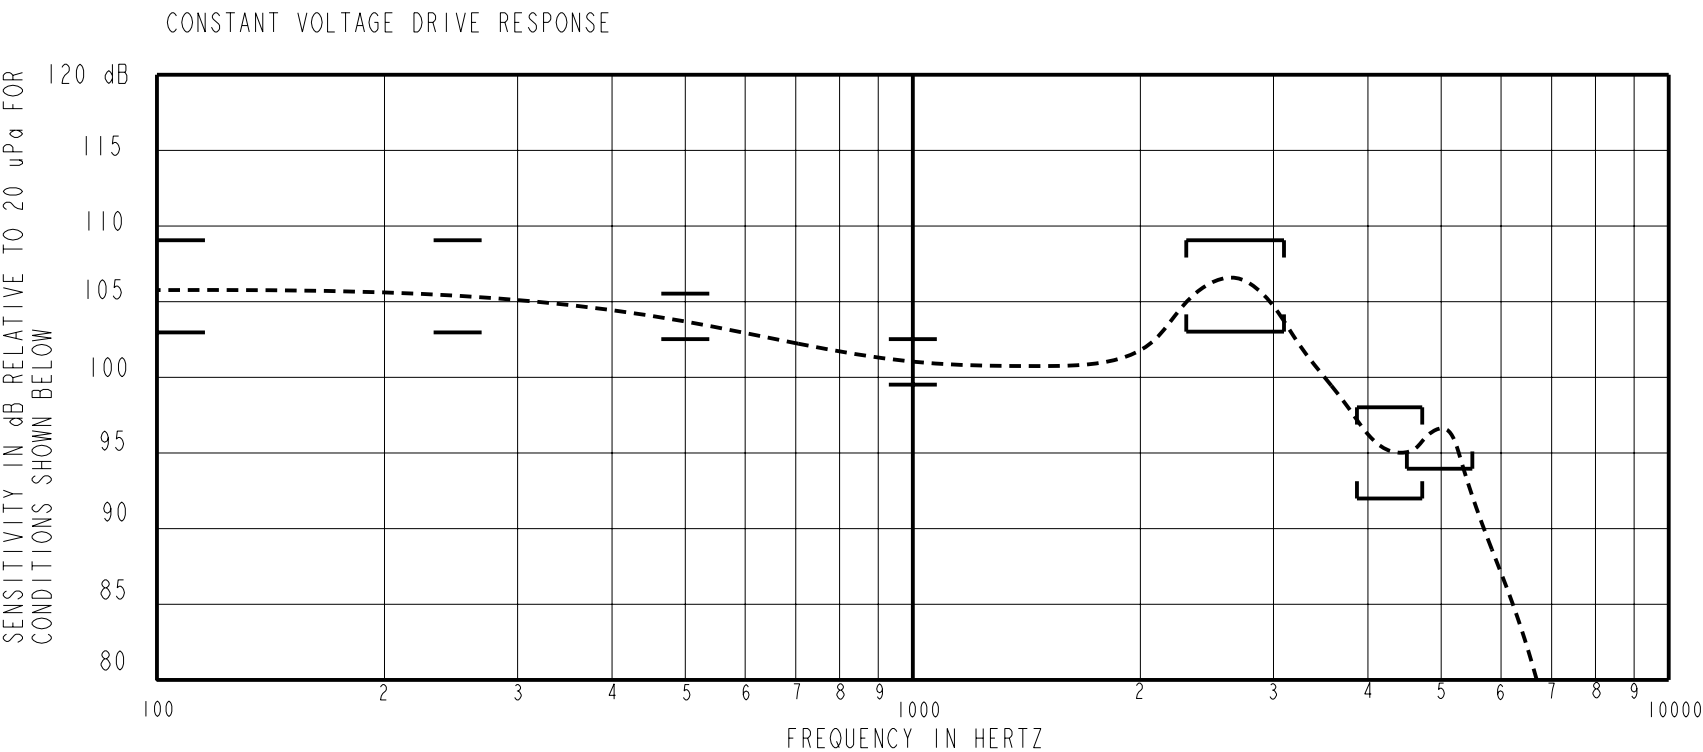

ACOUSTICAL

SENSITIVITY\*  
DEVICE WILL PRODUCE THE SPL LISTED BELOW WUTH THE TEST CONDITIONS DESCRIBED IN TABLES 3. NOMINAL SENSITIVITY AT 1 kHz IS dB RELATIVE TO 20uPa. ALL OTHER VALUES IN dB RELATIVE TO THE SENSITIVITY AT 1 kHz.

| FREQUENCY (Hz)   | MINIMUM | NOMINAL | MAXIMUM |
|------------------|---------|---------|---------|
| 100              | +2      | +5      | +8      |
| 250              | +2      | +5      | +8      |
| 500              | 1.5     | +3      | +4.5    |
| 1000             | -1.5    | 101.0   | +1.5    |
| 2300-3100 PEAK   | +2      | +5      | +8      |
| 3890-4750 VALLEY | -9      | -6      | -3      |
| 4500-5500 PEAK   | -7      | ---     | ---     |

TABLE 1.

TOTAL HARMONIC DISTORTION\*  
DEVICE WILL NOT EXCEED TOTAL HARMONIC DISTORTION LEVELS LISTED BELOW.

| FREQUENCY (Hz) | DRIVE (V RMS) | DC BIAS (mA) | LIMIT (%) |
|----------------|---------------|--------------|-----------|
| 900            | 0.475 V       | 0            | 5         |
| 1350           | 0.475 V       | 0            | 5         |
| 500            | 1.338 V       | 0            | 10        |

TABLE 2.

TEST CONDITIONS

|                        |                                               |
|------------------------|-----------------------------------------------|
| NOMINAL SOURCE VOLTAGE | 0.475 Vrms, 0 Vdc BIAS                        |
| SOURCE IMPEDANCE       | < 1 Ω                                         |
| TUBING                 | 10 mm (.394) LONG, 1 mm (.039) ID.            |
| COUPLER CAVITY         | 2 CC SIMULATED ANSI S3.7 TYPE HA-3, (IEC 126) |

TABLE 3.

POLARITY \*  
POSITIVE SIGNAL APPLIED TO TERMINAL 2 WILL PRODUCE A DECREASE IN SOUND PRESSURE AT THE SOUND OUTLET.


ELECTRICAL

|                      |            |   |
|----------------------|------------|---|
| DC RESISTANCE        | 388Ω ±10%  | * |
| IMPEDANCE @ 500 Hz   | 585Ω ±15%  | * |
| IMPEDANCE @ 1 kHz    | 1009Ω ±20% | * |
| INDUCTANCE @ 500Hz   | 139 ±15%   |   |
| CAPACITANCE @ 10 MHz | 6pF ±20%   |   |

TABLE 4.

ISOLATION: THE CASE WILL BE ELECTRICALLY ISOLATED FROM THE COIL CIRCUIT\*

MAGNETIC RADIATION  
WORST CASE: FIELD WILL BE LESS THAN LEVEL STATED BELOW AT AMPLIFIER CLIPPING (.920 V).  
134 dB re 1μA/m  
DISTANCE OF 6.3 mm FROM CENTER OF RECEIVER  
ANGLE OF 120 DEGREES FROM TUBE

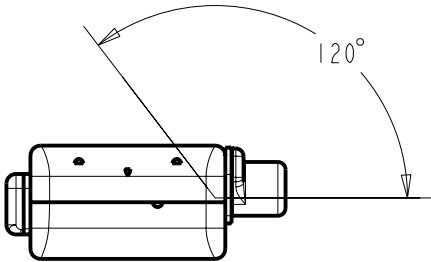

MECHANICAL

PORT LOCATION: 12C

SOLDER TYPE: 96.5% Sn, 3% Ag, 0.5% Cu ( LEAD FREE)

TEMPERATURE  
OPERATING: SENSITIVITY WILL NOT VARY MORE THAN +1/-3 dB FROM -17°C TO 63°C  
STORAGE: -40°C TO 63°C

RELIABILITY  
UNITS WILL SURVIVE ANY OF THE FOLLOWING ACCELERATED LIFE TESTS, REPORT AVAILABLE FROM QA DEPARTMENT

HALT TEST (8 WEEKS, 63°C, 95% RH, 0.83V, 500 Hz SIGNAL)  
HIGH TEMPERATURE STORAGE (63°C, 72 HOURS)  
LOW TEMPERATURE STORAGE (-40°C, 72 HOURS)  
DAMP HEAT CYCLING (ALTERNATE 25°C TO 63°C, 93% RH, 20 CYCLES)  
THERMAL SHOCK (-40°C TO 63°C, 5 CYCLES)  
SOLDER/DESOLDER CYCLING (5 CYCLES)  
SOLDER PAD STRENGTH (STRENGTH > 1.8 LBS.)  
STRESS TEST (8.88 Vrms AT 2700 Hz SIGNAL, 1 HOUR)  
MECHANICAL SHOCK  
LEAK TEST AFTER AGING (NO LEAK AFTER ANY OF THE ABOVE TESTS)

KNOWLES ELECTRONICS  
ITASCA, ILLINOIS U.S.A.

| Revision                                                                                                                                                                                                     | C.O. #    | Implementation Date | RELEASE LEVEL           | REVISION                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------------------|-------------------------|-----------------------------------|
| C                                                                                                                                                                                                            | C10106784 | 12-04-07            | Released                | C                                 |
| B                                                                                                                                                                                                            | C10103946 | 2-20-06             |                         |                                   |
| A                                                                                                                                                                                                            | C10103365 | 11-29-05            |                         |                                   |
| WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION |           |                     | DR. BY<br>AB            | DATE<br>11-29-05                  |
| TITLE: RECEIVER                                                                                                                                                                                              |           |                     | CK. BY<br>GJP           | DATE<br>12-5-05                   |
| PERFORMANCE SPECIFICATION                                                                                                                                                                                    |           |                     | HC-23772-000<br>SHT 2.1 | APP. BY<br>GJP<br>DATE<br>12-5-05 |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Knowles:](#)

[HC-23772-000](#)