


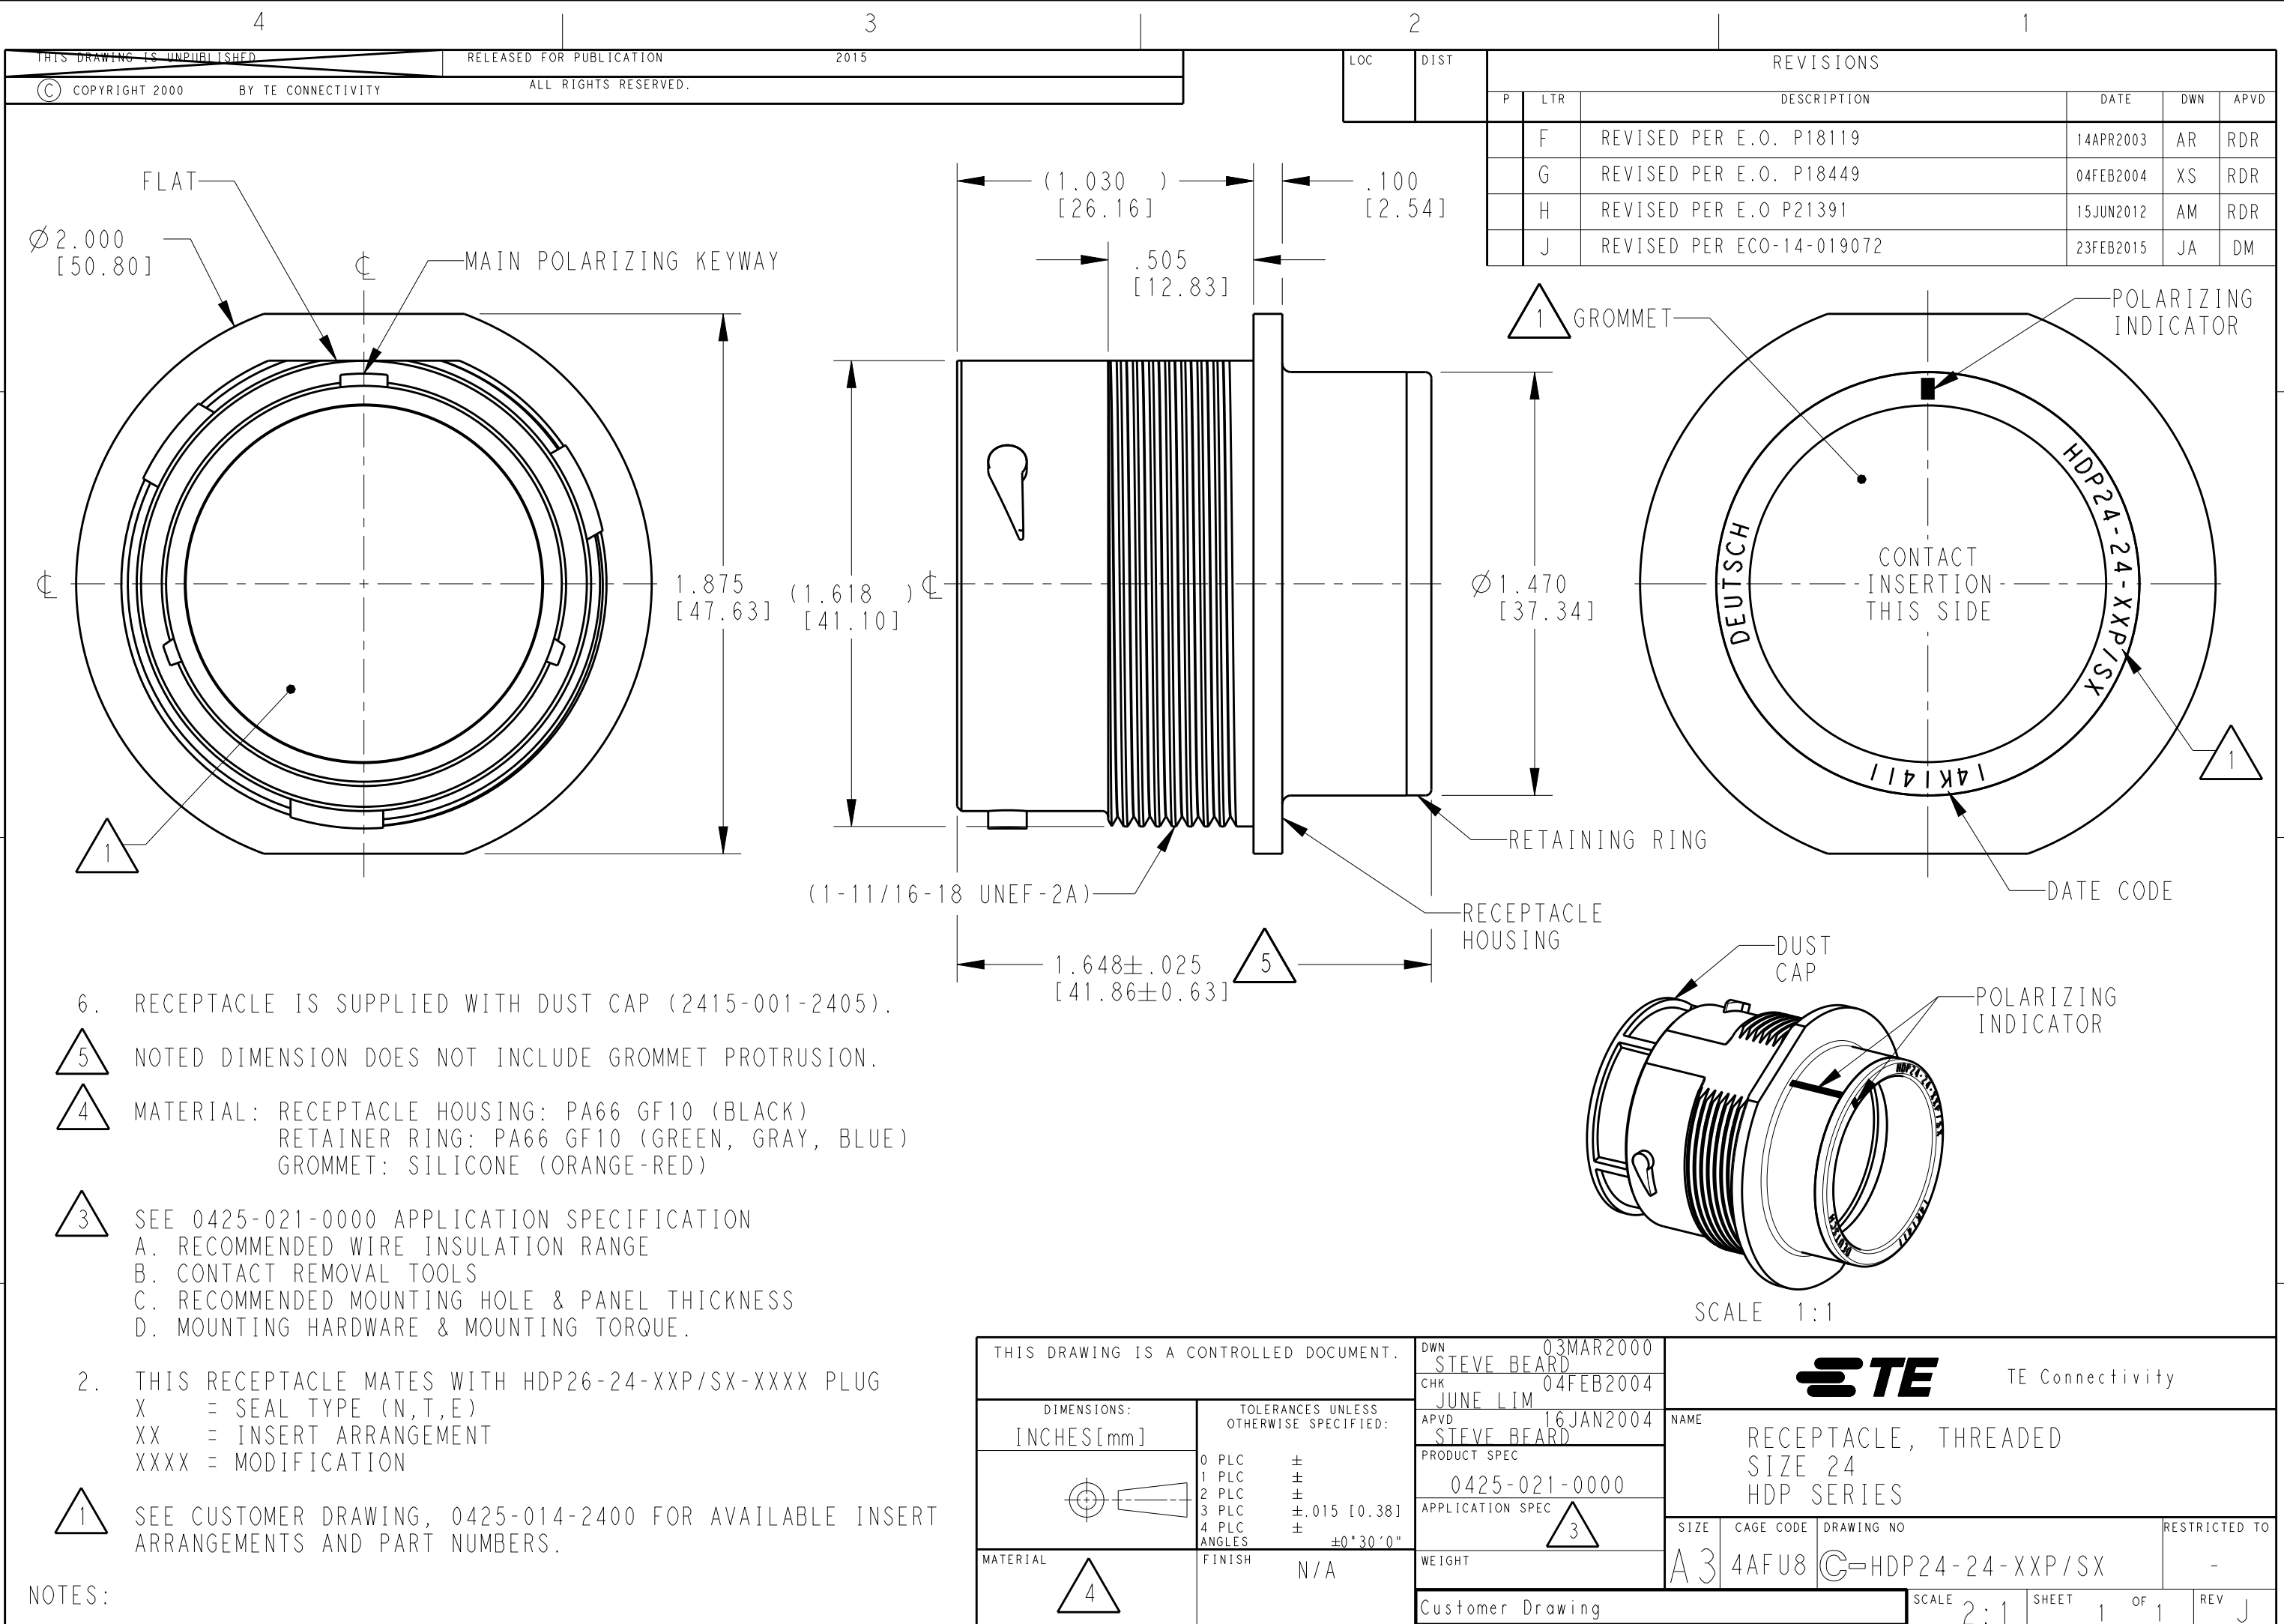

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
	F	REVISED PER E.O. P18119			14APR2003	AR	RDR	
	G	REVISED PER E.O. P18449			04FEB2004	XS	RDR	
	H	REVISED PER E.O P21391			15JUN2012	AM	RDR	
	J	REVISED PER ECO-14-019072			23FEB2015	JA	DM	

6. RECEPTACLE IS SUPPLIED WITH DUST CAP (2415-001-2405).
5. NOTED DIMENSION DOES NOT INCLUDE GROMMET PROTRUSION.
4. MATERIAL: RECEPTACLE HOUSING: PA66 GF10 (BLACK)
RETAINER RING: PA66 GF10 (GREEN, GRAY, BLUE)
GROMMET: SILICONE (ORANGE-RED)
3. SEE 0425-021-0000 APPLICATION SPECIFICATION
A. RECOMMENDED WIRE INSULATION RANGE
B. CONTACT REMOVAL TOOLS
C. RECOMMENDED MOUNTING HOLE & PANEL THICKNESS
D. MOUNTING HARDWARE & MOUNTING TORQUE.
2. THIS RECEPTACLE MATES WITH HDP26-24-XXP/SX-XXXX PLUG
X = SEAL TYPE (N,T,E)
XX = INSERT ARRANGEMENT
XXXX = MODIFICATION
1. SEE CUSTOMER DRAWING, 0425-014-2400 FOR AVAILABLE INSERT ARRANGEMENTS AND PART NUMBERS.

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03MAR2000	TE Connectivity	
		CHK	04FEB2004		
		APVD	16JAN2004	NAME RECEPTACLE, THREADED SIZE 24 HDP SERIES	
		PRODUCT SPEC	0425-021-0000		
		APPLICATION SPEC	3	SIZE A3	
		WEIGHT			
		Customer Drawing		CAGE CODE 4AFU8	
				DRAWING NO G-HDP24-24-XXP/SX	
				RESTRICTED TO -	
				SCALE 2:1	
				SHEET 1 OF 1	
				REV J	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HDP24-24-47SE](#)