


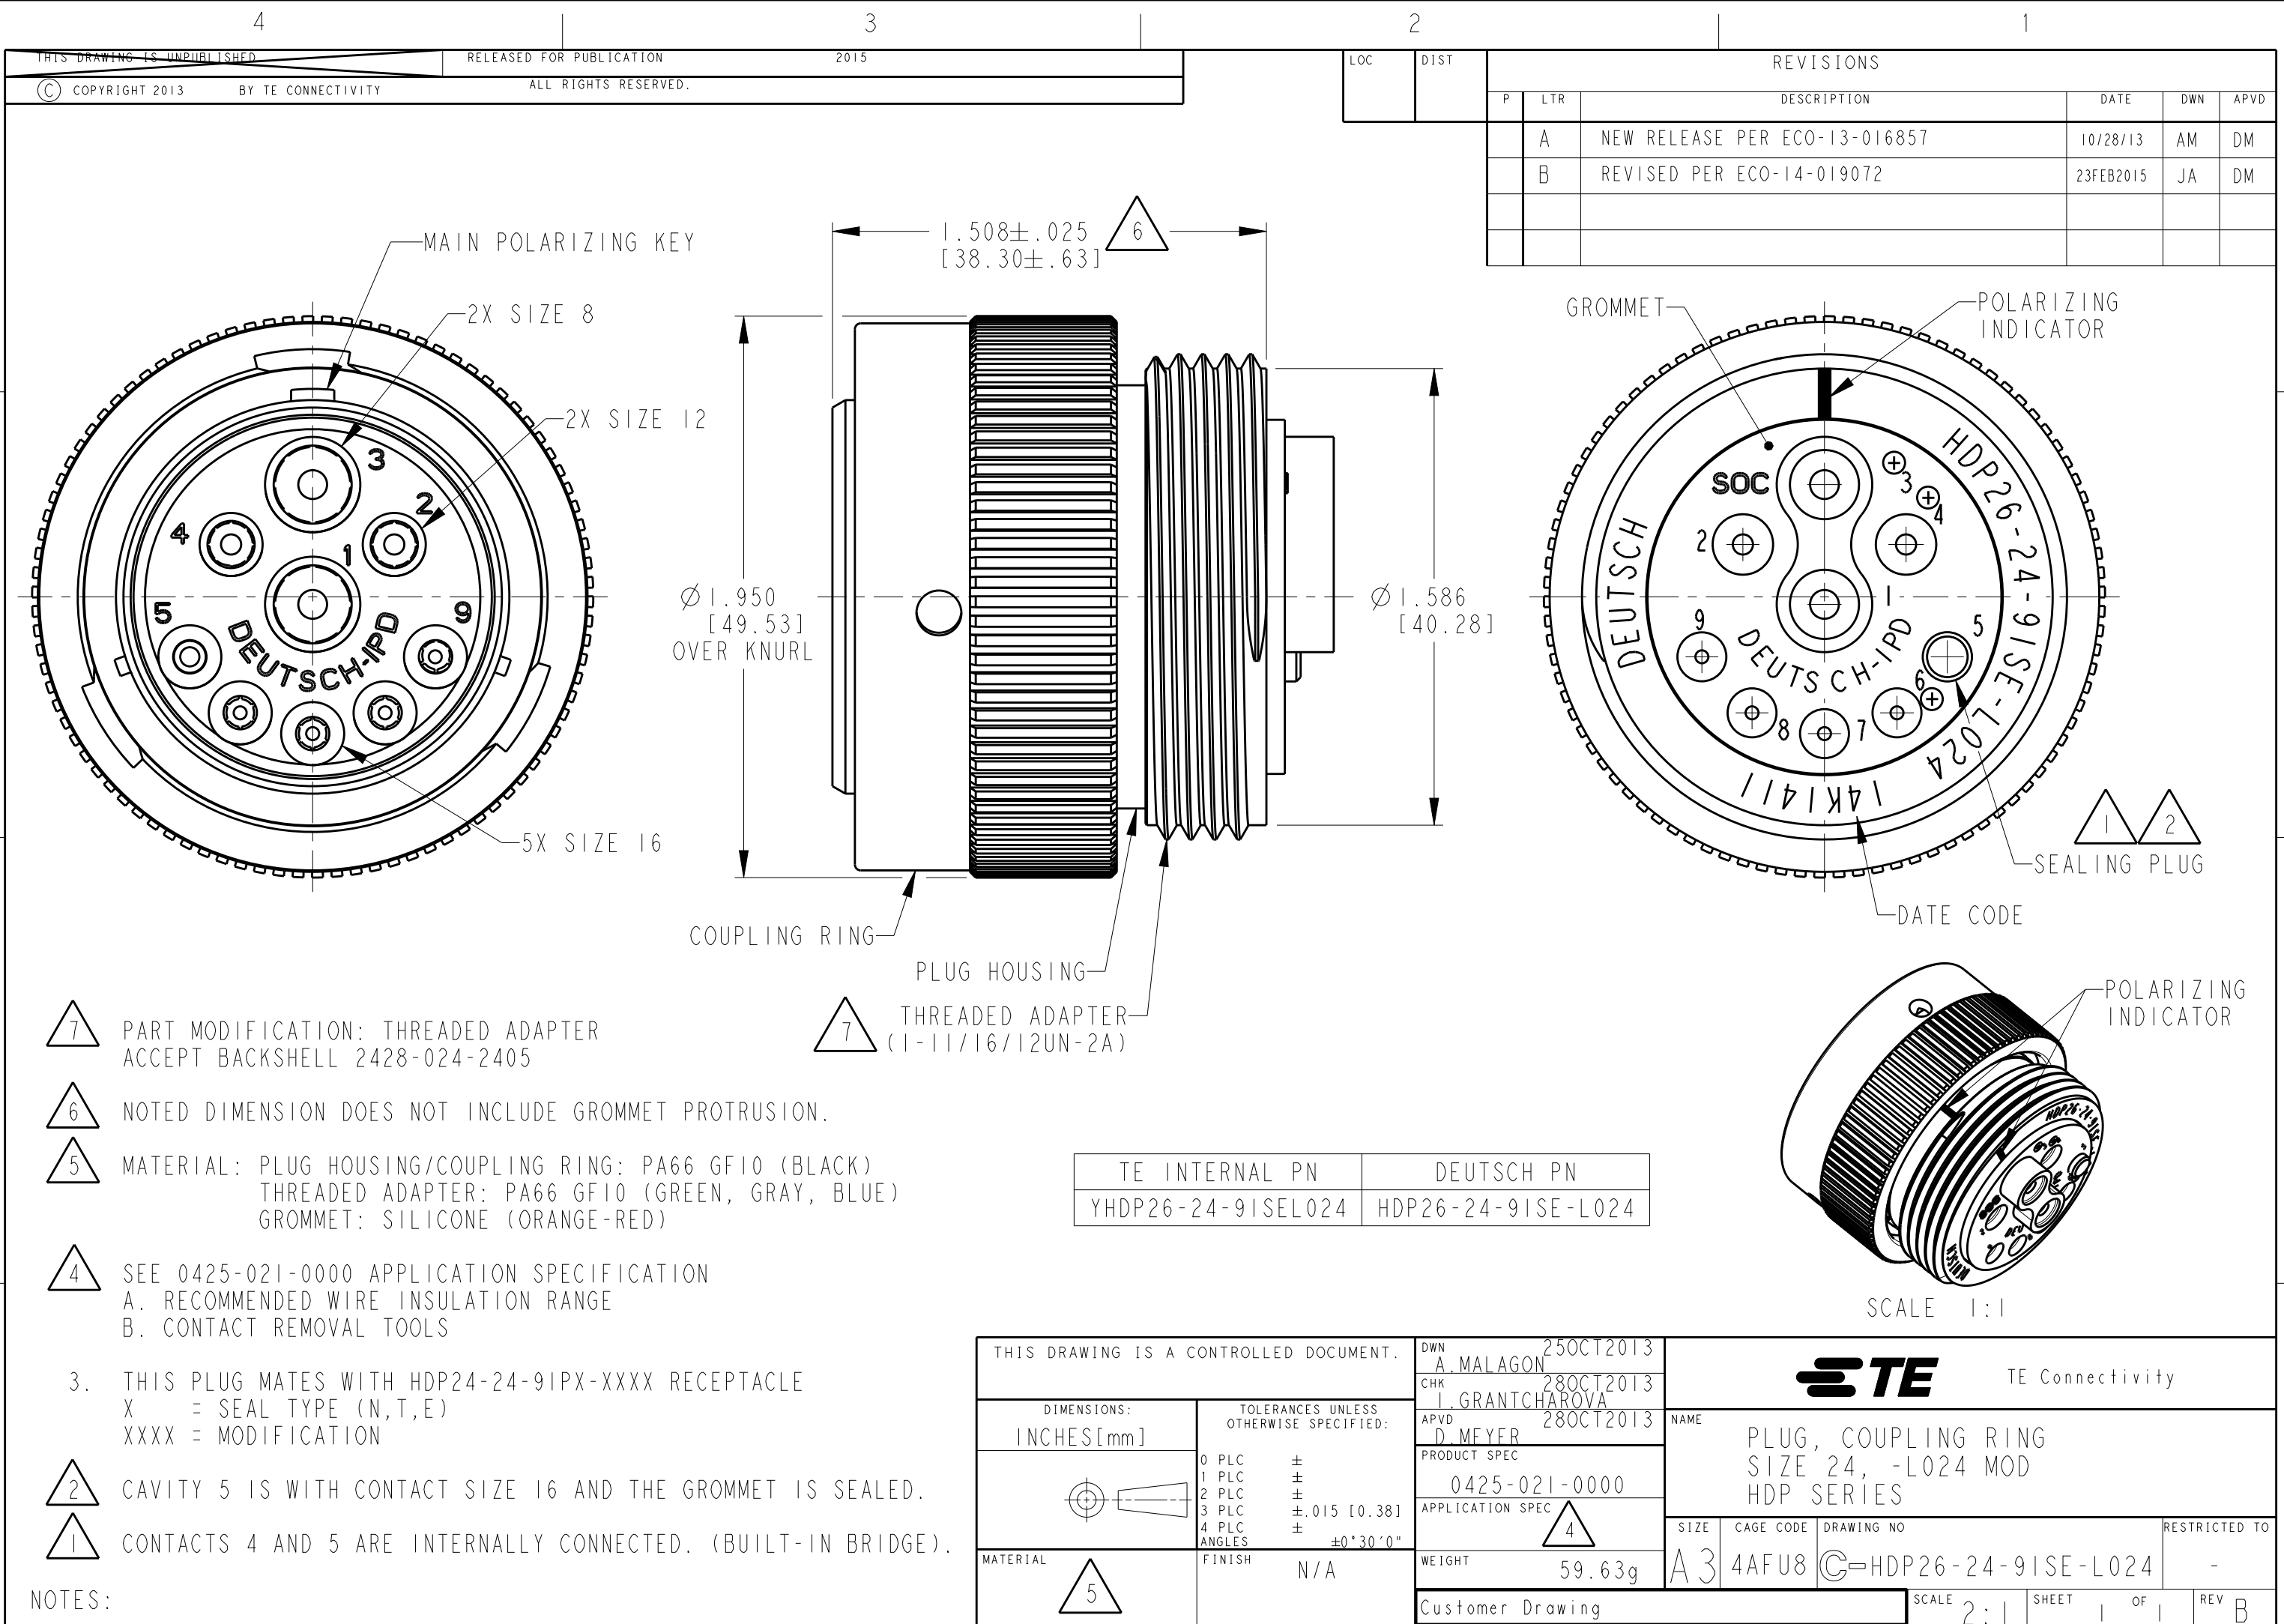

- 7 PART MODIFICATION: THREADED ADAPTER
ACCEPT BACKSHELL 2428-024-2405
- 6 NOTED DIMENSION DOES NOT INCLUDE GROMMET PROTRUSION.
- 5 MATERIAL: PLUG HOUSING/COUPLING RING: PA66 GF10 (BLACK)
THREADED ADAPTER: PA66 GF10 (GREEN, GRAY, BLUE)
GROMMET: SILICONE (ORANGE-RED)
- 4 SEE 0425-021-0000 APPLICATION SPECIFICATION
A. RECOMMENDED WIRE INSULATION RANGE
B. CONTACT REMOVAL TOOLS
3. THIS PLUG MATES WITH HDP24-24-9IPX-XXXX RECEPTACLE
X = SEAL TYPE (N,T,E)
XXXX = MODIFICATION
- 2 CAVITY 5 IS WITH CONTACT SIZE 16 AND THE GROMMET IS SEALED.
- 1 CONTACTS 4 AND 5 ARE INTERNALLY CONNECTED. (BUILT-IN BRIDGE).

NOTES:

TE INTERNAL PN	DEUTSCH PN
YHDP26-24-9ISEL024	HDP26-24-9ISE-L024

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. MALAGON 25OCT2013	TE Connectivity PLUG, COUPLING RING SIZE 24, -L024 MOD HDP SERIES		
DIMENSIONS: INCHES[mm]		CHK I. GRANTCHAROVA 28OCT2013			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. MEYER 28OCT2013			
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.015 [0.38] 4 PLC ± ANGLES ±0°30'0"		PRODUCT SPEC 0425-021-0000			
MATERIAL 5		FINISH N/A	APPLICATION SPEC 4	NAME	RESTRICTED TO
		WEIGHT 59.63g	SIZE A3	CAGE CODE 4AFU8	DRAWING NO C-HDP26-24-9ISE-L024
		Customer Drawing	SCALE 2:1	SHEET 1	OF 1
				REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[YHDP26-24-91SEL024](#) [HDP26-24-35PN-L015](#)