


HDS SERIES

2.3mm Half Pitch Type



DIP SWITCH

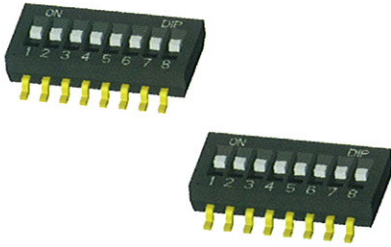

SPECIFICATION

MECHANICAL

Mechanical Life: 2000 operations cycles per switch.
Operation Force: 600gf max.
Stroke: 0.6mm

ENVIRONMENTAL

Operation Temperature Range: -20°C to +70°C
Storage Temperature Range: -40°C to +85°C


ELECTRICAL

Electrical Life: 2000 operations
Non-Switching Rating: 100mA, 50VDC.
Switching Rating: 25mA, 24VDC.




PACKAGE

Tube: 40 pcs/tube
Tape and Reel: 1000 pcs/reel


P.C.B. LAYOUT

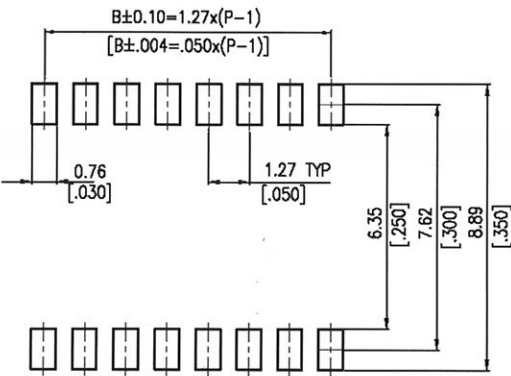

DIMENSIONS

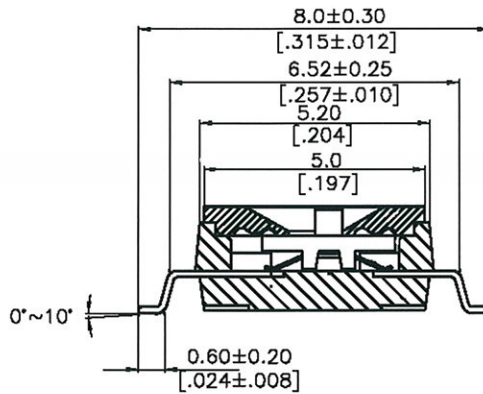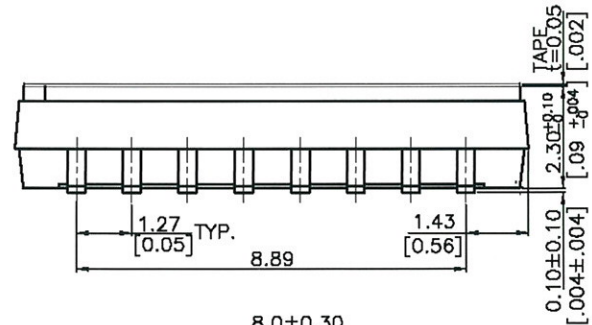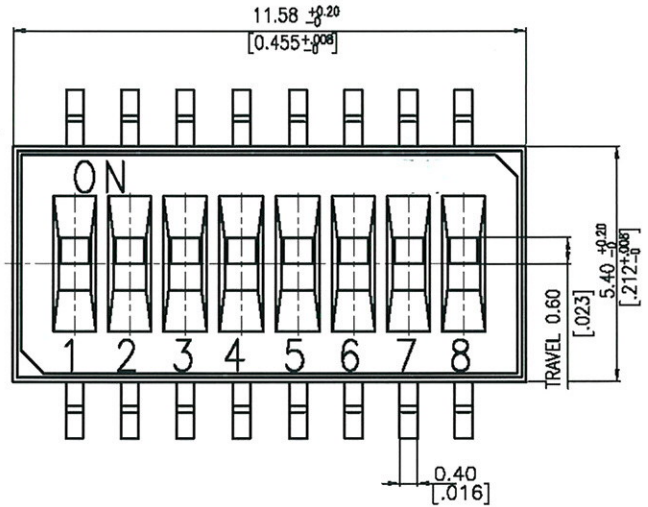

HOW TO ORDER

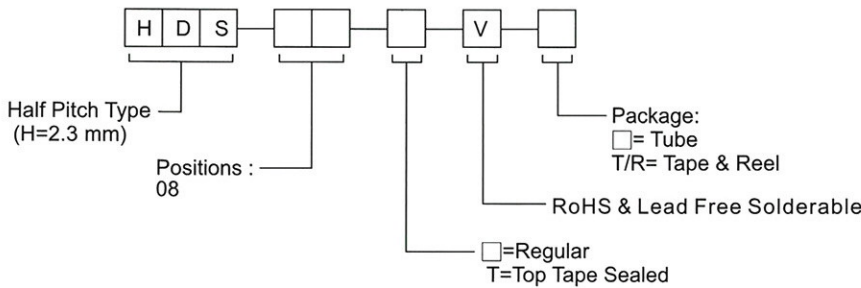

General Tolerance: ±0.2mm(±0.008")