

HER151G THRU HER158G

HIGH EFFICIENCY PLASTIC RECTIFIER

VOLTAGE: 50-1000V

CURRENT: 1.5A


FEATURES

- Low power loss, high efficiency
- Low leakage
- Low forward voltage
- High current capability
- High speed switching
- High surge capability
- High reliability

MECHANICAL DATA

- **Case:** Molded plastic
- **Epoxy:** UL94V-0 rate flame retardant
- **Lead:** MIL-STD- 202E, Method 208 guaranteed
- **Polarity:** Color band denotes cathode end
- **Mounting position:** Any
- **Weight:** 0.38 grams

DO-15

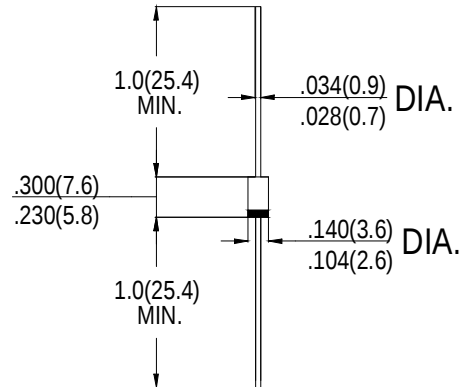

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	SYMBOL	HER 151G	HER 152G	HER 153G	HER 154G	HER 155G	HER 156G	HER 157G	HER 158G	units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	600	800	1000	V
Maximum Average Forward rectified Current at T _A =50°C	I _o	1.5								A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method)	I _{FSM}	50								A
Maximum Instantaneous forward Voltage at 1.5A DC	V _F	1.0			1.3		1.7			V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _A =25°C	I _R	5.0								µA
Maximum Full Load Reverse Current Full Cycle Average,.375”(9.5mm) lead length at T _L =55°C		100								
Maximum Reverse Recovery Time (Note 1)	t _{rr}	50					75			nS
Typical Junction Capacitance (Note 2)	C _J	30					20			pF

Notes: 1. Test Conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$

2. Measured at 1MHz and applied reverse voltage of 4.0 volts