



CHENMKO ENTERPRISE CO.,LTD

Lead free devices

**GLASS PASSIVATED
HIGH EFFICIENCY RECTIFIER**

VOLTAGE RANGE 50 - 1000 Volts CURRENT 6.0 Amperes

**HER601GPT
THRU
HER608GPT**

FEATURES

- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Low power loss, high efficiency
- * Low leakage
- * High current capability
- * High speed switching
- * High current surge
- * High reliability
- * Glass passivated junction
- * High temperature soldering guaranteed : 260°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-201AD molded plastic

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Indicated by cathode band

Weight: 1.20 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.



DO-201AD

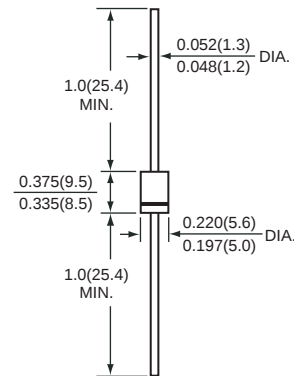

Dimensions in inches and (millimeters)

DO-201AD

MAXIMUM RATINGS (At Ta = 25°C unless otherwise noted)

RATINGS	SYMBOL	HER601GPT	HER602GPT	HER603GPT	HER604GPT	HER605GPT	HER606GPT	HER607GPT	HER608GPT	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage	VRMS	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage	VDC	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at TA = 50°C	IO	6.0								Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	250								Amps
Typical Junction Capacitance (Note 1)	CJ	100					65			pF
Operating and Storage Temperature Range	TJ, TSTG	-65 to +175								°C

ELECTRICAL CHARACTERISTICS (At Ta = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	HER601GPT	HER602GPT	HER603GPT	HER604GPT	HER605GPT	HER606GPT	HER607GPT	HER608GPT	UNITS
Maximum Instantaneous Forward Voltage at 6.0 A DC	V _F	1.0			1.3		1.70			Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage at T _A = 25°C	I _R	10								uAmps
Maximum Full Load Reverse Current Average, Full Cycle 0.375" (9.5mm) lead length at T _L = 55°C		150								uAmps
Maximum Reverse Recovery Time (Note 2)	trr	50					70			nSec

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts
2. Test Conditions : IF = 0.5 A, IR = -1.0 A, IRR = -0.25 A

2001-6

RATING CHARACTERISTIC CURVES (HER601GPT THRU HER608GPT)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

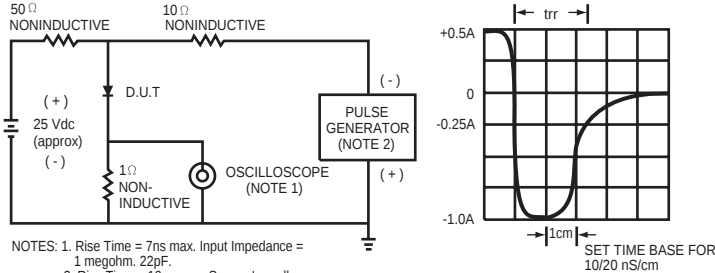


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

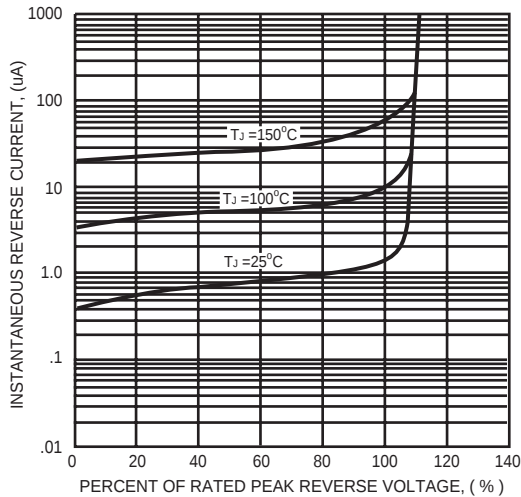


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

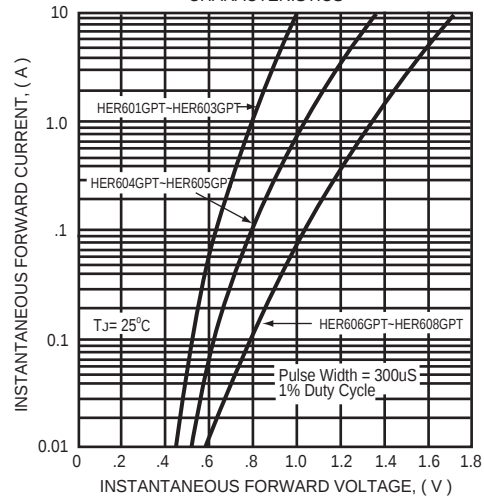


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

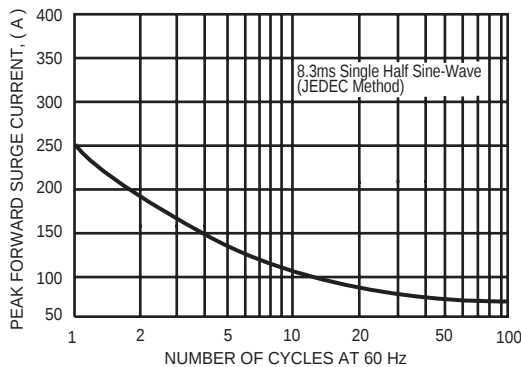


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

