






HI1206T161R-10

PHYSICAL DIMENSIONS:

A	3.20	[.126]	+ 0.20	[.008]
B	1.60	[.063]	+ 0.20	[.008]
C	1.35	[.053]	+ 0.20	[.008]
D	0.51	[.020]	+ 0.25	[.010]

Z vs FREQUENCY
IMPEDANCE UNDER DC BIAS

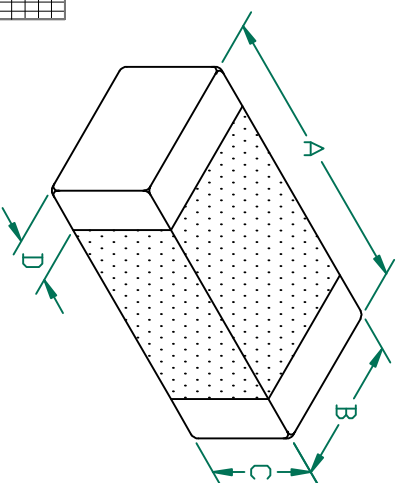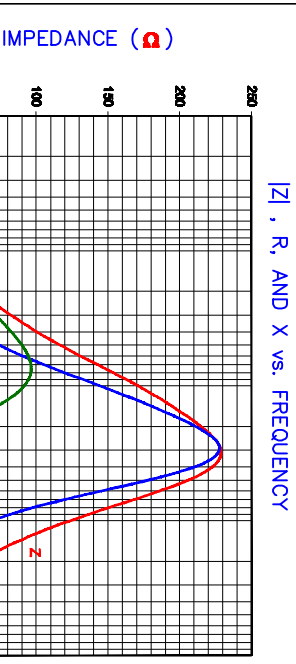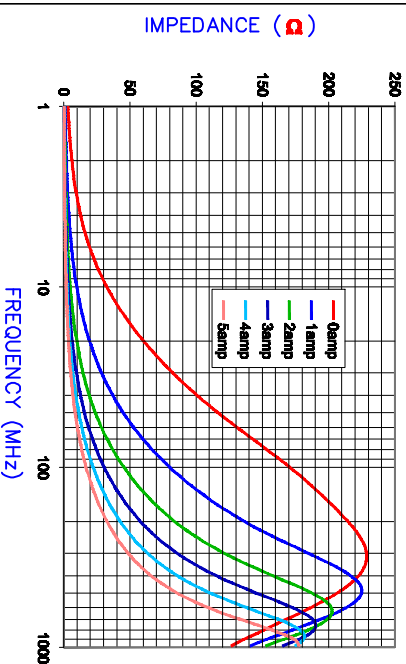


ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	
Nominal	160		
Minimum	120		
Maximum	208	0.018	6000 mA


- NOTES: UNLESS OTHERWISE SPECIFIED
1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 3000 PCS/REEL.
 2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
 3. TERMINATION FINISH IS 100% TIN.

OBSOLETE

LAND PATTERNS FOR REFLOW SOLDERING

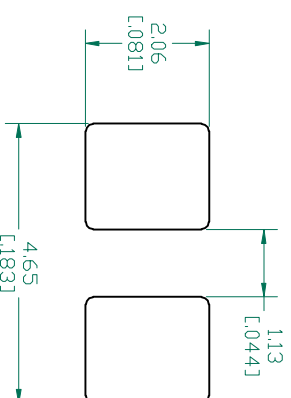

RECOMMENDED SOLDERING CONDITIONS

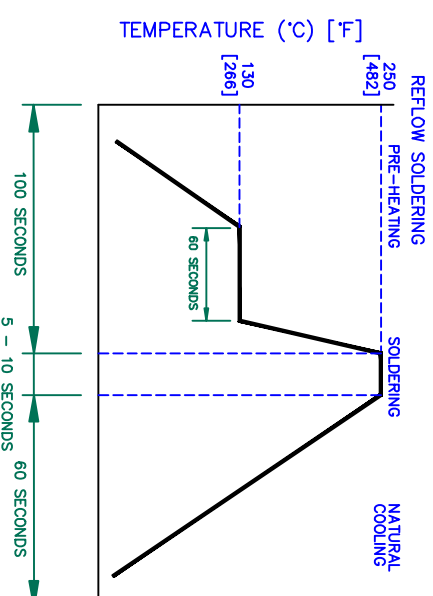

(For wave soldering, add 0.762 [0.030] to this dimension)

DIMENSIONS ARE IN mm [INCHES]

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.

Steward

DIMENSIONS ARE IN mm [INCHES].			