


HI2220P251R-10

UNCONTROLLED
DOCUMENT

PHYSICAL DIMENSIONS:

A	5.59 [.220]	$\pm$ 0.51 [.020]
B	5.08 [.200]	$\pm$ 0.25 [.010]
C	1.80 [.071]	$\pm$ 0.25 [.010]
D	0.76 [.030]	$\pm$ 0.25 [.010]


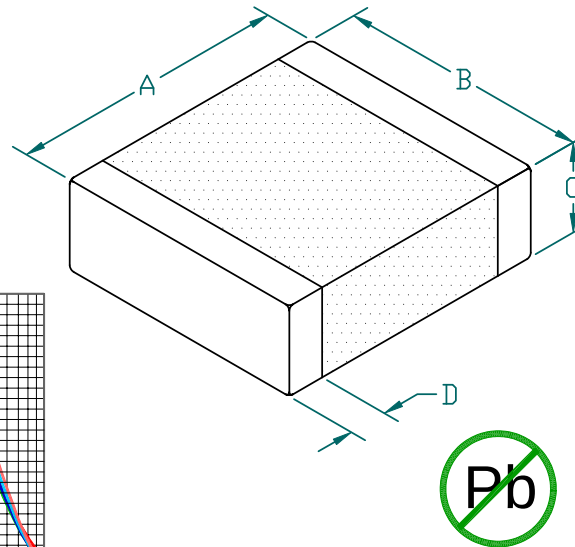


ELECTRICAL CHARACTERISTICS:


Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	250	
Minimum	188	
Maximum	313	0.015

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 2,000 PCS/REEL.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

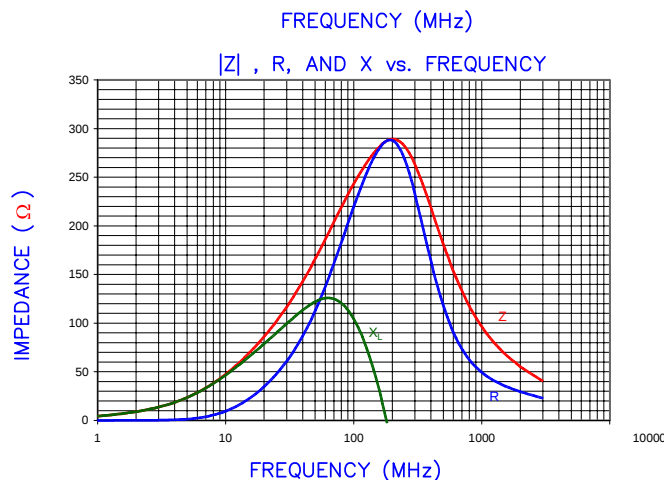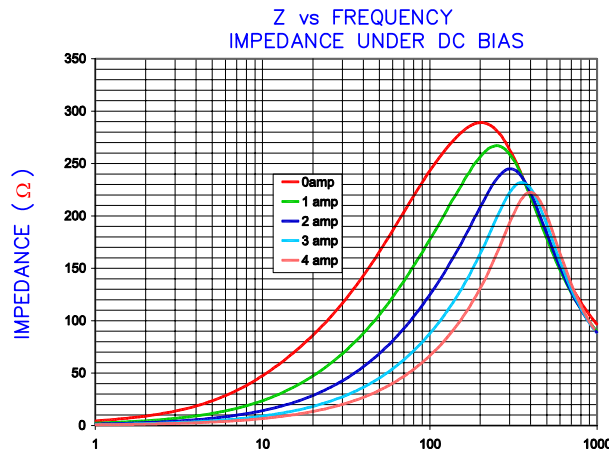


LAND PATTERNS FOR REFLOW SOLDERING

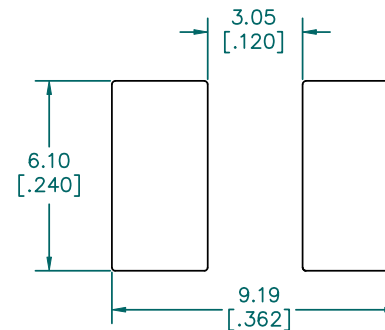

(For wave soldering, add 0.762 (0.030) to this dimension.)

RECOMMENDED SOLDERING CONDITIONS

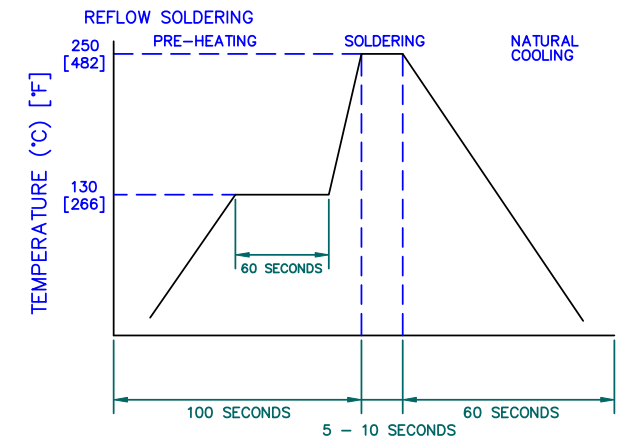

DIMENSIONS ARE IN mm [INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
				Steward			
				PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
				HI2220P251R-10	A	CO-FIRE	TMB
				DATE:	04/03/04	SCALE:	NTS
				CAD #	HI2220P251R-10-A	TOOL #	-
REV	A	ORIGINAL DRAFT	04/03/04	TMB	INT		
							2 of 2