Panel-Mount—Indicating Fuseholder
For ¼″ × 1¼″ Fuses

Catalog Symbol: HKL, HKR, HKT, HKU, and HKX
Panel-Mount—Indicating
Ampere Rating: 15 and 20A
Temperature Rating (RTI): 130°C
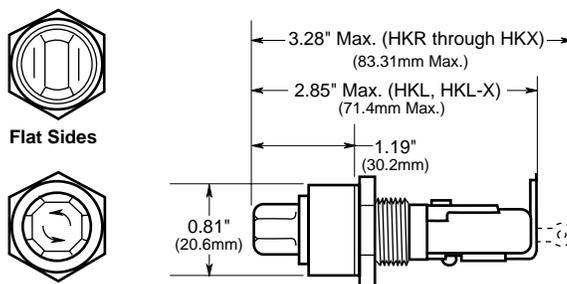**Agency Information:**
*UL Recognized, Guide IZLT2, File E14853
*CSA Certified, Class 6225-01, File 47235

Electrical Ratings

Catalog Symbol	Amps	Lamp		Knob Color	Knob Type
		Volts AC	Type		
HKL *	15	90-250	Neon	Clear	Octagon
HKL-X *	15	90-250	Neon	Clear	Flat Sided
HKR	20	22-30	Incandescent	Amber	Octagon
HKT	20	13-22	Incandescent	Amber	Octagon
HKU	20	4-6	Incandescent	Red	Octagon
HKX	20	22-33	Incandescent	Amber	Flat Sided

C€ CE logo denotes compliance with European Union Low Voltage Directive (50-1000Vac, 75-1500Vdc). Refer to Data Sheet: 8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

Dimensional Data

Flat Sides

Octagonal Sides

3.28" Max. (HKR through HKX)
(83.31mm Max.)

2.85" Max. (HKL, HKL-X)
(71.4mm Max.)

1.19"
(30.2mm)

0.81"
(20.6mm)

Punched Mounting Hole

.630" ± .005"
(16.0mm ± .13mm)

.573" ± .003"
(14.6mm ± .08mm)

General Information:

- For panels up to ³⁄₁₆″ (4.8mm) thick.
- Vibration resistant.
- For ¼″ × 1¼″ fuses.
- Light comes on when fuse opens.
- Steel nut – 9351.
- Neoprene washer – 6276.
- Line connection is the back terminal.
- Do not put tension on line (rear) terminal.

COOPER Bussmann

6-3-04   SB04184

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cooper Bussmann](#):

[HKL-JWX](#) [HKL-JWX-AABB](#) [HKL-JWXAABB470K](#) [HKL-WX](#) [HKL-X-BB](#) [HKQ-R](#) [HKX-E](#) [HKX-JW-AABB](#) [HKX-V](#) [HKX-W](#) [BK-HKL](#) [BK-HKL-W](#) [BK-HKL-EX](#) [BK/HKL](#) [BK/HKL-EX](#) [BK/HKL-W](#)

[Eaton](#):

[HKL-W](#) [BK/HKX](#) [BK/HKT](#) [HKL](#) [BK/HKR](#) [BK/HKU](#) [BK/HKL-X](#)