


Encapsulated Low Power Inductors

Model HM15

Features and Benefits

- Insulation Resistance, Minimum 100 MΩ
- Operating Temperature Range -40°C to +105°C
- Temperature Rise, Maximum 40°C
- RoHS Compliant

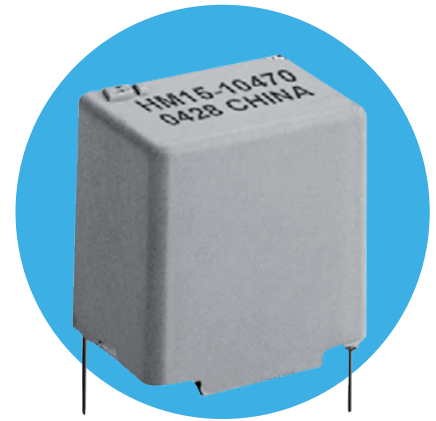

Specifications @ 25°C / Packaging

Part Number	Inductance Typical μH	Current @ 40°C Rise Amps DC Max.	DC Resistance Ω Max.	E _{Top} V- μSec	Figure	Carton Box Quantity (Units)
HM15-10150LF	150	1.70	0.36	80	1	462
HM15-10220LF	220	1.50	0.38	90	1	462
HM15-10330LF	330	1.00	0.74	100	1	462
HM15-10470LF	470	0.90	1.18	120	1	462
HM15-10680LF	680	0.85	1.25	175	1	462
HM15-10820LF	820	0.75	2.30	175	1	462
HM15-11000LF	1,000	0.50	2.40	175	1	462
HM15-20150LF	150	1.70	0.36	80	2	810
HM15-20220LF	220	1.50	0.38	90	2	810
HM15-20330LF	330	1.00	0.74	100	2	810
HM15-20470LF	470	0.90	1.18	120	2	810
HM15-20680LF	680	0.85	1.25	175	2	810
HM15-20820LF	820	0.75	2.30	175	2	810
HM15-21000LF	1,000	0.50	2.40	175	2	810

Schematic (Figure 1 & 2)

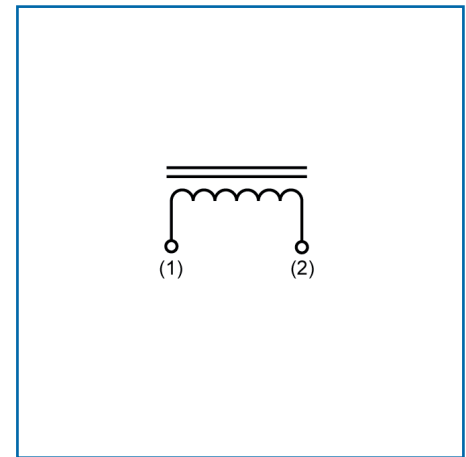


Figure 1 (Inch / mm)


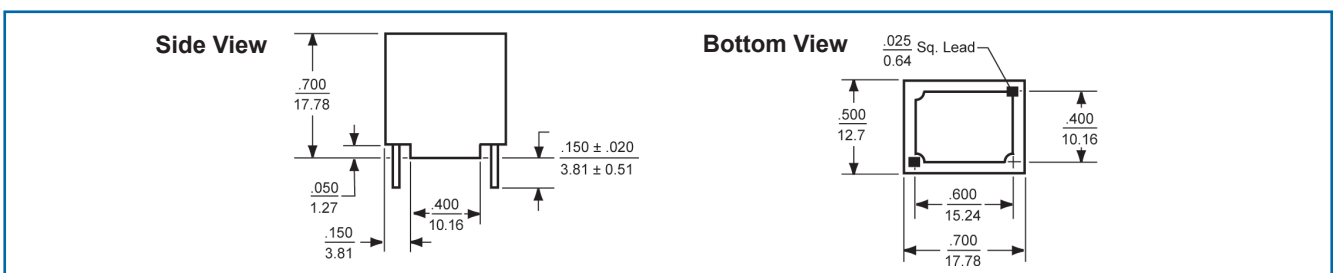


Figure 2 (Inch / mm)

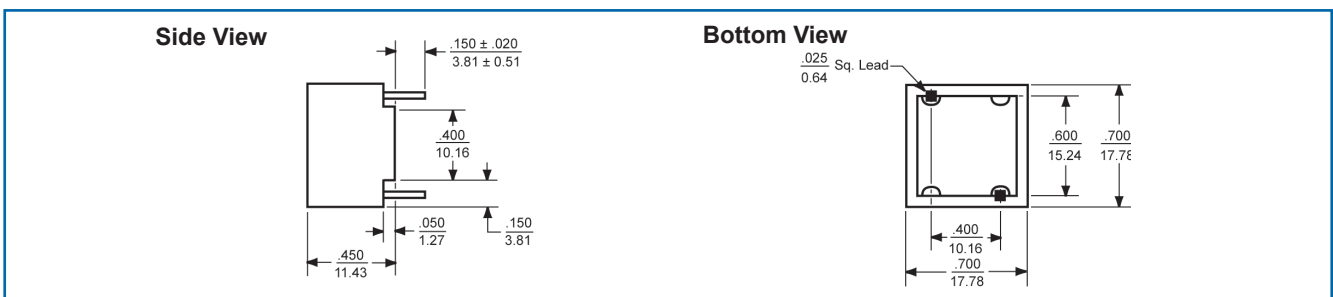

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TT Electronics:](#)

[HM15-10470LF](#)