



# Coax Probes ATTACHED CABLE


## 100445 & 100746 SIGNAL PLUNGERS

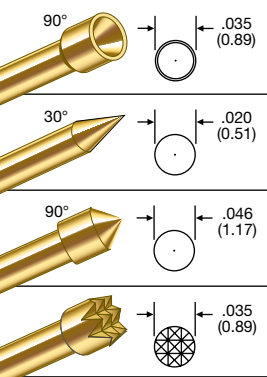


## 100445 & 100746 SHIELDING PLUNGERS



## 100999 PLUNGERS TIPS



## 100445/100746

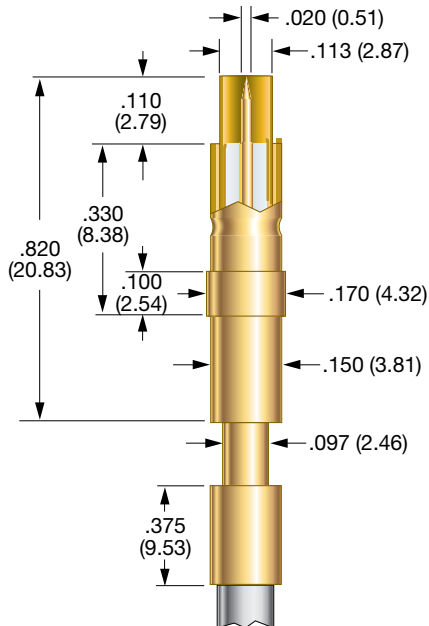

### PROBE SPECIFICATIONS

**Minimum Centers:** .200 (5.08)  
**Current Rating:** 3 amps continuous  
**Spring Force:** Signal Conductor:  
 B Tip: 1.6 oz. @ .070 (1.78) travel  
 A, ES, H Tips: 2.0 oz. @ .070 (1.78) travel  
 Shielding Plunger: 4.3 oz. @ .070 (1.78) travel  
**Nominal Impedance:** 50 Ω  
**Maximum Travel:**  
 .090 (2.29) for tip B  
 .075 (1.91) for tips A, ES, H  
**Working Travel:** .070 (1.78)


### MATERIALS

**Barrel:** Brass, gold plated  
**Spring:**  
 Signal Conductor: Beryllium copper, gold plated  
 Shielding Plunger: Stainless steel, gold plated  
**Shielding Plunger:** Beryllium copper, gold plated  
**Dielectric Insulator:** Teflon  
**Shielding Tube:** Stainless steel, gold plated  
**Signal Conductor:** Series S, Size 00 probe  
**Crimp Ferrule:** Brass, gold plated  
**Coaxial Cable:** 100445: RG 174U  
 100746: RG 316

### HOW TO ORDER

| 100445           | B                | F               | N                 | 12           | AM                                                                                       |
|------------------|------------------|-----------------|-------------------|--------------|------------------------------------------------------------------------------------------|
| BASE PART NUMBER | SIGNAL PROBE TIP | MOUNTING FLANGE | SHIELDING PLUNGER | CABLE LENGTH | CABLE TERMINATION                                                                        |
|                  |                  |                 |                   |              | N: WITHOUT FLANGE<br>F: WITH FLANGE                                                      |
|                  |                  |                 |                   |              | AM: SMA MALE<br>AF: SMA FEMALE<br>NC: NO CONNECTOR                                       |
|                  |                  |                 |                   |              | SHIELDING PLUNGER: CABLE LENGTH:<br>S: SERRATED 12 - 12 INCHES<br>N: FLAT 36 - 36 INCHES |

## 100999

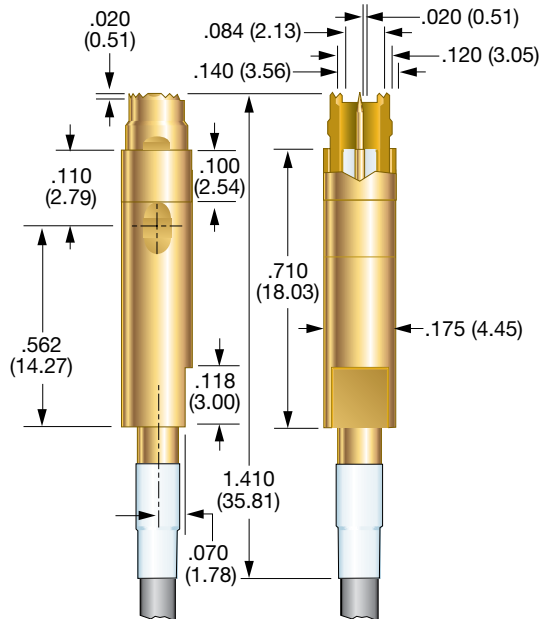

### PROBE SPECIFICATIONS

**Minimum Centers:** .200 (5.08)  
**Current Rating:** 3 amps continuous  
**Spring Force:** Signal Conductor:  
 B Tip: 1.6 oz. @ .070 (1.78) travel  
 U Tip: 3.3 oz. @ .070 (1.78) travel  
 Shielding Plunger: 4.5 oz. @ .070 (1.78) travel  
**Nominal Impedance:** 50 Ω  
**Maximum Travel:** .090 (2.29)  
**Working Travel:** .070 (1.78)

### MATERIALS

**Barrel:** Brass, gold plated  
**Spring:**  
 Signal Conductor: Beryllium copper, gold plated  
 Shielding Plunger: Stainless steel, gold plated  
**Shielding Plunger:** Beryllium copper, gold plated  
**Dielectric Insulator:** Teflon  
**Shielding Tube:** Brass, gold plated  
**Signal Conductor:** Series S, Size 00 probe  
**Coaxial Cable:** Semi-flex or flex cable

### HOW TO ORDER

| 100999           | B                | 12           | AM          | F          |
|------------------|------------------|--------------|-------------|------------|
| BASE PART NUMBER | SIGNAL PROBE TIP | CABLE LENGTH | TERMINATION | CABLE TYPE |
|                  |                  |              |             |            |
|                  |                  |              |             |            |
|                  |                  |              |             |            |

\* WHEN ORDERING WITH A PREATTACHED CONNECTOR, PLEASE NOTE THAT THE CONNECTOR WILL NOT FIT THROUGH THE PROBE MOUNTING HOLE. THE PROBE MUST BE INSERTED FROM THE BOTTOM SIDE OF THE MOUNTING PLATE.

CONSULT IDI FOR MORE INFORMATION.

Specifications subject to change without notice. Dimensions in inches (millimeters)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IDI:](#)

[R-100-WW-1044](#) [R-075-WW-694](#) [ICT-50J-B-7-GS](#) [S-50C-T-5.4-G-S](#) [R-075-RP](#) [S-100-UST-6.7-G-S](#) [100526-H-10-AM](#) [100803-00](#) [100445-H-F-N-24-AM](#) [S-100-VLT-8-G-S](#) [S-100-R-8-G-S](#) [S-100-W-6.7-G-S](#) [S-100-VLT-6.7-G-S](#) [S-100-UST-8-G-S](#) [S-100-R-3.5-G-S](#) [S-50C-J-5.4-DG](#) [SW-5-F-4.0-115-](#) [R-075-WW-1044](#) [S-00-G-1.3-G-DS-36-1](#) [100910-ES-S](#) [S-075-H-7.0-G](#) [S-00-J-1.3-G-DS-36-1](#) [S-100-TX-5.5-G](#) [S-100-TX-8-G](#) [S-100-LM-3.5-G](#) [S-075-J-7-G-S](#) [S-0-T6-2.2-D S/C](#) [S-0-T6-2.2-G S/C](#) [S-0-T6-2.5-D S/C](#) [S-0-T6-2.5-G S/C](#) [S-0-T6-3.7-D S/C](#) [S-0-T6-3.7-G S/C](#) [S-2-D-4-E/N D/C](#) [SGR-2-B-3.7-G-880 S/C](#) [SGR-2-B-4-G S/C](#) [SS-40-C-1.8-G D/C](#) [SS-40-C-2.4-G D/C](#) [SS-50-G-2.9-G S/C](#) [SS-50-G-3.3-D S/C](#) [SS-50-G-3.3-G S/C](#) [SS-50-G-5.1-D S/C](#) [SS-50-G-5.1-G S/C](#) [SSX-50-A-2.9-D D/C](#) [SSX-50-A-2.9-G D/C](#) [SSX-50-A-3.3-D D/C](#) [SSX-50-A-3.3-G D/C](#) [SSX-50-A-5.1-G D/C](#) [SSX-50-B-2.9-D D/C](#) [SSX-50-B-2.9-G D/C](#) [SSX-50-B-3.3-D D/C](#) [SSX-50-B-3.3-G D/C](#) [SSX-50-B-5.1-D D/C](#) [SSX-50-B-5.1-G D/C](#) [SSX-50-B9-2.9-D D/C](#) [SSX-50-B9-2.9-G D/C](#) [SSX-50-B9-3.3-D D/C](#) [SSX-50-B9-5.1-D D/C](#) [SSX-50-B9-5.1-G D/C](#) [SSX-50-C-2.9-D D/C](#) [SSX-50-C-2.9-G D/C](#) [SSX-50-C-3.3-D D/C](#) [SSX-50-C-3.3-G D/C](#) [SSX-50-C-5.1-G D/C](#) [SSX-50-D-2.9-D D/C](#) [SSX-50-D-2.9-G D/C](#) [SSX-50-E-3.3-G D/C](#) [SSX-50-ES-3.3-G D/C](#) [SSX-50-ES-5.1-G D/C](#) [SSX-50-G-2.9-G D/C](#) [SSX-50-H-2.9-G D/C](#) [SSX-50-H-3.3-D D/C](#) [SSX-50-H-3.3-G D/C](#) [SSX-50-H-5.1-G D/C](#) [SSX-50-J-2.9-G D/C](#) [SSX-50-J-3.3-D D/C](#) [SSX-50-J-3.3-G D/C](#) [SSX-50-J-5.1-D D/C](#) [SSX-50-J-5.1-G D/C](#) [SSX-50-JS-2.9-G D/C](#) [SSX-50-T4-2.9-D D/C](#) [SSX-50-T4-5.1-D D/C](#) [SSX-50-T4-5.1-G D/C](#) [SSX-50-T6-2.9-G D/C](#) [SSX-50-T6-3.3-D D/C](#) [SSX-50-T6-3.3-G D/C](#) [SSX-50-T6-5.1-G D/C](#) [SSX-50-U-2.9-D D/C](#) [SSX-50-U-2.9-G D/C](#) [SSX-50-U-3.3-D D/C](#) [SSX-50-U-3.3-G D/C](#) [SSX-50-U-5.1-D D/C](#) [SSX-50-U-5.1-G D/C](#) [SSX-50-UT-2.9-G D/C](#) [SSX-50-UT-3.3-D D/C](#) [SSX-50-UT-3.3-G D/C](#) [SSX-50-UT-5.1-G D/C](#) [SSX-50-V-2.9-D D/C](#) [SSX-50-V-2.9-G D/C](#) [SSX-50-V-3.3-G D/C](#) [SX-0-A-2.2-D D/C](#)