

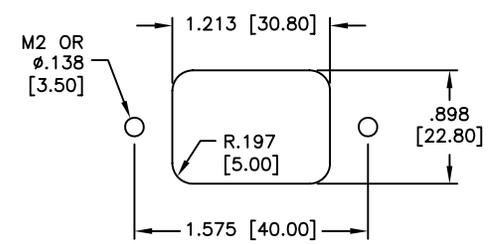
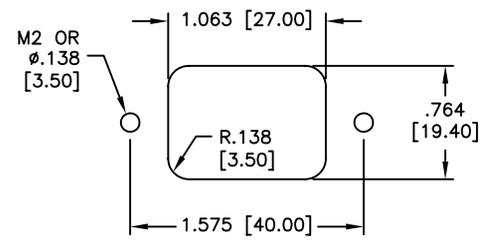
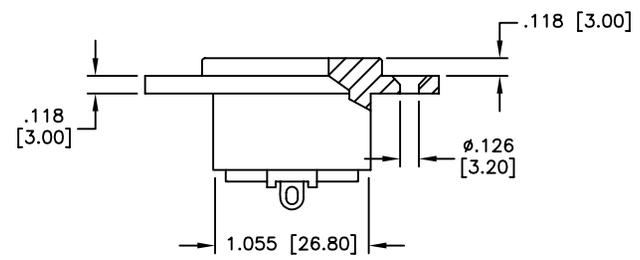
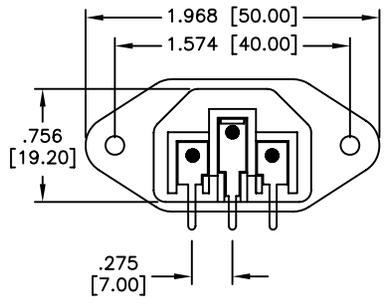
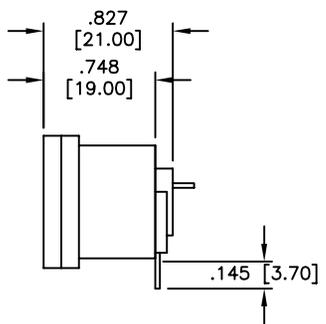


6	5	4	3	2	1
APPROVED: _____			Rev	AWO #	Description
DATE: _____			-		RELEASED
TITLE: _____					Date
					7/10/07
					Appr

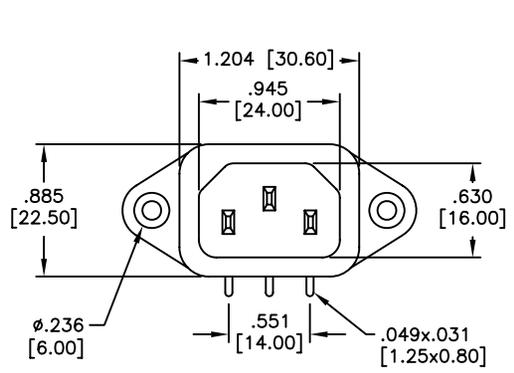

REAR MOUNTING

FRONT MOUNTING

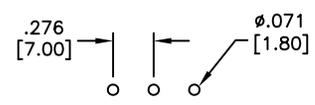

RECOMMENDED PCB LAYOUT

**SPECIFICATIONS:**  
 Material:  
 Insulator: Nylon 66, glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Plating:  
 Nickel over Copper underplate overall  
 PCB pins: Tin over Copper underplate  
 Electrical:  
 Operating voltage: 250 VAC  
 Current rating: UL & CSA: 15 Amps max  
 VDE: 10 Amps max  
 Insulation resistance: 100 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 2,000 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -25°C to +70°C  
 Environmental:  
 Lead free, RoHS compliant  
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	
DRAWN	DATE
SS	7/10/07
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IEC MALE INLET, FLANGED PANEL MOUNT RIGHT ANGLE, PCB TAILS

SIZE	PART NO.	REV.
X	IEC-A-4	-

REF: \_\_\_\_\_ SCALE: NTS SHEET 1 OF 1