Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 1560798

International
IOR Rectifier

PD-91709A

IRF7343

HEXFET® Power MOSFET

- Generation V Technology
- Ultra Low On-Resistance
- Dual N and P Channel MOSFET
- Surface Mount
- Fully Avalanche Rated



Top View

	N-Ch	P-Ch
V_{DSS}	55V	-55V
$R_{DS(on)}$	0.050Ω	0.105Ω


SO-8

Description

Fifth Generation HEXFETs from International Rectifier utilize advanced processing techniques to achieve extremely low on-resistance per silicon area. This benefit, combined with the fast switching speed and ruggedized device design that HEXFET Power MOSFETs are well known for, provides the designer with an extremely efficient and reliable device for use in a wide variety of applications.

The SO-8 has been modified through a customized leadframe for enhanced thermal characteristics and multiple-die capability making it ideal in a variety of power applications. With these improvements, multiple devices can be used in an application with dramatically reduced board space. The package is designed for vapor phase, infra red, or wave soldering techniques.

Absolute Maximum Ratings

	Parameter	Max.		Units
		N-Channel	P-Channel	
V_{DS}	Drain-Source Voltage	55	-55	V
I_D @ T_A = 25°C	Continuous Drain Current, V_{GS} @ 10V	4.7	-3.4	A
I_D @ T_A = 70°C	Continuous Drain Current, V_{GS} @ 10V	3.8	-2.7	
I_{DM}	Pulsed Drain Current ①	38	-27	
P_D @T_A = 25°C	Maximum Power Dissipation ⑤	2.0		W
P_D @T_A = 70°C	Maximum Power Dissipation ⑤	1.3		W
E_{AS}	Single Pulse Avalanche Energy③	72	114	mJ
I_{AR}	Avalanche Current	4.7	-3.4	A
E_{AR}	Repetitive Avalanche Energy	0.20		mJ
V_{GS}	Gate-to-Source Voltage	± 20		V
dv/dt	Peak Diode Recovery dv/dt ②	5.0	-5.0	V/ns
T_J, T_{STG}	Junction and Storage Temperature Range	-55 to + 150		°C

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JA}$	Maximum Junction-to-Ambient ⑤	–––	62.5	°C/W

4/11/05

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)

	Parameter		Min.	Typ.	Max.	Units	Conditions
$V_{(BR)DSS}$	Drain-to-Source Breakdown Voltage	N-Ch	55	—	—	V	V_{GS} = 0V, I_D = 250μA
		P-Ch	-55	—	—		V_{GS} = 0V, I_D = -250μA
$\Delta V_{(BR)DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	N-Ch	—	0.059	—	V/°C	Reference to 25°C, I_D = 1mA
		P-Ch	—	0.054	—		Reference to 25°C, I_D = -1mA
$R_{DS(ON)}$	Static Drain-to-Source On-Resistance	N-Ch	—	0.043	0.050	Ω	V_{GS} = 10V, I_D = 4.7A ④
			—	0.056	0.065		V_{GS} = 4.5V, I_D = 3.8A ④
		P-Ch	—	0.095	0.105		V_{GS} = -10V, I_D = -3.4A ④
			—	0.150	0.170		V_{GS} = -4.5V, I_D = -2.7A ④
$V_{GS(th)}$	Gate Threshold Voltage	N-Ch	1.0	—	—	V	V_{DS} = V_{GS}, I_D = 250μA
		P-Ch	-1.0	—	—		V_{DS} = V_{GS}, I_D = -250μA
g_{fs}	Forward Transconductance	N-Ch	7.9	—	—	S	V_{DS} = 10V, I_D = 4.5A ④
		P-Ch	3.3	—	—		V_{DS} = -10V, I_D = -3.1A ④
I_{DSS}	Drain-to-Source Leakage Current	N-Ch	—	—	2.0	μA	V_{DS} = 55V, V_{GS} = 0V
		P-Ch	—	—	-2.0		V_{DS} = -55V, V_{GS} = 0V
		N-Ch	—	—	25		V_{DS} = 55V, V_{GS} = 0V, T_J = 55°C
		P-Ch	—	—	-25		V_{DS} = -55V, V_{GS} = 0V, T_J = 55°C
I_{GSS}	Gate-to-Source Forward Leakage	N-P	—	—	±100	nA	V_{GS} = ±20V
Q_g	Total Gate Charge	N-Ch	—	24	36	nC	N-Channel I_D = 4.5A, V_{DS} = 44V, V_{GS} = 10V ④ P-Channel I_D = -3.1A, V_{DS} = -44V, V_{GS} = -10V
		P-Ch	—	26	38		
Q_{gs}	Gate-to-Source Charge	N-Ch	—	2.3	3.4		
		P-Ch	—	3.0	4.5		
Q_{gd}	Gate-to-Drain ("Miller") Charge	N-Ch	—	7.0	10		
		P-Ch	—	8.4	13		
$t_{d(on)}$	Turn-On Delay Time	N-Ch	—	8.3	12	ns	N-Channel V_{DD} = 28V, I_D = 1.0A, R_G = 6.0Ω, R_D = 28Ω ④ P-Channel V_{DD} = -28V, I_D = -1.0A, R_G = 6.0Ω, R_D = 28Ω
		P-Ch	—	14	22		
t_r	Rise Time	N-Ch	—	3.2	4.8		
		P-Ch	—	10	15		
$t_{d(off)}$	Turn-Off Delay Time	N-Ch	—	32	48		
		P-Ch	—	43	64		
t_f	Fall Time	N-Ch	—	13	20		
		P-Ch	—	22	32		
C_{iss}	Input Capacitance	N-Ch	—	740	—	pF	N-Channel V_{GS} = 0V, V_{DS} = 25V, f = 1.0MHz P-Channel V_{GS} = 0V, V_{DS} = -25V, f = 1.0MHz
		P-Ch	—	690	—		
C_{oss}	Output Capacitance	N-Ch	—	190	—		
		P-Ch	—	210	—		
C_{rss}	Reverse Transfer Capacitance	N-Ch	—	71	—		
		P-Ch	—	86	—		

Source-Drain Ratings and Characteristics

	Parameter		Min.	Typ.	Max.	Units	Conditions
I_S	Continuous Source Current (Body Diode)	N-Ch	—	—	2.0	A	
		P-Ch	—	—	-2.0		
I_{SM}	Pulsed Source Current (Body Diode) ①	N-Ch	—	—	38		
		P-Ch	—	—	-27		
V_{SD}	Diode Forward Voltage	N-Ch	—	0.70	1.2	V	T_J = 25°C, I_S = 2.0A, V_{GS} = 0V ③
		P-Ch	—	-0.80	-1.2		T_J = 25°C, I_S = -2.0A, V_{GS} = 0V ③
t_{rr}	Reverse Recovery Time	N-Ch	—	60	90	ns	N-Channel T_J = 25°C, I_F =2.0A, di/dt = 100A/μs ④ P-Channel T_J = 25°C, I_F = -2.0A, di/dt = 100A/μs
		P-Ch	—	54	80		
Q_{rr}	Reverse Recovery Charge	N-Ch	—	120	170	nC	
		P-Ch	—	85	130		

Notes:

① Repetitive rating; pulse width limited by max. junction temperature. (See fig. 22)

② N-Channel $I_{SD} \leq$ 4.7A, di/dt $\leq$ 220A/μs, $V_{DD} \leq V_{(BR)DSS}$, $T_J \leq$ 150°C
P-Channel $I_{SD} \leq$ -3.4A, di/dt $\leq$ -150A/μs, $V_{DD} \leq V_{(BR)DSS}$, $T_J \leq$ 150°C

③ N-Channel Starting T_J = 25°C, L = 6.5mH R_G = 25Ω, I_{AS} = 4.7A.
P-Channel Starting T_J = 25°C, L = 20mH R_G = 25Ω, I_{AS} = -3.4A.

④ Pulse width $\leq$ 300μs; duty cycle $\leq$ 2%.

⑤ Surface mounted on FR-4 board, t $\leq$ 10sec.

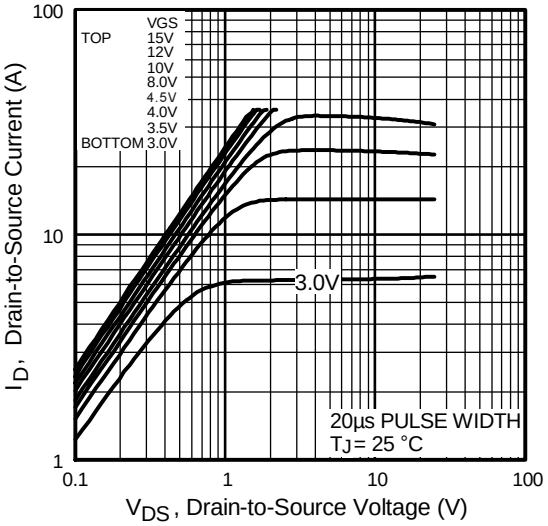

Fig 1. Typical Output Characteristics

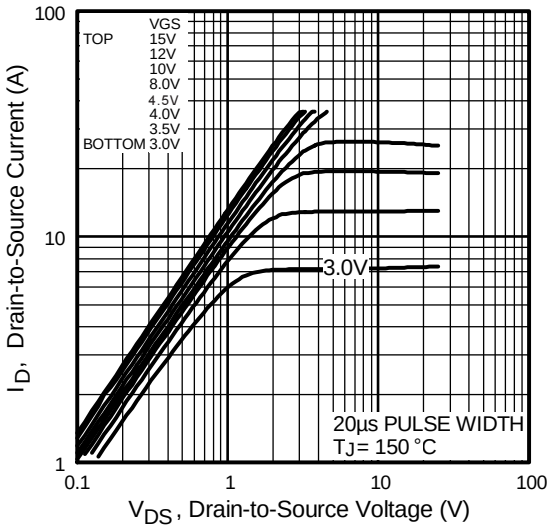

Fig 2. Typical Output Characteristics

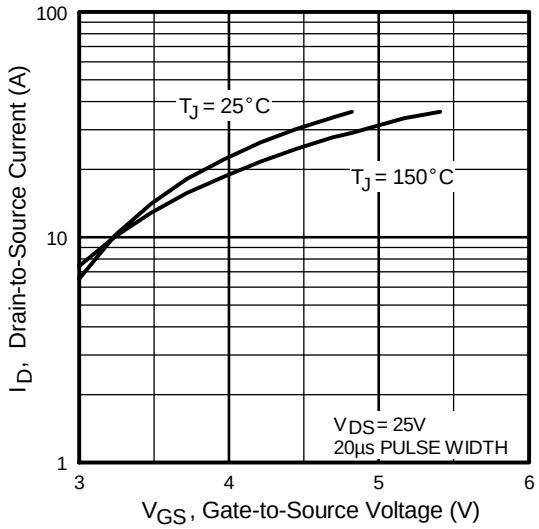

Fig 3. Typical Transfer Characteristics

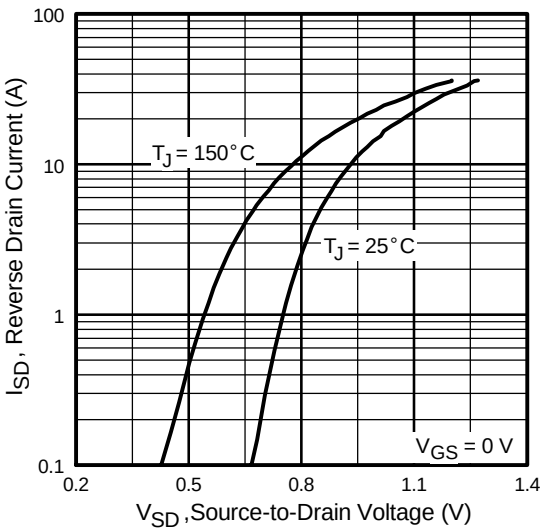

Fig 4. Typical Source-Drain Diode Forward Voltage

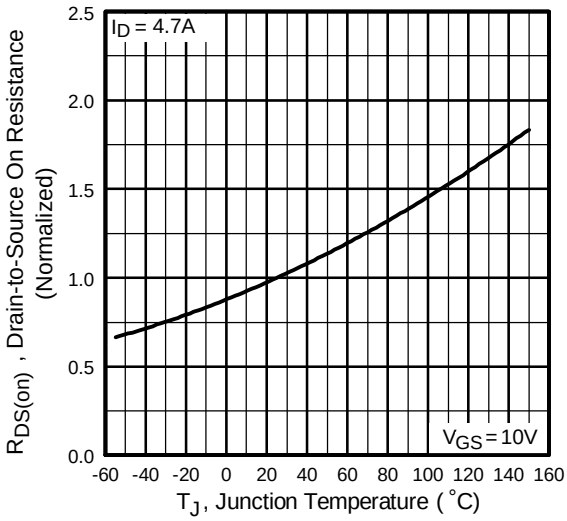

Fig 5. Normalized On-Resistance Vs. Temperature

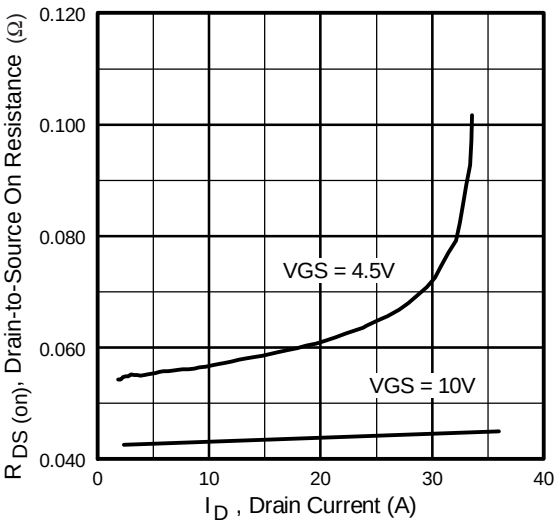

Fig 6. Typical On-Resistance Vs. Drain Current

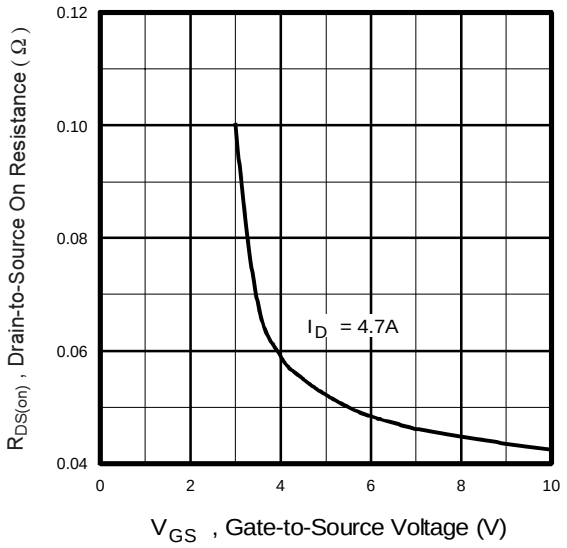

Fig 7. Typical On-Resistance Vs. Gate Voltage

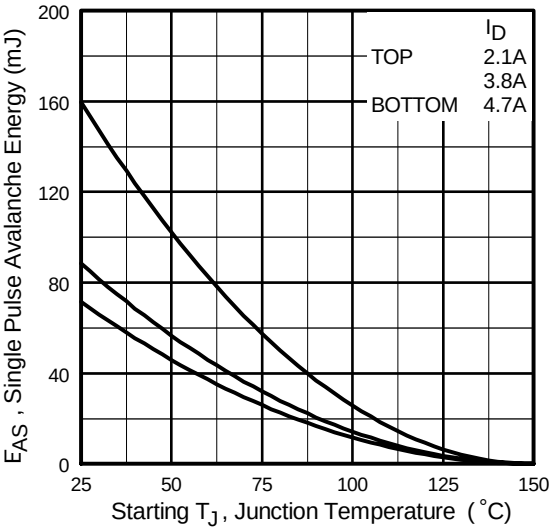

Fig 8. Maximum Avalanche Energy Vs. Drain Current

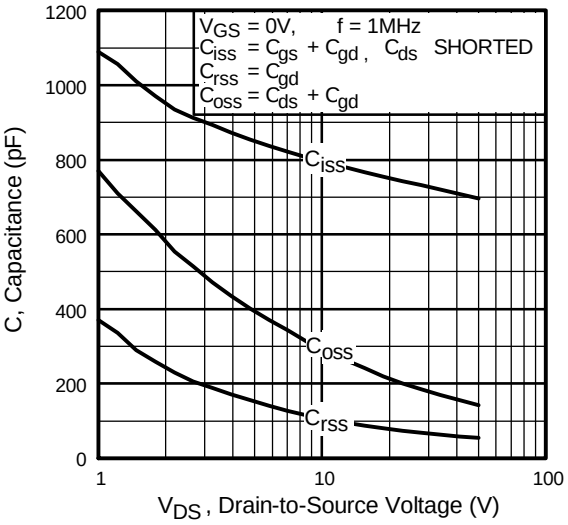

Fig 9. Typical Capacitance Vs. Drain-to-Source Voltage

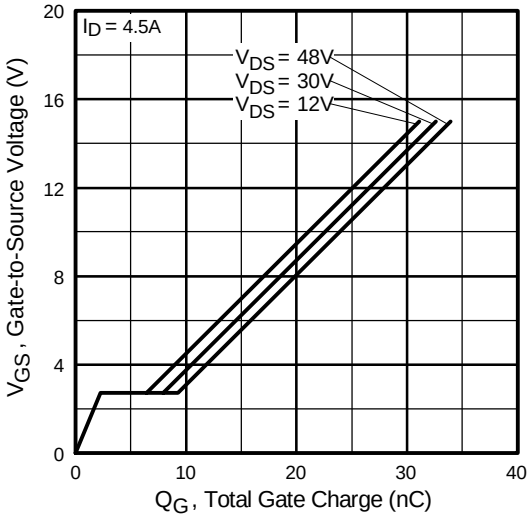

Fig 10. Typical Gate Charge Vs. Gate-to-Source Voltage

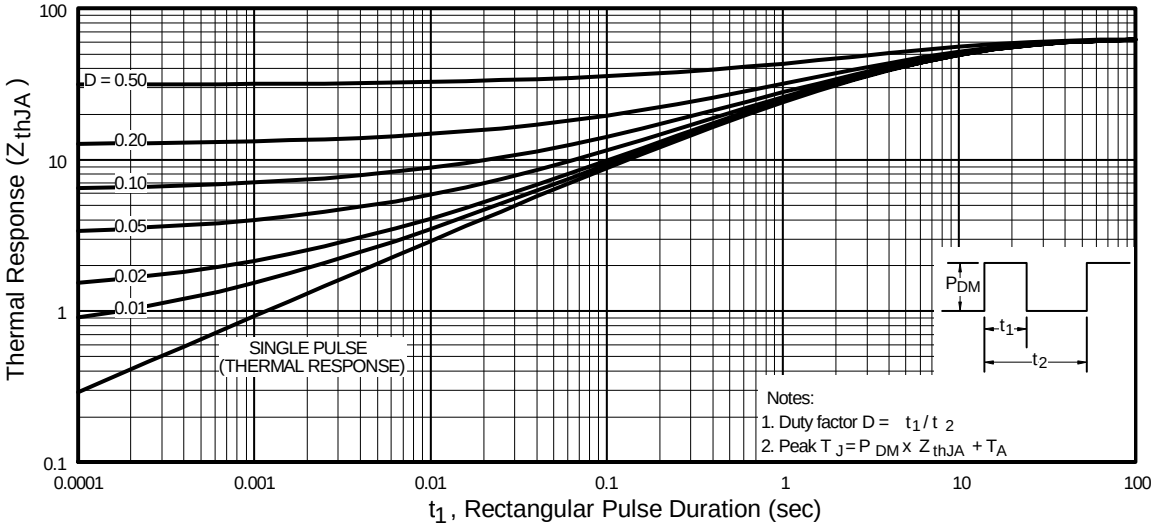

Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

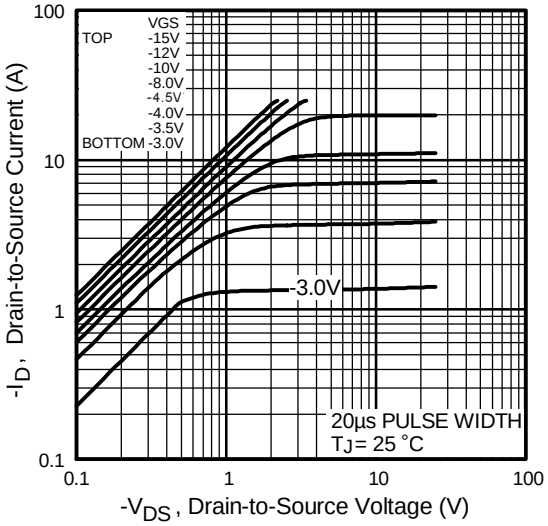

Fig 12. Typical Output Characteristics

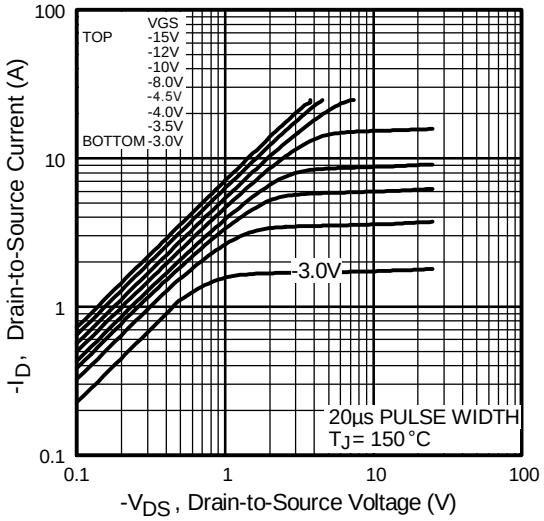

Fig 13. Typical Output Characteristics

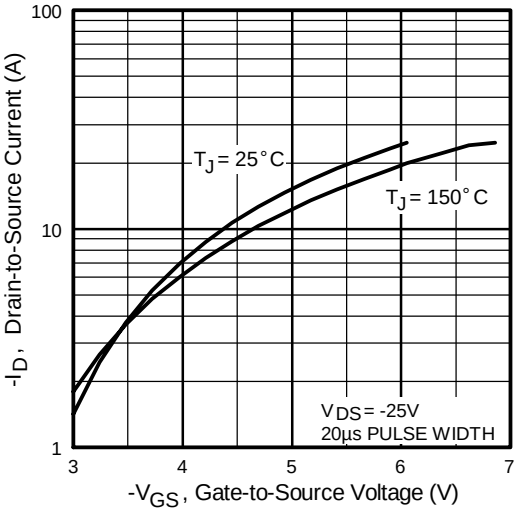

Fig 14. Typical Transfer Characteristics

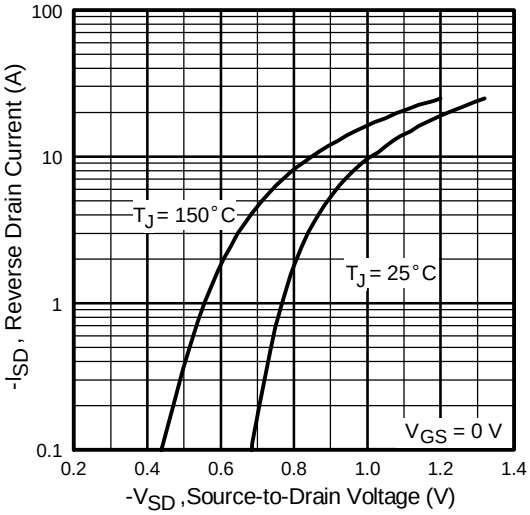

Fig 15. Typical Source-Drain Diode Forward Voltage

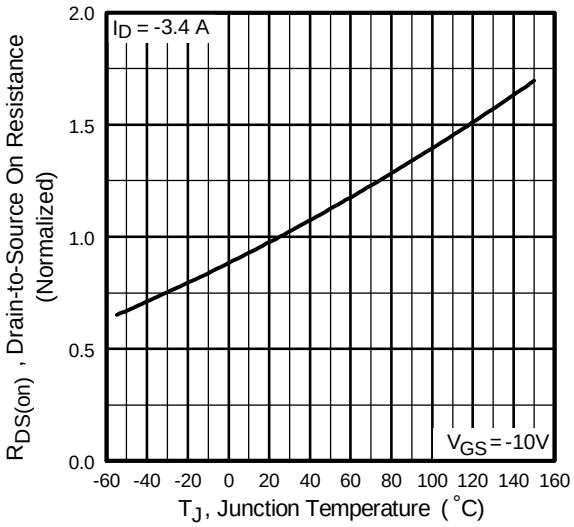

Fig 16. Normalized On-Resistance Vs. Temperature

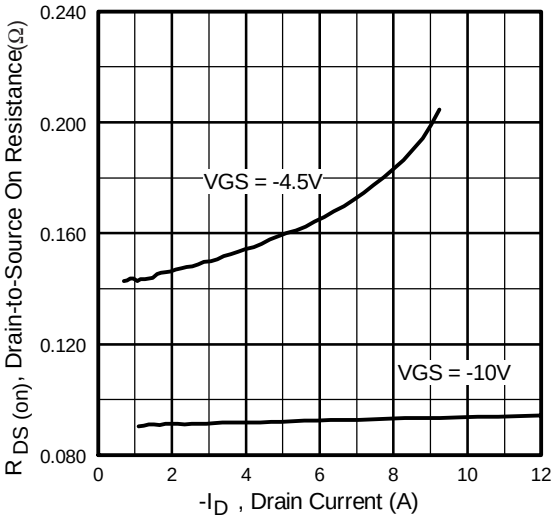

Fig 17. Typical On-Resistance Vs. Drain Current

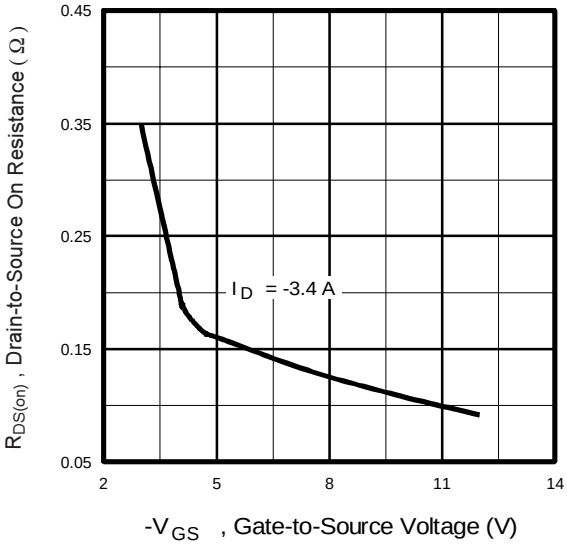

Fig 18. Typical On-Resistance Vs. Gate Voltage

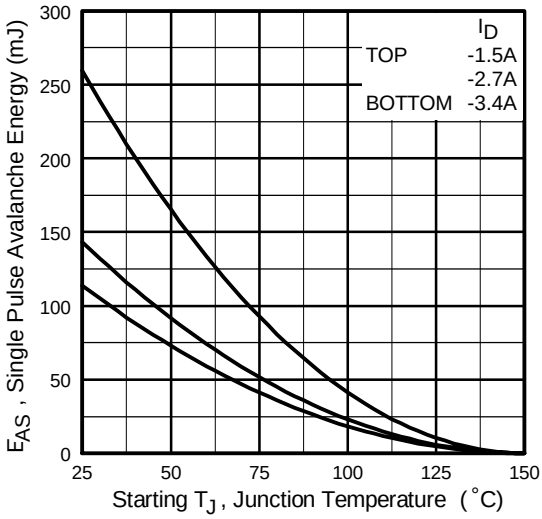

Fig 19. Maximum Avalanche Energy Vs. Drain Current

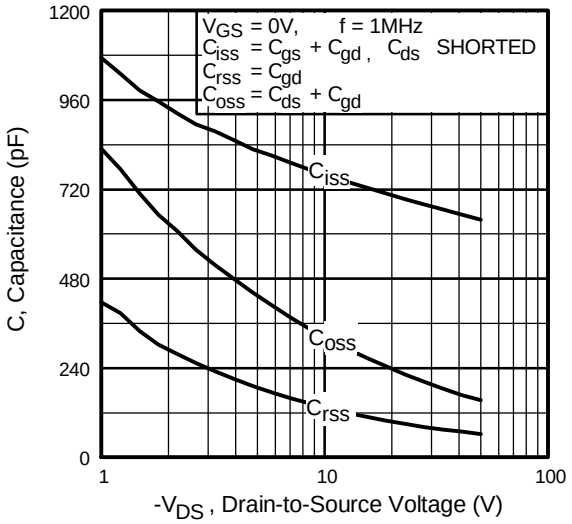

Fig 20. Typical Capacitance Vs. Drain-to-Source Voltage

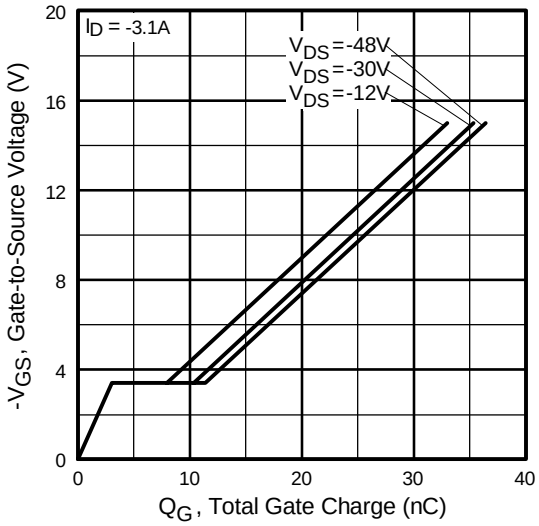

Fig 21. Typical Gate Charge Vs. Gate-to-Source Voltage

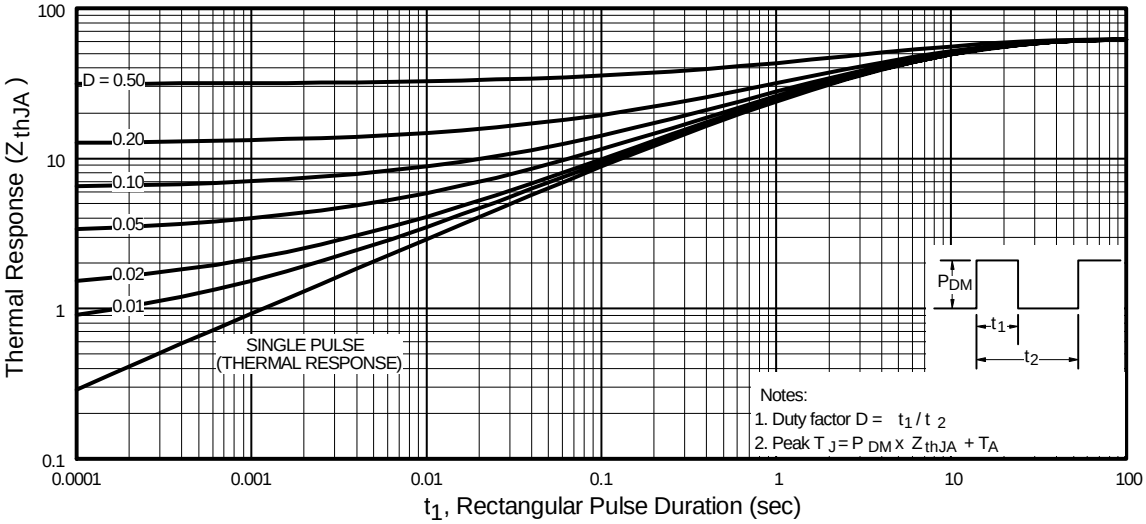

Fig 22. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

SO-8 Package Outline

Dimensions are shown in millimeters (inches)

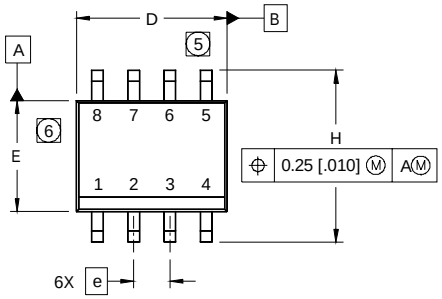

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.0532	.0688	1.35	1.75
A1	.0040	.0098	0.10	0.25
b	.013	.020	0.33	0.51
c	.0075	.0098	0.19	0.25
D	.189	.1968	4.80	5.00
E	.1497	.1574	3.80	4.00
e	.050 BASIC		1.27 BASIC	
e 1	.025 BASIC		0.635 BASIC	
H	.2284	.2440	5.80	6.20
K	.0099	.0196	0.25	0.50
L	.016	.050	0.40	1.27
y	0°	8°	0°	8°

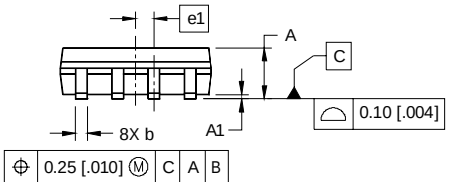



NOTES:

1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: MILLIMETER
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-012AA.
5. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.15 [.006].
6. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.25 [.010].
7. DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO A SUBSTRATE.

FOOTPRINT

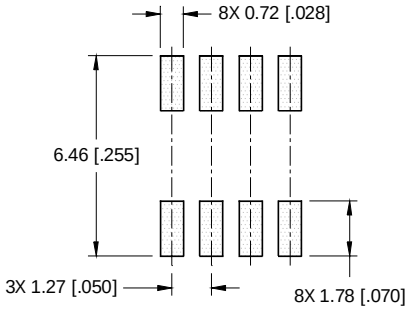

SO-8 Part Marking

EXAMPLE: THIS IS AN IRF7101 (MOSFET)

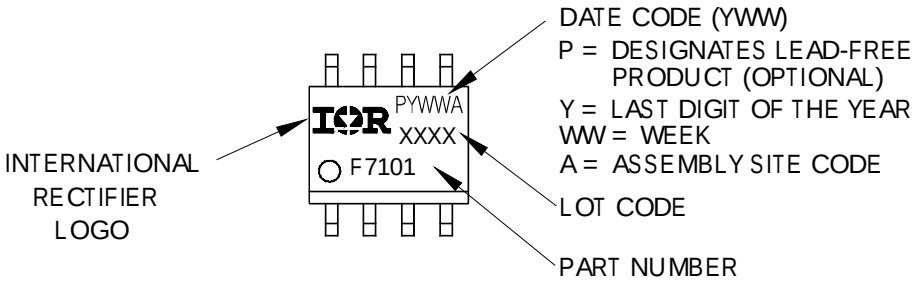

SO-8 Tape and Reel

Dimensions are shown in millimeters (inches)

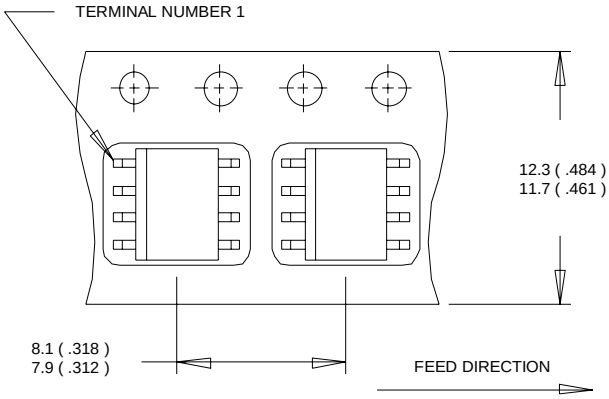

NOTES:
1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

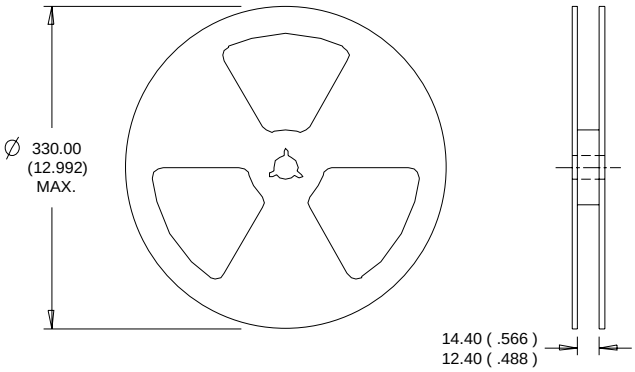

NOTES :
1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Data and specifications subject to change without notice.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903
Visit us at www.irf.com for sales contact information. 04/05