

# IRF8707GPbF

HEXFET® Power MOSFET

## Applications

- Control MOSFET of Sync-Buck Converters used for Notebook Processor Power
- Control MOSFET for Isolated DC-DC Converters in Networking Systems

## Benefits

- Very Low Gate Charge
- Very Low  $R_{DS(on)}$  at 4.5V  $V_{GS}$
- Ultra-Low Gate Impedance
- Fully Characterized Avalanche Voltage and Current
- 20V  $V_{GS}$  Max. Gate Rating
- 100% tested for Rg
- Lead-Free
- Halogen-Free

## Description

The IRF8707GPbF incorporates the latest HEXFET Power MOSFET Silicon Technology into the industry standard SO-8 package. The IRF8707GPbF has been optimized for parameters that are critical in synchronous buck operation including  $R_{DS(on)}$  and gate charge to reduce both conduction and switching losses. The reduced total losses make this product ideal for high efficiency DC-DC converters that power the latest generation of processors for notebook and Netcom applications.

## Absolute Maximum Ratings

|                                | Parameter                                           | Max.         | Units |
|--------------------------------|-----------------------------------------------------|--------------|-------|
| $V_{DS}$                       | Drain-to-Source Voltage                             | 30           | V     |
| $V_{GS}$                       | Gate-to-Source Voltage                              | $\pm 20$     |       |
| $I_D @ T_A = 25^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ 10\text{V}$     | 11           | A     |
| $I_D @ T_A = 70^\circ\text{C}$ | Continuous Drain Current, $V_{GS} @ 10\text{V}$     | 9.1          |       |
| $I_{DM}$                       | Pulsed Drain Current ①                              | 88           |       |
| $P_D @ T_A = 25^\circ\text{C}$ | Power Dissipation                                   | 2.5          | W     |
| $P_D @ T_A = 70^\circ\text{C}$ | Power Dissipation                                   | 1.6          |       |
|                                | Linear Derating Factor                              | 0.02         | W/°C  |
| $T_J$<br>$T_{STG}$             | Operating Junction and<br>Storage Temperature Range | -55 to + 150 | °C    |



## Thermal Resistance

|                 | Parameter                | Typ. | Max. | Units |
|-----------------|--------------------------|------|------|-------|
| $R_{\theta JL}$ | Junction-to-Drain Lead ⑤ | —    | 20   | °C/W  |
| $R_{\theta JA}$ | Junction-to-Ambient ④    | —    | 50   |       |

Notes ① through ⑤ are on page 9

www.irf.com

| $V_{DSS}$ | $R_{DS(on)}$ max                       | Qg    |
|-----------|----------------------------------------|-------|
| 30V       | 11.9m $\Omega$ @ $V_{GS} = 10\text{V}$ | 6.2nC |



# IRF8707GPbF

International  
IR Rectifier


Static @  $T_J = 25^\circ\text{C}$  (unless otherwise specified)





|                              | Parameter                            | Min. | Typ.  | Max. | Units                | Conditions                                                                        |
|------------------------------|--------------------------------------|------|-------|------|----------------------|-----------------------------------------------------------------------------------|
| $BV_{DSS}$                   | Drain-to-Source Breakdown Voltage    | 30   | —     | —    | V                    | $V_{GS} = 0V, I_D = 250\mu A$                                                     |
| $\Delta BV_{DSS}/\Delta T_J$ | Breakdown Voltage Temp. Coefficient  | —    | 0.022 | —    | V/ $^\circ\text{C}$  | Reference to $25^\circ\text{C}, I_D = 1mA$                                        |
| $R_{DS(on)}$                 | Static Drain-to-Source On-Resistance | —    | 9.3   | 11.9 | m $\Omega$           | $V_{GS} = 10V, I_D = 11A$ ③                                                       |
|                              |                                      | —    | 14.2  | 17.5 |                      | $V_{GS} = 4.5V, I_D = 8.8A$ ③                                                     |
| $V_{GS(th)}$                 | Gate Threshold Voltage               | 1.35 | 1.80  | 2.35 | V                    | $V_{DS} = V_{GS}, I_D = 25\mu A$                                                  |
| $\Delta V_{GS(th)}$          | Gate Threshold Voltage Coefficient   | —    | -5.8  | —    | mV/ $^\circ\text{C}$ | $V_{DS} = V_{GS}, I_D = 25\mu A$                                                  |
| $I_{DSS}$                    | Drain-to-Source Leakage Current      | —    | —     | 1.0  | $\mu A$              | $V_{DS} = 24V, V_{GS} = 0V$                                                       |
|                              |                                      | —    | —     | 150  |                      | $V_{DS} = 24V, V_{GS} = 0V, T_J = 125^\circ\text{C}$                              |
| $I_{GSS}$                    | Gate-to-Source Forward Leakage       | —    | —     | 100  | nA                   | $V_{GS} = 20V$                                                                    |
|                              | Gate-to-Source Reverse Leakage       | —    | —     | -100 |                      | $V_{GS} = -20V$                                                                   |
| $g_{fs}$                     | Forward Transconductance             | 25   | —     | —    | S                    | $V_{DS} = 15V, I_D = 8.8A$                                                        |
| $Q_g$                        | Total Gate Charge                    | —    | 6.2   | 9.3  | nC                   | $V_{DS} = 15V$<br>$V_{GS} = 4.5V$<br>$I_D = 8.8A$<br>See Figs. 15 & 16            |
| $Q_{gs1}$                    | Pre-Vth Gate-to-Source Charge        | —    | 1.4   | —    |                      |                                                                                   |
| $Q_{gs2}$                    | Post-Vth Gate-to-Source Charge       | —    | 0.7   | —    |                      |                                                                                   |
| $Q_{gd}$                     | Gate-to-Drain Charge                 | —    | 2.2   | —    |                      |                                                                                   |
| $Q_{godr}$                   | Gate Charge Overdrive                | —    | 1.9   | —    |                      |                                                                                   |
| $Q_{sw}$                     | Switch Charge ( $Q_{gs2} + Q_{gd}$ ) | —    | 2.9   | —    |                      |                                                                                   |
| $Q_{oss}$                    | Output Charge                        | —    | 3.7   | —    | nC                   | $V_{DS} = 16V, V_{GS} = 0V$                                                       |
| $R_g$                        | Gate Resistance                      | —    | 2.2   | 3.7  | $\Omega$             |                                                                                   |
| $t_{d(on)}$                  | Turn-On Delay Time                   | —    | 6.7   | —    | ns                   | $V_{DD} = 15V, V_{GS} = 4.5V$<br>$I_D = 8.8A$<br>$R_G = 1.8\Omega$<br>See Fig. 18 |
| $t_r$                        | Rise Time                            | —    | 7.9   | —    |                      |                                                                                   |
| $t_{d(off)}$                 | Turn-Off Delay Time                  | —    | 7.3   | —    |                      |                                                                                   |
| $t_f$                        | Fall Time                            | —    | 4.4   | —    |                      |                                                                                   |
| $C_{iss}$                    | Input Capacitance                    | —    | 760   | —    | pF                   | $V_{GS} = 0V$                                                                     |
| $C_{oss}$                    | Output Capacitance                   | —    | 170   | —    |                      | $V_{DS} = 15V$                                                                    |
| $C_{rss}$                    | Reverse Transfer Capacitance         | —    | 82    | —    |                      | $f = 1.0MHz$                                                                      |

## Avalanche Characteristics

|          | Parameter                       | Typ. | Max. | Units |
|----------|---------------------------------|------|------|-------|
| $E_{AS}$ | Single Pulse Avalanche Energy ② | —    | 53   | mJ    |
| $I_{AR}$ | Avalanche Current ①             | —    | 8.8  | A     |


## Diode Characteristics

|          | Parameter                                 | Min.                                                                 | Typ. | Max. | Units | Conditions                                                                                                                                                       |
|----------|-------------------------------------------|----------------------------------------------------------------------|------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $I_S$    | Continuous Source Current<br>(Body Diode) | —                                                                    | —    | 3.1  | A     | MOSFET symbol<br>showing the<br>integral reverse<br>p-n junction diode.<br> |
| $I_{SM}$ | Pulsed Source Current<br>(Body Diode) ①   | —                                                                    | —    | 88   | A     |                                                                                                                                                                  |
| $V_{SD}$ | Diode Forward Voltage                     | —                                                                    | —    | 1.0  | V     | $T_J = 25^\circ\text{C}, I_S = 8.8A, V_{GS} = 0V$ ③                                                                                                              |
| $t_{rr}$ | Reverse Recovery Time                     | —                                                                    | 12   | 18   | ns    | $T_J = 25^\circ\text{C}, I_F = 8.8A, V_{DD} = 15V$                                                                                                               |
| $Q_{rr}$ | Reverse Recovery Charge                   | —                                                                    | 13   | 20   | nC    | $di/dt = 300A/\mu s$ ③                                                                                                                                           |
| $t_{on}$ | Forward Turn-On Time                      | Intrinsic turn-on time is negligible (turn-on is dominated by LS+LD) |      |      |       |                                                                                                                                                                  |

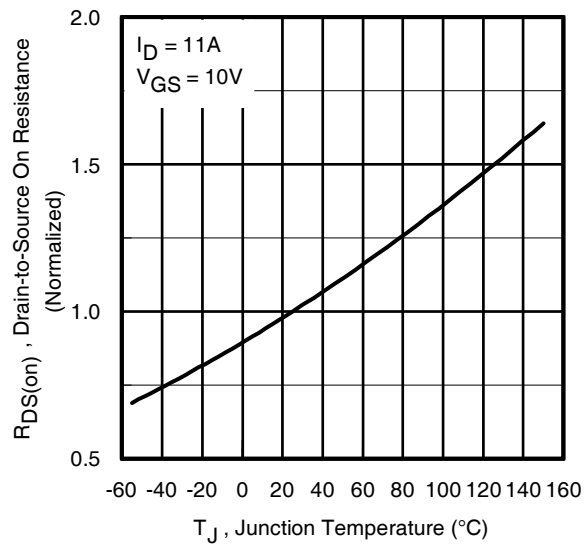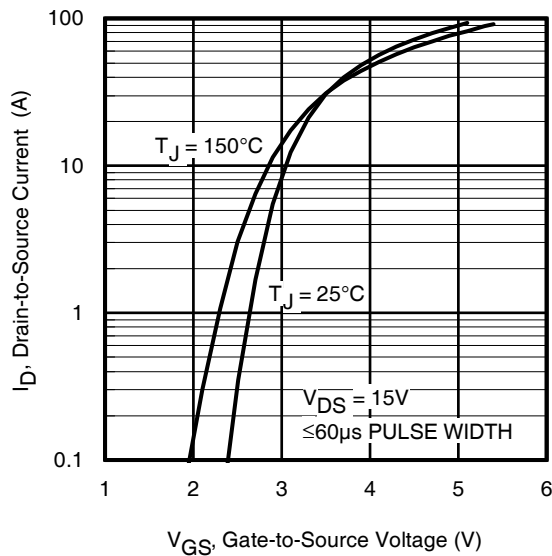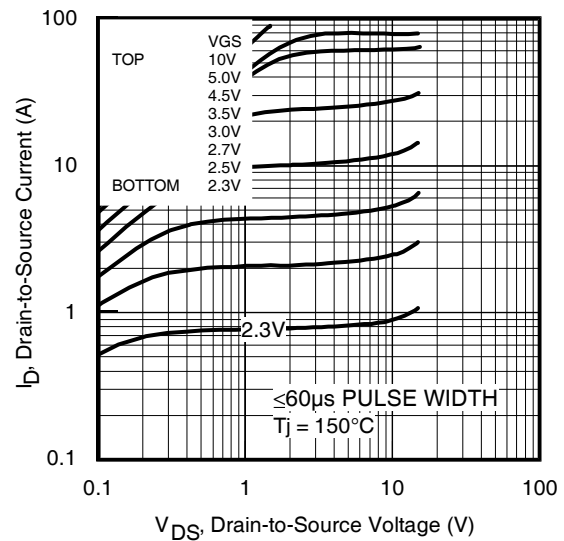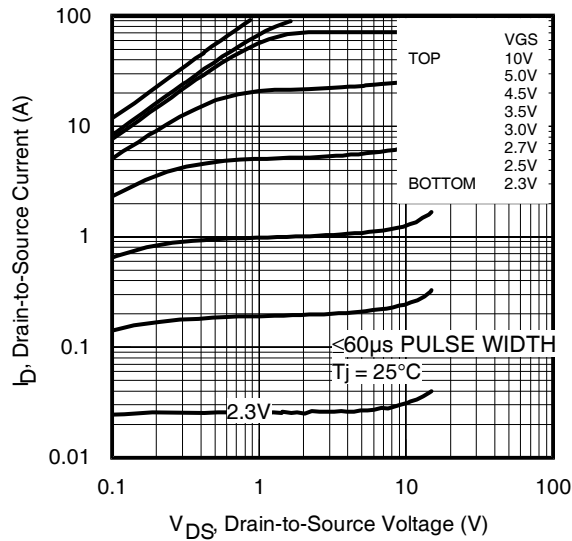


# IRF8707GPbF


International  
**IR** Rectifier

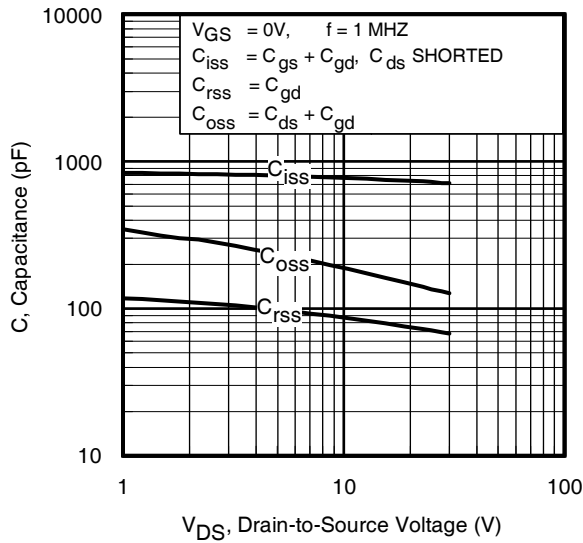


**Fig 5.** Typical Capacitance vs. Drain-to-Source Voltage

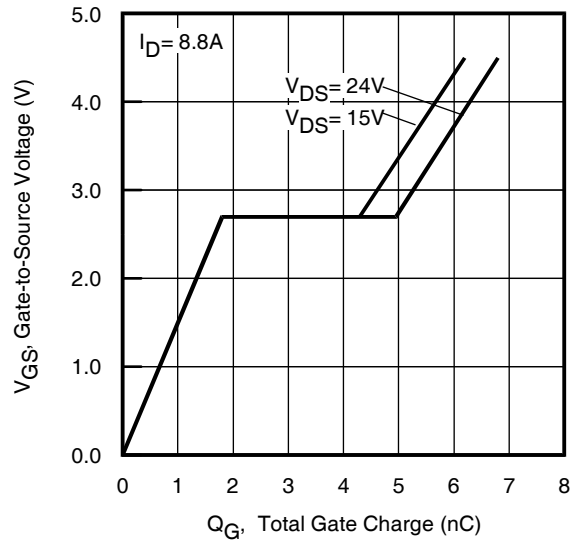


**Fig 6.** Typical Gate Charge Vs. Gate-to-Source Voltage

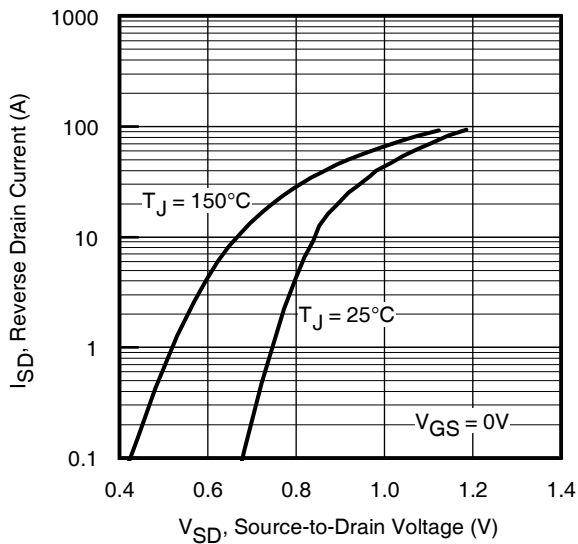


**Fig 7.** Typical Source-Drain Diode Forward Voltage

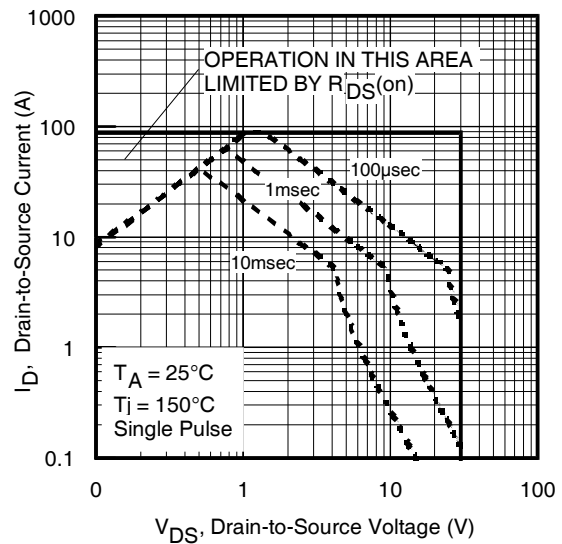


**Fig 8.** Maximum Safe Operating Area

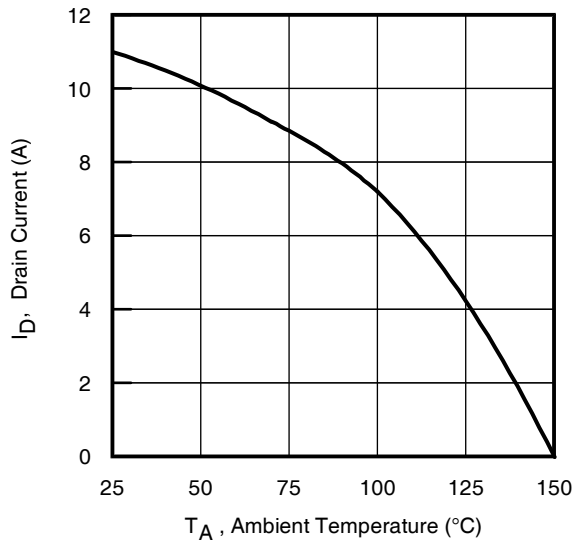

**Fig 9.** Maximum Drain Current vs. Ambient Temperature

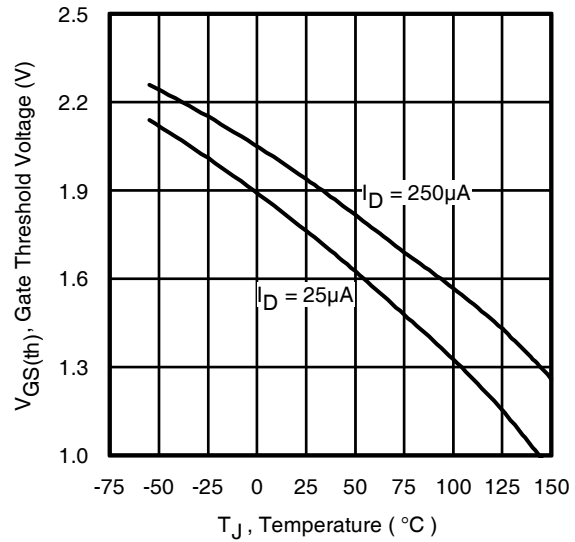


**Fig 10.** Threshold Voltage vs. Temperature

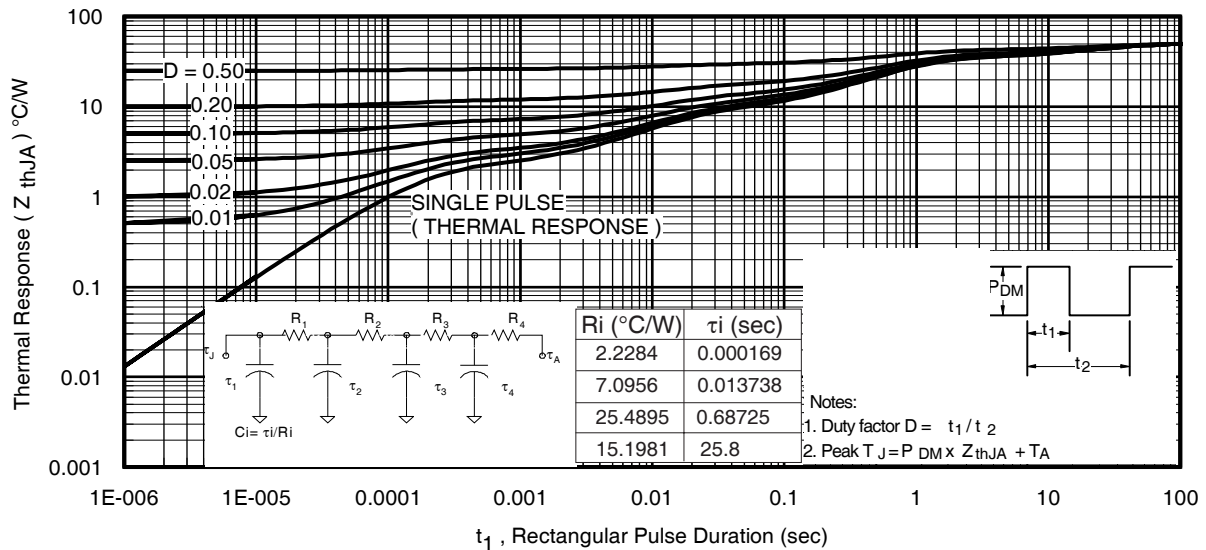


**Fig 11.** Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

# IRF8707GPbF


International  
**IR** Rectifier

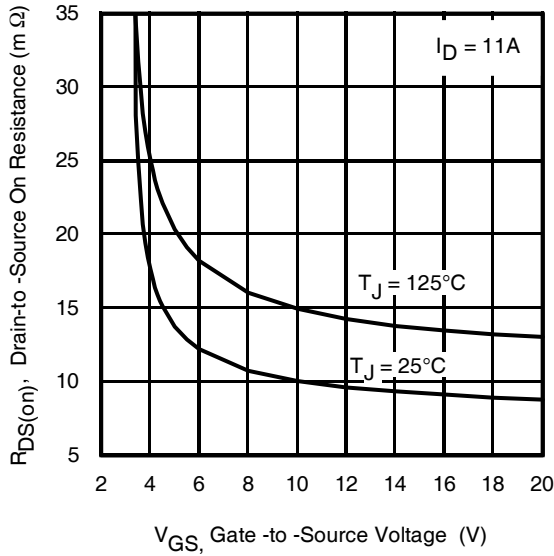


**Fig 12.** On-Resistance vs. Gate Voltage

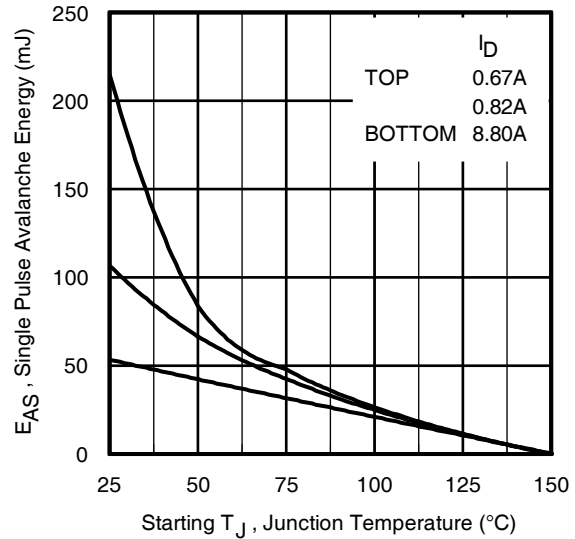


**Fig 13.** Maximum Avalanche Energy vs. Drain Current

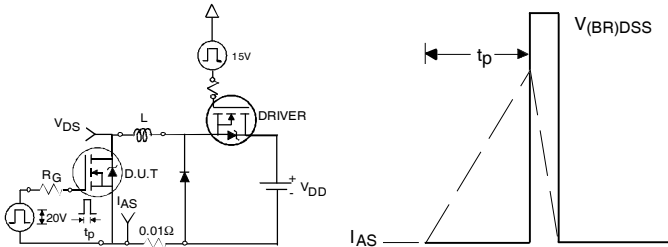



**Fig 14.** Unclamped Inductive Test Circuit and Waveform

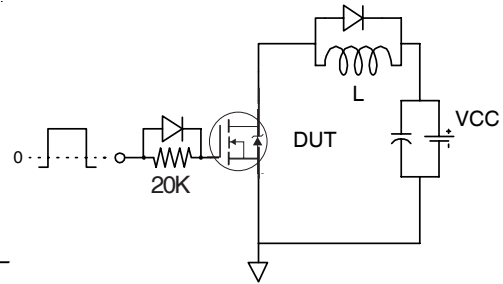

**Fig 15.** Gate Charge Test Circuit

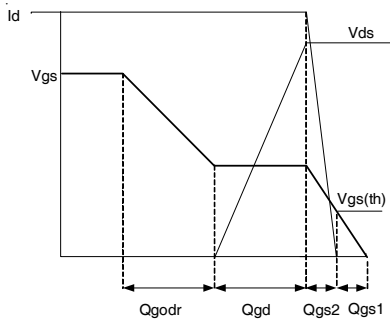


**Fig 16.** Gate Charge Waveform

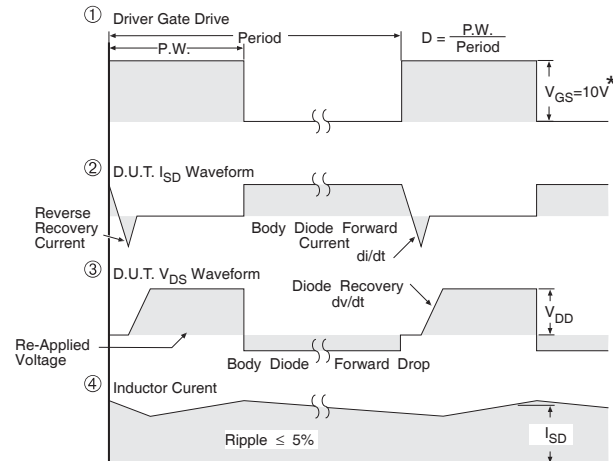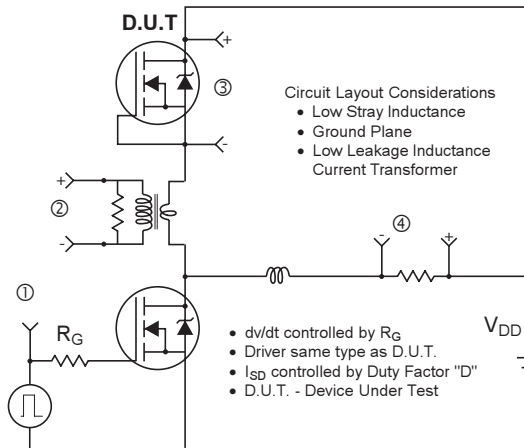


\*  $V_{GS} = 5V$  for Logic Level Devices

**Fig 17. Peak Diode Recovery  $dv/dt$  Test Circuit for N-Channel HEXFET® Power MOSFETs**

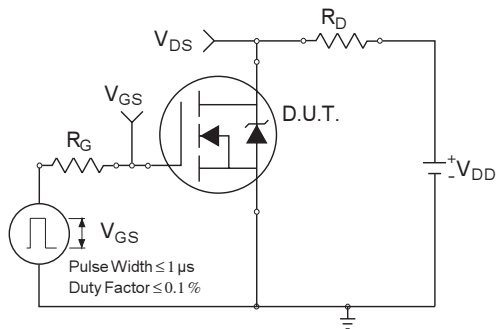

**Fig 18a. Switching Time Test Circuit**

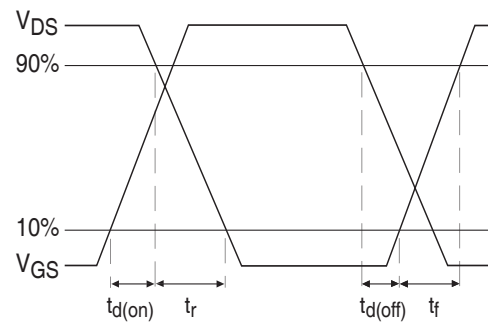


**Fig 18b. Switching Time Waveforms**

# IRF8707GPbF


International  
**IR** Rectifier

## SO-8 Package Outline(Mosfet & Fetky)

Dimensions are shown in millimeters (inches)

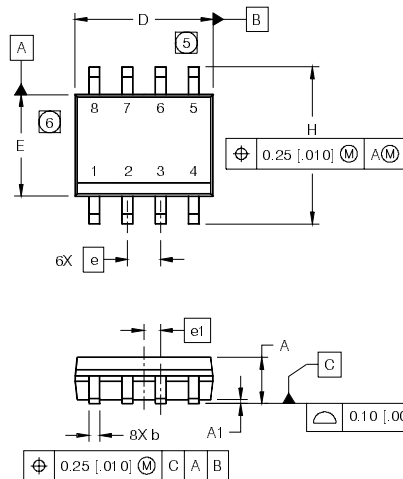


| DIM | INCHES     |       | MILLIMETERS |      |
|-----|------------|-------|-------------|------|
|     | MIN        | MAX   | MIN         | MAX  |
| A   | .0532      | .0688 | 1.35        | 1.75 |
| A1  | .0040      | .0098 | 0.10        | 0.25 |
| b   | .013       | .020  | 0.33        | 0.51 |
| c   | .0075      | .0098 | 0.19        | 0.25 |
| D   | .189       | .1968 | 4.80        | 5.00 |
| E   | .1497      | .1574 | 3.80        | 4.00 |
| e   | .050 BASIC |       | 1.27 BASIC  |      |
| e1  | .025 BASIC |       | 0.635 BASIC |      |
| H   | .2284      | .2440 | 5.80        | 6.20 |
| K   | .0099      | .0196 | 0.25        | 0.50 |
| L   | .016       | .050  | 0.40        | 1.27 |
| y   | 0°         | 8°    | 0°          | 8°   |



### NOTES:


1. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1 1994.
2. CONTROLLING DIMENSION: MILLIMETER
3. DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
4. OUTLINE CONFORMS TO JEDEC OUTLINE MS-012AA.
5. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.15 [0.006].
6. DIMENSION DOES NOT INCLUDE MOLD PROTRUSIONS. MOLD PROTRUSIONS NOT TO EXCEED 0.25 [0.010].
7. DIMENSION IS THE LENGTH OF LEAD FOR SOLDERING TO A SUBSTRATE.

### FOOTPRINT

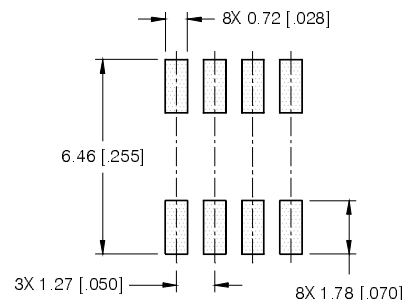

## SO-8 Part Marking Information


EXAMPLE: THIS IS AN IRF8707GPBF

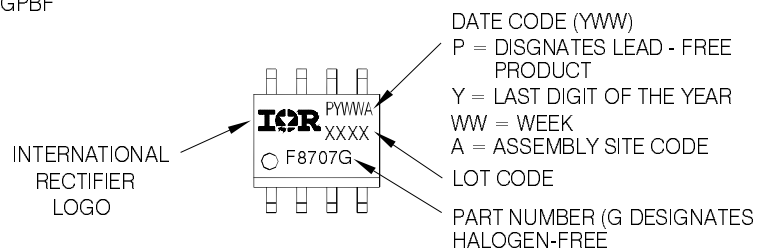


Note: For the most current drawing please refer to IR website at <http://www.irf.com/package/>

## SO-8 Tape and Reel

Dimensions are shown in millimeters (inches)

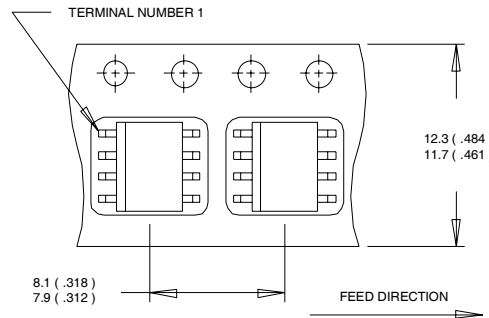

- NOTES:
1. CONTROLLING DIMENSION : MILLIMETER.
  2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
  3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

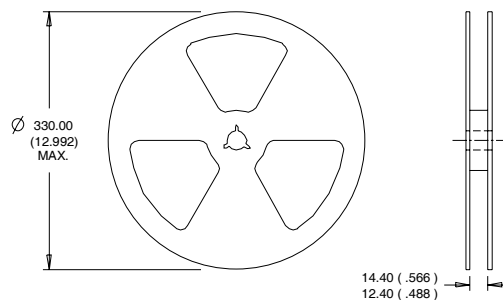

- NOTES :
1. CONTROLLING DIMENSION : MILLIMETER.
  2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

### Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting  $T_J = 25^\circ\text{C}$ ,  $L = 1.38\text{mH}$ ,  $R_G = 25\Omega$ ,  $I_{AS} = 8.8\text{A}$ .
- ③ Pulse width  $\leq 400\mu\text{s}$ ; duty cycle  $\leq 2\%$ .
- ④ When mounted on 1 inch square copper board.
- ⑤  $R_{\theta}$  is measured at  $T_J$  of approximately  $90^\circ\text{C}$ .

**Note:** For the most current drawing please refer to IR website at <http://www.irf.com/package>

Data and specifications subject to change without notice.

This product has been designed and qualified for the Consumer market.

Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7903

Visit us at [www.irf.com](http://www.irf.com) for sales contact information.07/2009

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[International Rectifier:](#)

[IRF8707GPBF](#)