

IR series

Sealed pushbutton switches - bushing Ø 16 mm - momentary

Distinctive features

UG1410-A-R1

The IR series is a range of sealed momentary pushbutton switches with dia. 16 mm bushing. This series is divided into 2 families : standard models and microswitch technology models.

Common features

- Sealed to IP67
- Illuminated or non-illuminated
- Tactile feedback
- Square or round actuator
- Wide choice of bezel and actuator colours
- Wide choice of illumination colours


Standard versions

- Numerous terminal options : solder, flying lead, straight PC, quick-connect, screw
- Screw versions withstanding up to 4A
- Electrical function : NO (2 terminals)



Microswitch versions

- Withstanding up to 5A
- Two electrical functions :
NC+NO (3 terminals)
NC/NO combined (4 terminals)

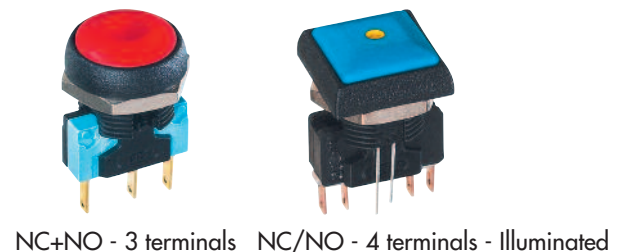


Optional marking

Actuator marking is available on request for models with flat round actuator.



Integrated resistor

On wire lead illuminated versions, the LED resistor can be integrated in the product by APEM. On request.





- ☐ Screw version up to 4A
- ☐ Tactile feedback
- ☐ Sealed to IP67
- ☐ Illuminated or non-illuminated
New : illuminated round bezel now available !
- ☐ Flat round actuator for optional marking

ENVIRONMENTAL SPECIFICATIONS

- Front panel sealing : IP67 according to IEC 60529
- Shock resistance : 100 g according to IEC 512-4, test 6c
- Vibration resistance : 10-500Hz - 10 g according to IEC 512-4, test 6d
- Salt spray : IEC 512-6, test 11f
- Operating temperature : -40°C to +85°C

ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :
 - Gold plated contacts : Code 4 : 200mA 48VDC, 500.000 cycles
 - Code 7 : 5A 28VDC, 70.000 cycles
 - Silver contacts (code 2) - screw terminals : 4A 48VDC, 500.000 cycles
- Initial contact resistance : 100 mΩ max.
- Insulation resistance : 1 GΩ min. at 500VDC
- Dielectric strength : 1.500 Vrms

LED COMPONENT SPECIFICATIONS

LED colour	Forward current	Typ. forward voltage	Max. forward voltage
Super red (0S)	20mA	2,1V	2,3V
Yellow (0Y)	20mA	2,1V	2,3V
Green (0G)	20mA	2,1V	2,3V
Blue (0B)	20mA	3,2V	3,8V
White (0W)	20mA	3,35V	4,25V
Red/green (SG)	20mA	Red:1,95V-Green:2,1V	2,5V

A resistor must be series-connected by the user.

Resistor value = $\frac{\text{supply voltage} - \text{LED forward voltage}}{\text{LED forward current}}$

LED forward current

On flying lead versions, the LED resistor can be integrated by APEM on request.

GENERAL SPECIFICATIONS


- Panel thickness : 8 mm (.314) max.
- Total travel : 1,6 mm (.062) +/- 0,3 mm
- Typical operating force : 4N +/- 2N
- Low level or mechanical life : 1.000.000 cycles
- Torque : 0,8 Nm max. applied to nut
- Soldering : 320°C max. for 3 sec.

MATERIALS


- Case : thermoplastic UL94-V0
- Actuator : polyamide 6/6
- Bushing/bezel : polyamide 6/6
- Contacts :
 - 4 and 7 : silver, gold plated
 - 2 : silver (screw terminals)
- Multi-wire lead AWG20, section 0,6 mm²
- LED wire : AWG26, section 0,12 mm²
- Lens : polycarbonate
- Terminal seal : epoxy

PANEL CUT-OUT

① Flat seal

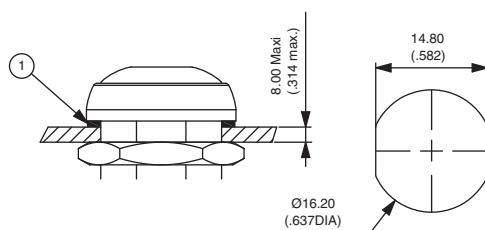

MATRIX MOUNTING

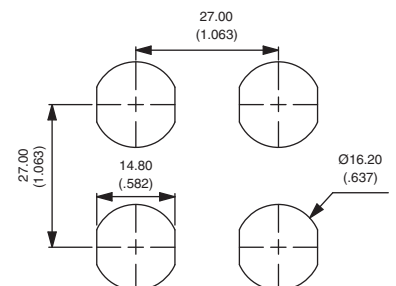


IR series


Sealed pushbutton switches - bushing Ø 16 mm - momentary - standard version

Overview

MODEL
STRUCTURE

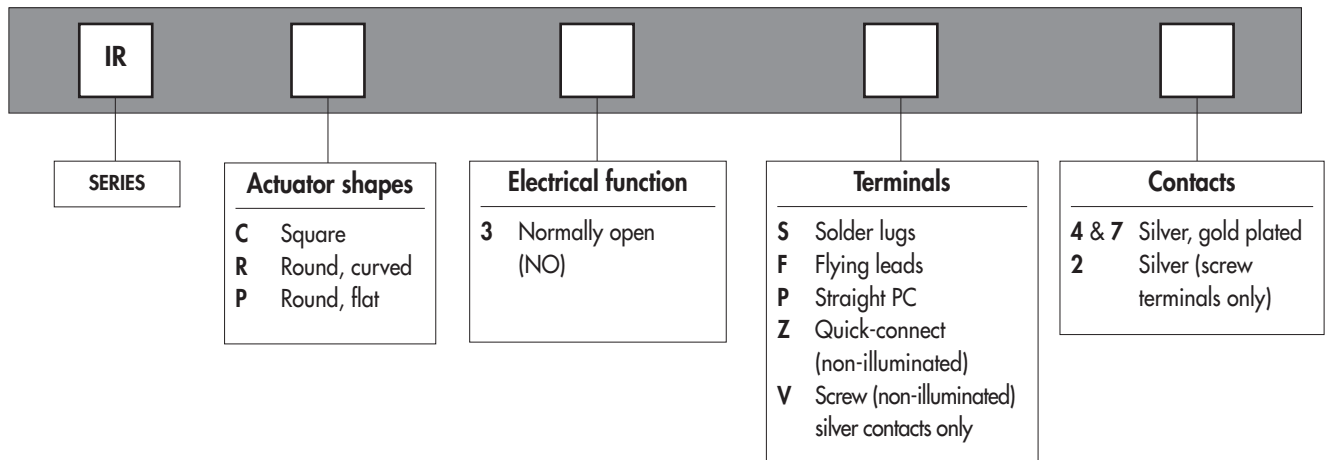

OPTIONS

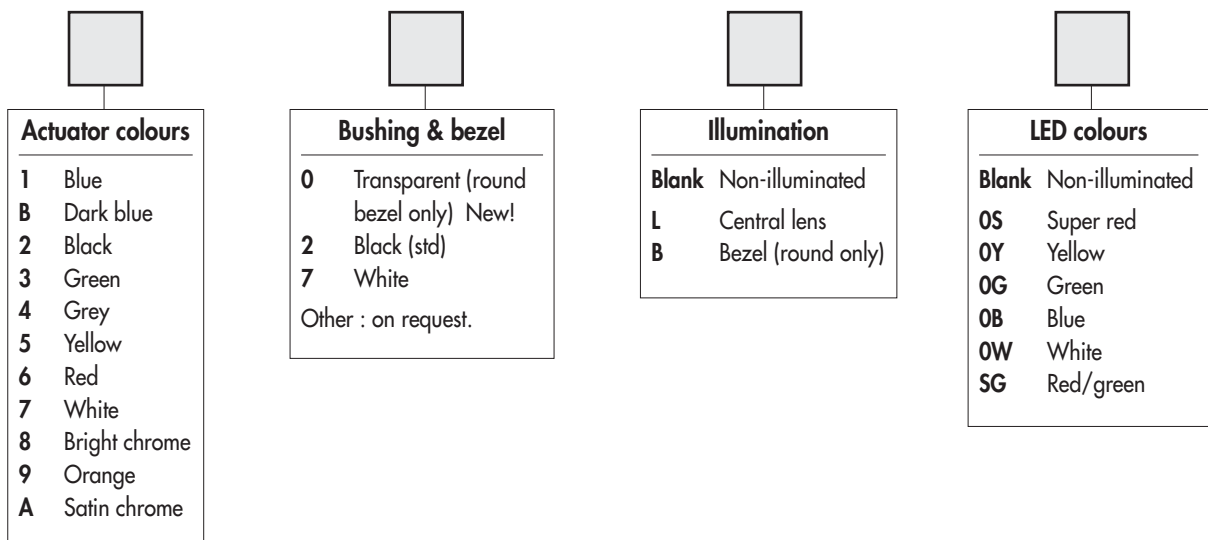

ABOUT THIS SERIES

On the following pages, you will find successively :
model structure of switches and options in the same order as in above chart

Dimensions : first dimensions are in mm while inches are shown as bracketed numbers.




NOTICE : please note that not all combinations of above numbers are available.
Refer to the following pages for further information.



Mounting accessories : Standard hardware supplied : 1 hex nut 19 mm (.748) across flats and 1 flat seal
Hex nut P/N U4116.




Packaging unit : 25 pieces for flying lead models - 40 pieces for other models




Function 3 (NO)

- Five LED colours
 - Tin plated LED terminals
 - Gold plated contacts (4 or 7)
- See electrical specifications.
For high current, replace 4 with 7
in the part numbers below.



MODEL STRUCTURE



Actuator marking available on IRP models (symbol 12 mm max.). On request.

Solder lug terminals

→ Flat



Curved actuator
IRR3S4




Normally Open

Flat actuator
IRP3S4



Normally Open

Also available with straight PC terminals : **IR•3P4**.
LED colour is indicated by the bottom of the switch.

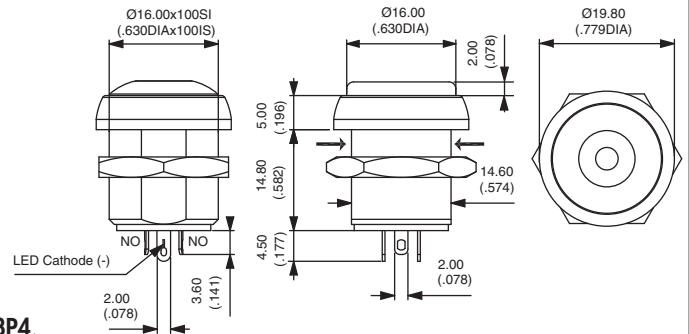

Sealed flying lead terminals

→ Flat



Curved actuator
IRR3F4




Normally Open

Flat actuator
IRP3F4




Normally Open

Wire colours : black : NO contact,
red : LED anode (+), blue : LED cathode (-)

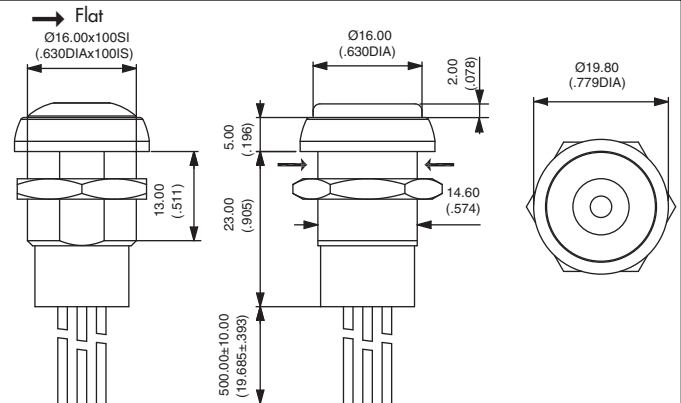

1. ACTUATOR COLOURS




1 : blue - B : dark blue - 2 : black - 3 : green - 4 : grey
5 : yellow - 6 : red - 7 : white - 9 : orange
8 : bright chrome - A : satin chrome

2. BUSHING AND BEZEL




2 : black (standard) - 7 : white
0 : transparent (round bezel only)

3. ILLUMINATION



L : central lens
B : bezel (round only)

4. LED COLOURS




OS : super red - OY : yellow - OG : green - OB : blue
OW : white - SG : red/green

IR series

Sealed pushbutton switches - bushing Ø 16 mm - momentary - standard version


Round - non-illuminated




Function 3 (NO)

- Gold plated contacts (4 or 7)
See electrical specifications.
For high current, replace 4 with 7
in the part numbers below.


Straight P



Quick-connect Z



MODEL STRUCTURE



Actuator marking available on IRP models (symbol 12 mm max.). On request.

Solder lug terminals - gold plated contacts

→ Flat



Curved actuator
IRR3S4




Normally open

Flat actuator
IRP3S4



Normally open

Also available with straight PC terminals :
IR•3P4 and quick-connect terminals : **IR•3Z4**.

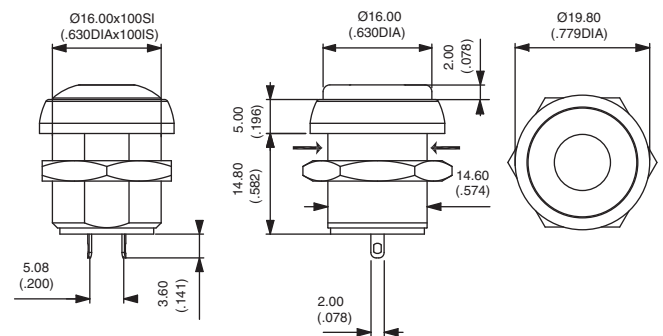

Sealed flying lead terminals - gold plated contacts

→ Flat



Curved actuator
IRR3F4




Normally open

Flat actuator
IRP3F4



Normally open

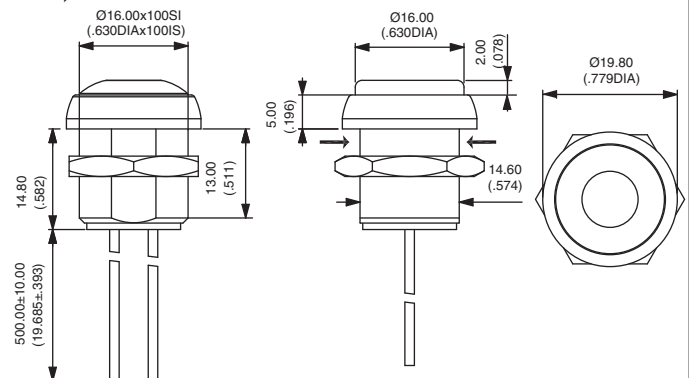

Screw terminals - silver contacts

→ Flat



Curved actuator
IRR3V2




Normally open


Flat actuator
IRP3V2



Normally open

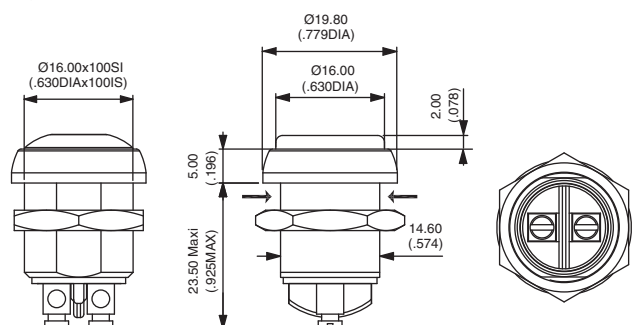


Actuator colour and bushing/bezel : select the desired codes on previous page.




Function 3 (NO)

- Five LED colours
 - Tin plated LED terminals
 - Gold plated contacts (4 or 7)
- See electrical specifications.
For high current, replace 4 with 7
in the part numbers below.



MODEL STRUCTURE



B1

Solder lug terminals




IRC3S4



Normally Open

Also available with straight PC terminals : **IRC3P4**.
LED colour is indicated by the bottom of the switch.

→ Flat

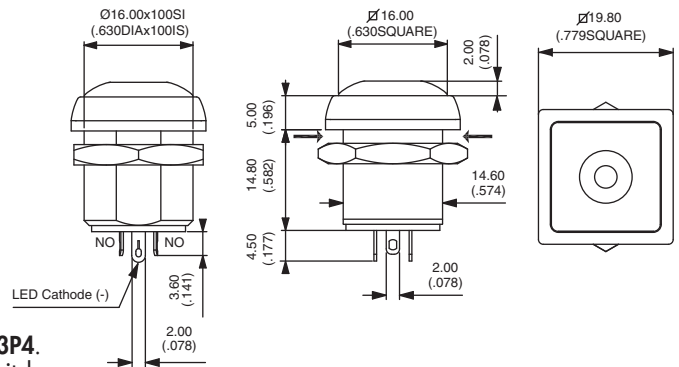

Sealed flying lead terminals




IRC3F4




Normally Open

Wire colours : black : NO contact,
red : LED anode (+), blue : LED cathode (-)

→ Flat

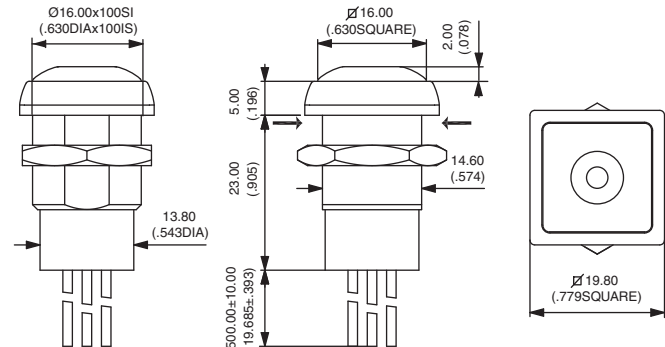

1. ACTUATOR COLOURS




1 : blue - B : dark blue - 2 : black - 3 : green - 4 : grey
5 : yellow - 6 : red - 7 : white - 9 : orange
8 : bright chrome - A : satin chrome

2. BUSHING AND BEZEL




2 : black (standard) - 7 : white

3. ILLUMINATION



L : central lens

4. LED COLOURS




0S : super red - 0Y : yellow - 0G : green - 0B : blue
0W : white - SG : red/green

IR series

Sealed pushbutton switches - bushing Ø 16 mm - momentary - standard version


Square - non-illuminated




Function 3 (NO)

- Gold plated contacts (4 or 7)
See electrical specifications.
For high current, replace 4 with 7
in the part numbers below.


Straight P




Quick-connect Z



MODEL
STRUCTURE



Solder lug terminals - gold plated contacts






IRC3S4



Normally Open

Also available with straight PC terminals :
IRC3P4 or quick-connect terminals : IRC3Z4.

→ Flat



Sealed flying lead terminals - gold plated contacts






IRC3F4



Normally Open

→ Flat

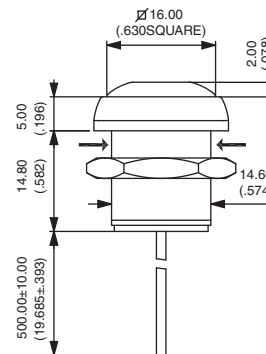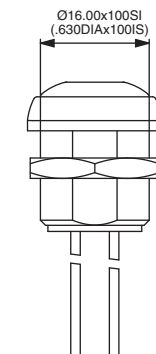

Screw terminals - silver contacts






IRC3V2




Normally Open

→ Flat



Actuator colour and bushing/bezel : select the desired codes on previous page.

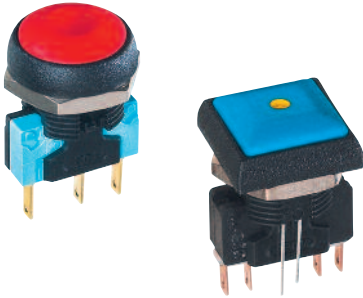

- ☐ Microswitch technology up to 5A
- ☐ Tactile feedback
- ☐ Sealed to IP67
- ☐ Illuminated or non-illuminated
New : illuminated round bezel now available !
- ☐ Flat round actuator for optional marking

ENVIRONMENTAL SPECIFICATIONS

- Front panel sealing : IP67 according to IEC 60529
- Salt spray : IEC 512-6, test 11f
- Operating temperature : -20°C to +85°C

ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load :
5A 250VAC, 50.000 cycles (function 7)
5A 250VAC, 25.000 cycles (function 8)
- Initial contact resistance : 100 mΩ max.
- Insulation resistance : 1 GΩ min. at 500VDC
- Dielectric strength : 750 Vrms between terminals
2.000 Vrms between terminals and frame

LED COMPONENT SPECIFICATIONS

LED colour	Forward current	Typ. forward voltage	Max. forward voltage
Super red (OS)	20mA	2V	2,5V
Yellow (OY)	20mA	2V	2,5V
Green (OG)	10mA	2V	2,5V
Blue (OB)	10mA	3,3V	3,8V

A resistor must be series-connected by the user.
Resistor value = $\frac{\text{supply voltage} - \text{LED forward voltage}}{\text{LED forward current}}$

GENERAL SPECIFICATIONS


- Panel thickness : 3 mm (.118) max.
- Total travel : 1,6 mm (.062) +/- 0,3 mm
- Typical operating force : 4N +/- 2N
- Mechanical life : 1.000.000 cycles
- Torque : 0,8 Nm max. applied to nut
- Soldering : 320°C max. for 3 sec.

MATERIALS


- Case : thermoplastic UL94-V0
- Actuator : polyamide 6/6
- Bushing/bezel : polyamide 6/6
- Contacts : silver
- Lens : polycarbonate

PANEL CUT-OUT

① Flat seal

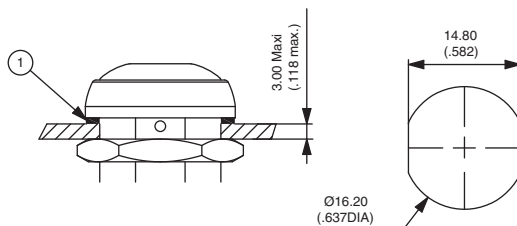


MATRIX MOUNTING

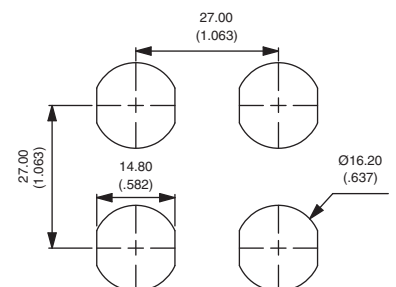

IR series

Sealed pushbutton switches - bushing Ø 16 mm - momentary - microswitch version

Overview

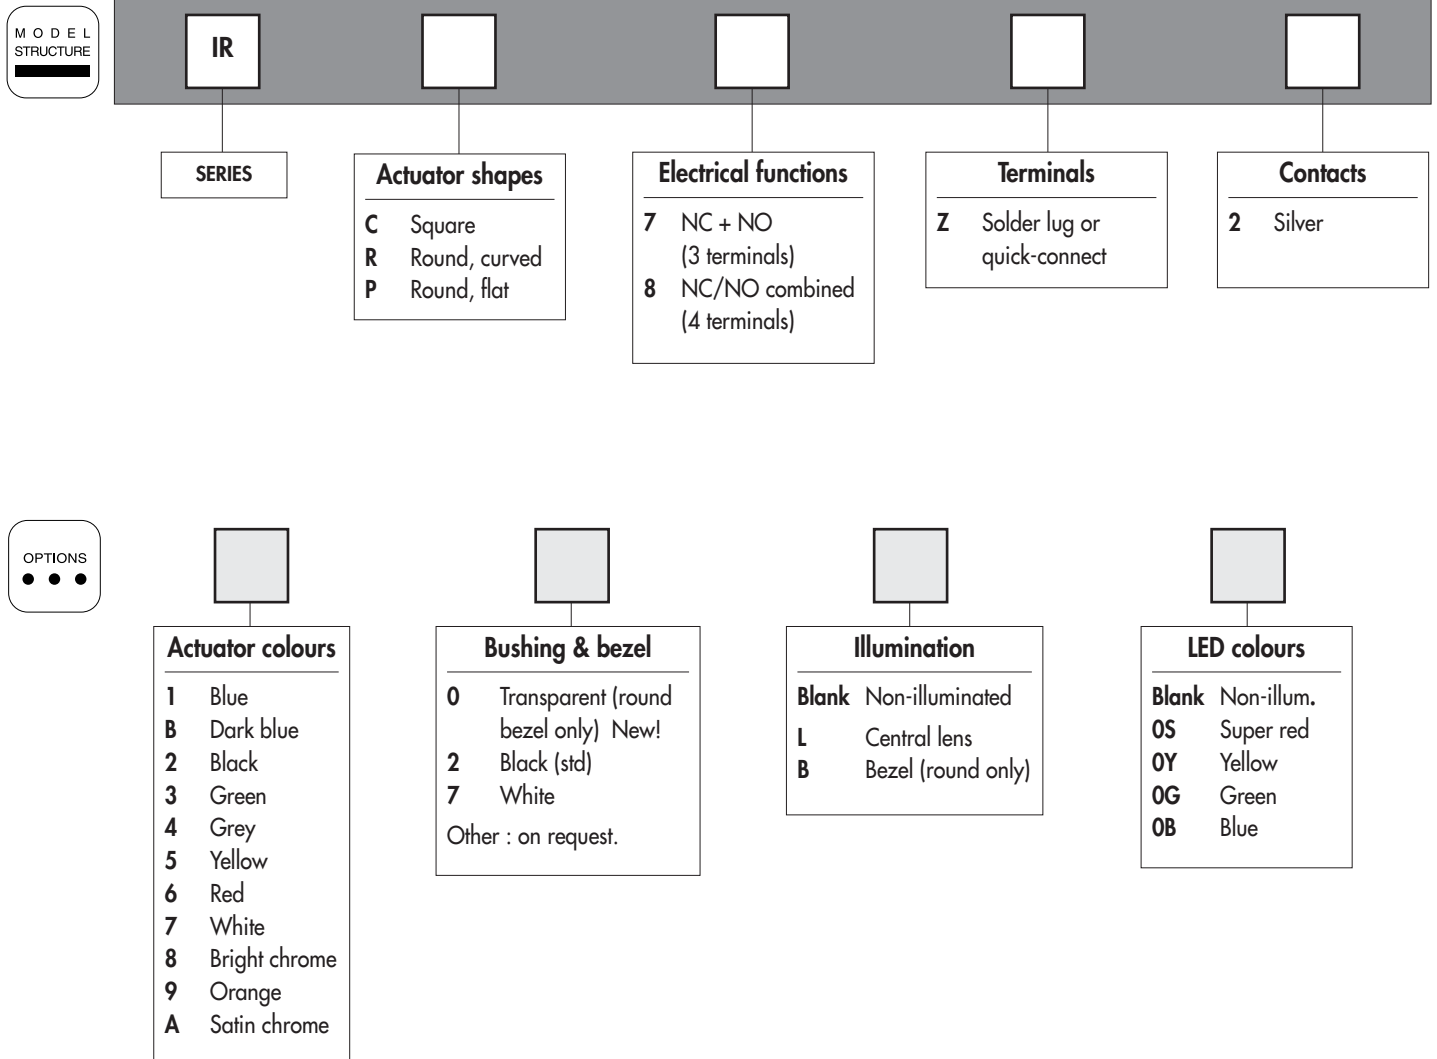

The IR series for high currents is based on a microswitch. Please note that this microswitch is supplied separately.

ABOUT THIS SERIES

On the following pages, you will find successively :
model structure of switches and options in the same order as in above chart

Dimensions : first dimensions are in mm while inches are shown as bracketted numbers.




NOTICE : please note that not all combinations of above numbers are available.
Refer to the following pages for further information.




Mounting accessories : Standard hardware supplied : 1 hex nut 19 mm (.748) across flats and 1 flat seal.
Hex nut P/N : U4116



Packaging unit : 25 pieces for flying lead models - 40 pieces for other models

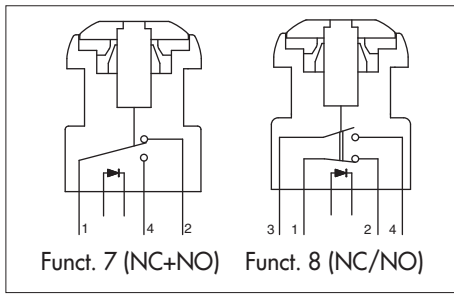


- Four LED colours
- Tin plated LED terminals
- Silver contacts

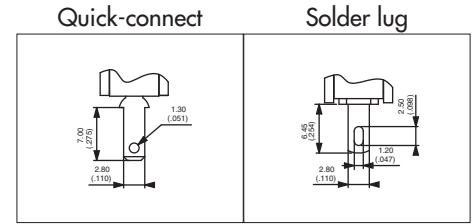

Funct. 7 (3 terminals) Funct. 8 (4 terminals)

MODEL STRUCTURE



Actuator marking available on IRP models (symbol 12 mm max.). On request.

Quick-connect terminals - NC+NO - 3 terminals

→ Flat



Curved actuator
IRR7Z2




NC+NO

Flat actuator
IRP7Z2



NC+NO

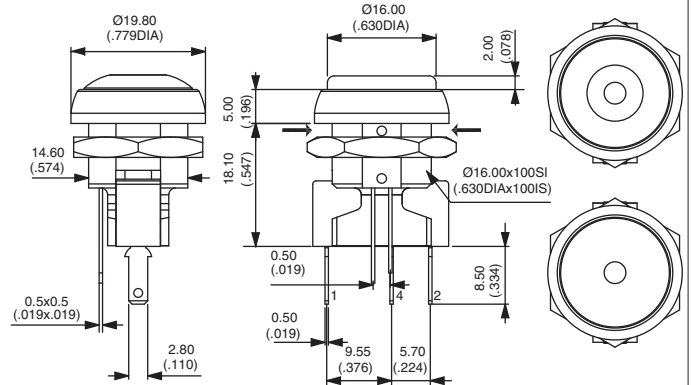

Solder lug terminals - NC/NO - 4 terminals

→ Flat



Curved actuator
IRR8Z2




NC/NO combined

Flat actuator
IRP8Z2




NC/NO combined

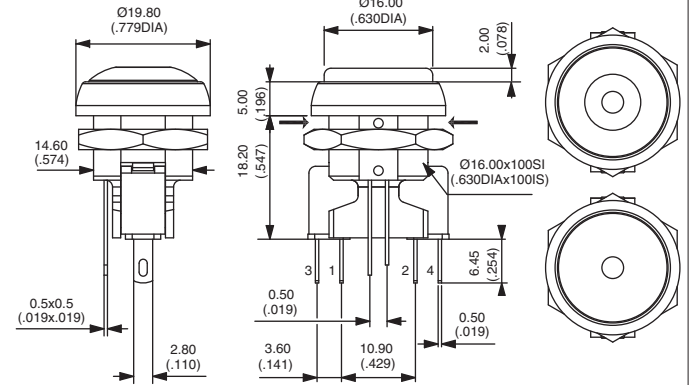

Terminals should be used as solder lugs only.

1. ACTUATOR COLOURS




1 : blue - B : dark blue - 2 : black - 3 : green - 4 : grey
 5 : yellow - 6 : red - 7 : white - 9 : orange
 8 : bright chrome - A : satin chrome

2. BUSHING AND BEZEL




2 : black (standard) - 7 : white
 0 : transparent (round bezel only)

3. ILLUMINATION



L : central lens
 B : bezel (round only)

4. LED COLOURS




0S : super red - 0Y : yellow - 0G : green - 0B : blue


IR series

Sealed pushbutton switches - bushing Ø 16 mm - momentary - microswitch version


Round - non-illuminated

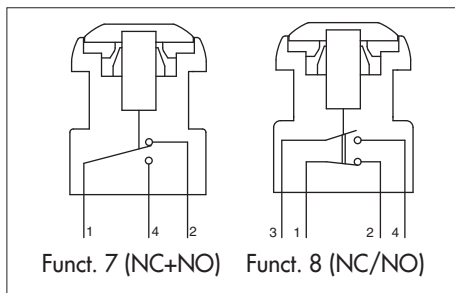

• Silver contacts

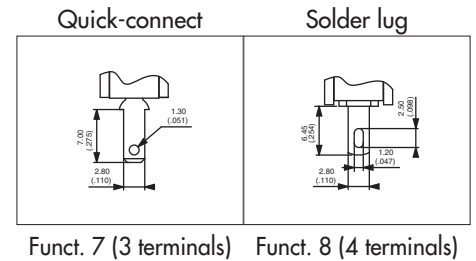

MODEL
STRUCTURE



Actuator marking available on IRP models (symbol 12 mm max.). On request.

Quick-connect terminals - NC+NO - 3 terminals



Curved actuator
IRR7Z2




NC+NO

Flat actuator
IRP7Z2



NC+NO

→ Flat

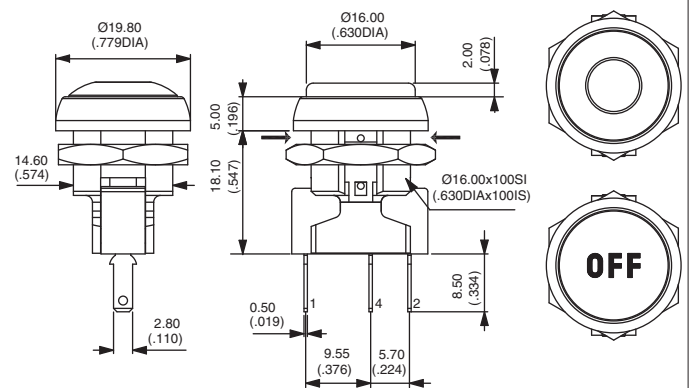

Solder lug terminals - NC/NO - 4 terminals



Curved actuator
IRR8Z2




NC/NO combined

Flat actuator
IRP8Z2



NC/NO combined

→ Flat

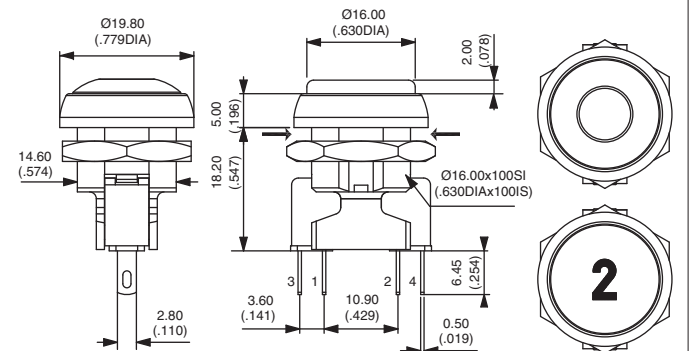

Terminals should be used as solder lugs only.

ACTUATOR COLOURS




1 : blue - B : dark blue - 2 : black - 3 : green - 4 : grey - 5 : yellow - 6 : red - 7 : white - 9 : orange - 8 : bright chrome
A : satin chrome


BUSHING AND BEZEL FINISH




2 : black (standard) - 7 : white

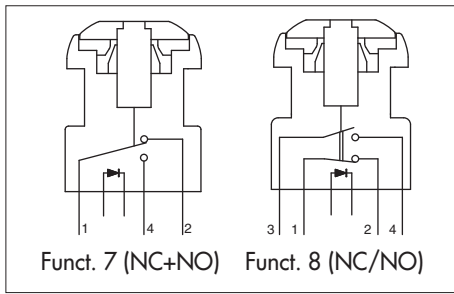

- Four LED colours
- Tin plated LED terminals
- Silver contacts

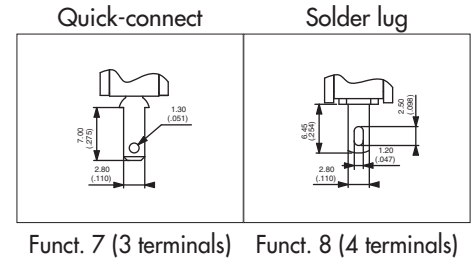

**MODEL
STRUCTURE**



B1

Quick-connect terminals - NC+NO - 3 terminals


→ Flat



IRC7Z2




NC+NO

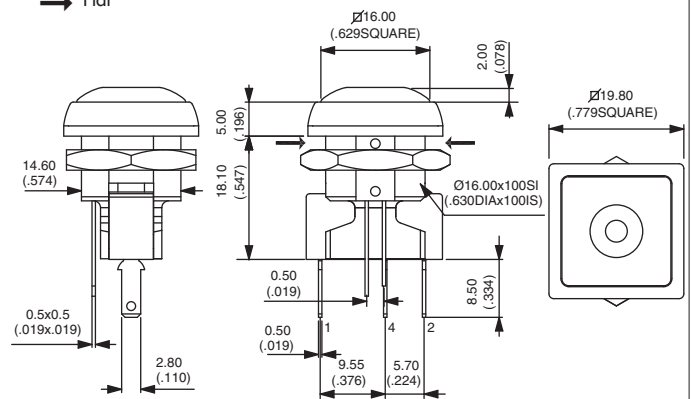

Solder lug terminals - NC/NO - 4 terminals


→ Flat



IRC8Z2




NC/NO combined

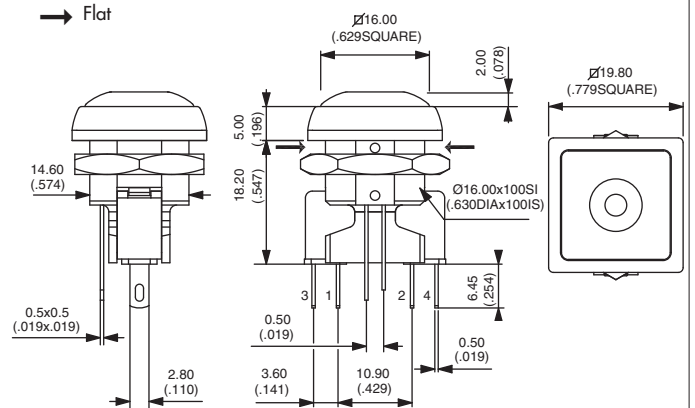

Terminals should be used as solder lugs only.

1. ACTUATOR COLOURS




1 : blue - B : dark blue - 2 : black - 3 : green - 4 : grey
5 : yellow - 6 : red - 7 : white - 9 : orange
8 : bright chrome - A : satin chrome

2. BUSHING AND BEZEL




2 : black (standard) - 7 : white

3. ILLUMINATION



L : central lens

4. LED COLOURS




OS : super red - OY : yellow - OG : green - OB : blue


IR series

Sealed pushbutton switches - bushing Ø 16 mm - momentary - microswitch version


Square - non-illuminated

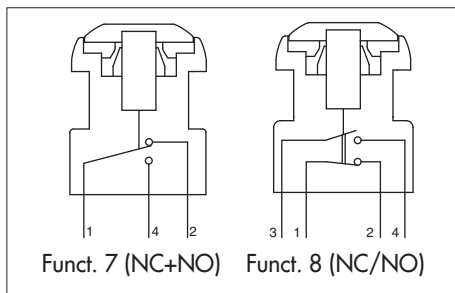

• Silver contacts

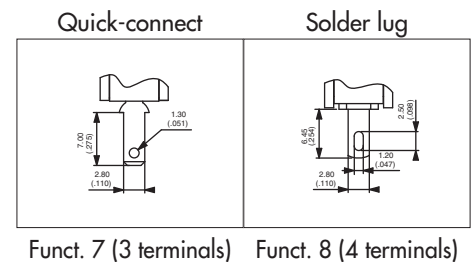

MODEL
STRUCTURE



Funct. 7 (3 terminals) Funct. 8 (4 terminals)

Quick-connect terminals - NC+NO - 3 terminals


→ Flat



IRC7Z2



NC+NO

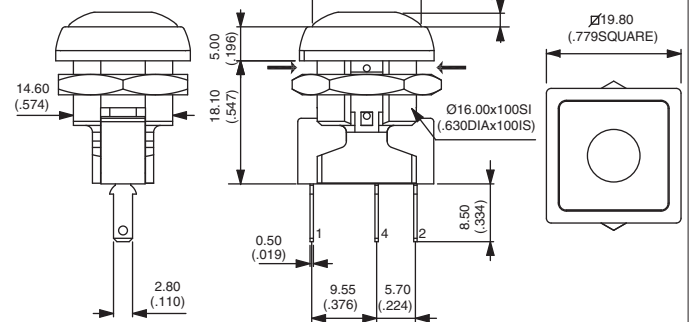

Solder lug terminals - NC/NO - 4 terminals


→ Flat



IRC8Z2



NC/NO combined

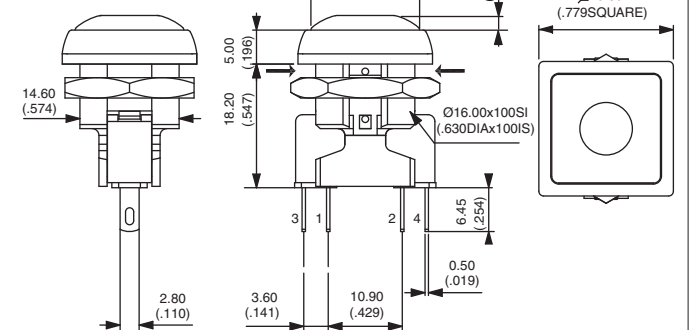

Terminals should be used as solder lugs only.

ACTUATOR COLOURS



1 : blue - B : dark blue - 2 : black - 3 : green - 4 : grey - 5 : yellow - 6 : red - 7 : white - 9 : orange - 8 : bright chrome
A : satin chrome

BUSHING AND BEZEL FINISH



2 : black (standard) - 7 : white

UG1410-A-R1



- ☐ Latching action models
- ☐ Sealed to IP67
- ☐ Illuminated or non-illuminated
New : illuminated round bezel now available !
- ☐ Flat round actuator for optional marking

ENVIRONMENTAL SPECIFICATIONS

- Front panel sealing : IP67 according to IEC 60529
- Shock resistance : 100 g according to IEC 512-4, test 6c
- Vibration resistance : 10-500Hz - 10 g according to IEC 512-4, test 6d
- Salt spray : IEC 512-6, test 11f
- Operating temperature : -40°C to +85°C

ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load (gold plated contacts) :
 - Code 4 : 100mA 24VDC, 200.000 cycles
 - Code 7 : 4A 12VDC, 200.000 cycles
 - 1A 48VDC, 200.000 cycles
 - 3A 48VDC, 75.000 cycles
- Initial contact resistance : 100 mΩ max.
- Insulation resistance : 1 GΩ min. at 500VDC
- Dielectric strength : 1.500 Vrms between terminals

LED COMPONENT SPECIFICATIONS

LED colour	Forward current	Typ. forward voltage	Max. forward voltage
Super red (OS)	20mA	1,95V	1,95V
Yellow (OY)	20mA	2V	2,05V
Green (OG)	20mA	2,1V	2,5V
Blue (OB)	20mA	3,2V	4V

A resistor must be series-connected by the user.

Resistor value = $\frac{\text{supply voltage} - \text{LED forward voltage}}{\text{LED forward current}}$

On flying lead versions, the LED resistor can be integrated by APEM on request.

GENERAL SPECIFICATIONS


- Panel thickness : 8 mm (.314) max.
- Total travel : 2,5 mm (.098) +/- 0,3 mm
- Typical operating force : 5N +/- 2N
- Low level or mechanical life : 200.000 cycles
- Torque : 0,8 Nm max. applied to nut
- Soldering : 320°C max. for 3 sec.

MATERIALS


- Case : thermoplastic UL94-V0
- Plunger : polyamide
- Bushing/bezel : polyamide
- Contacts : silver, gold plated (codes 4 and 7)
- Multi-wire lead AWG20, section 0,6 mm²
- LED wire : AWG26, section 0,12 mm²
- Lens : polycarbonate
- Terminal seal : epoxy

PANEL CUT-OUT

① Flat seal

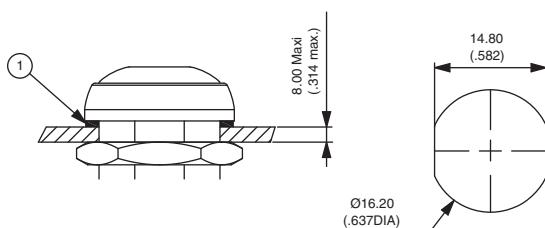


MATRIX MOUNTING

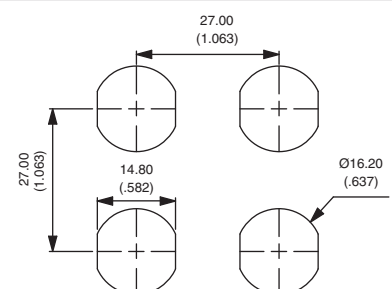

IR series

Sealed pushbutton switches - bushing Ø 16 mm - latching

Overview

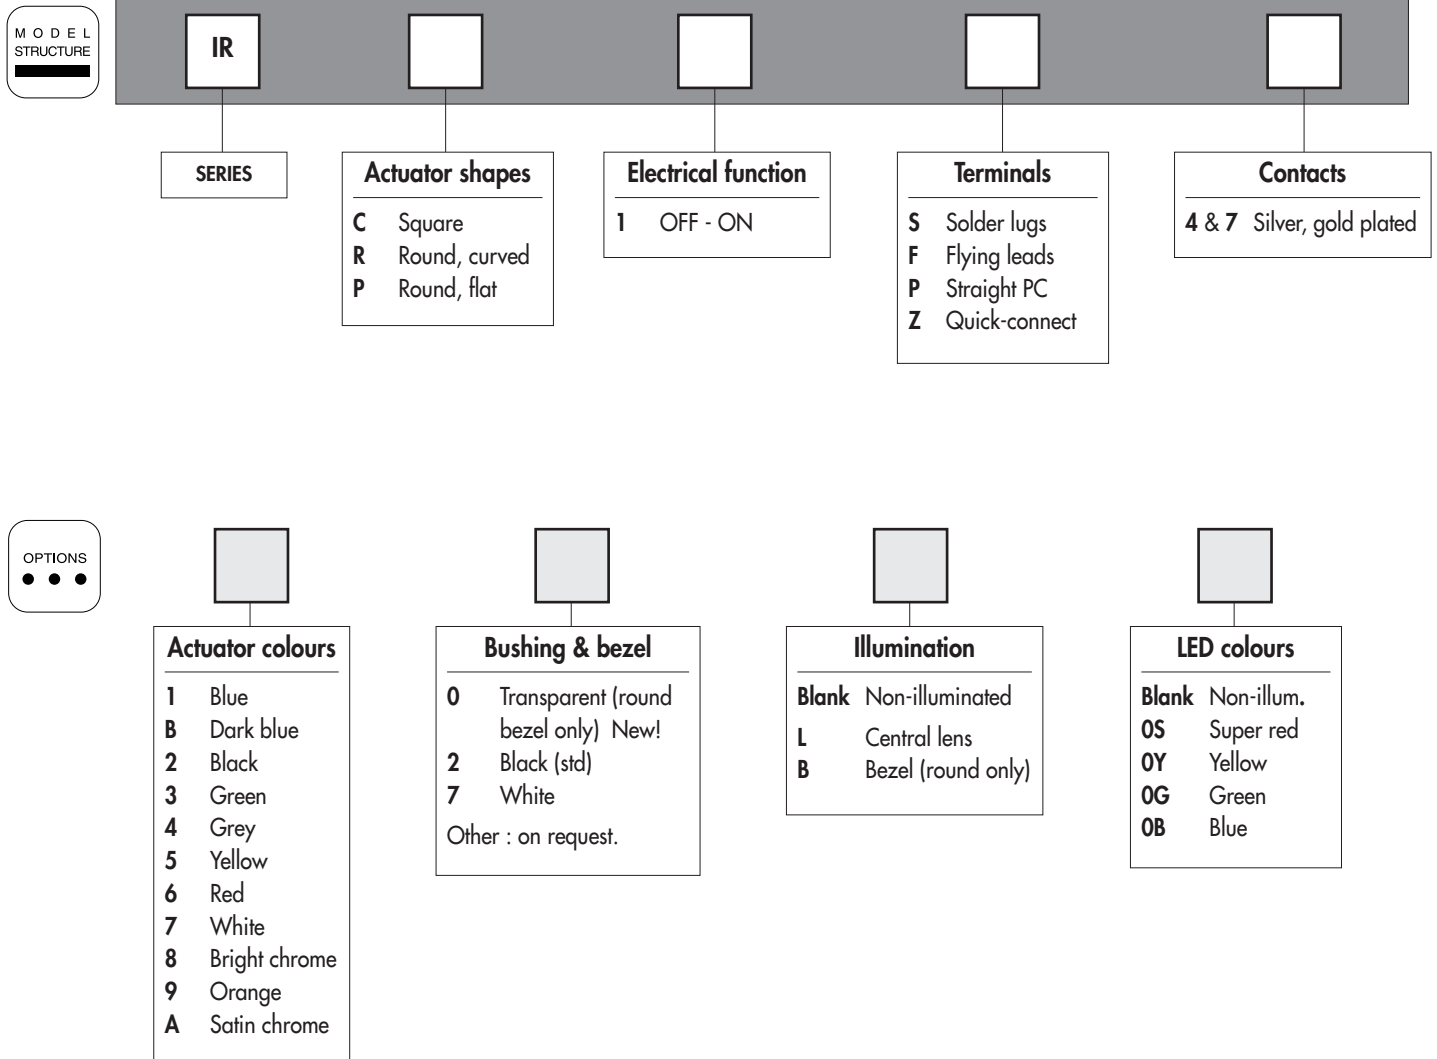

ABOUT THIS SERIES

On the following pages, you will find successively :
model structure of switches and options in the same order as in above chart

Dimensions : first dimensions are in mm while inches are shown as bracketed numbers.



NOTICE : please note that not all combinations of above numbers are available.
Refer to the following pages for further information.



Mounting accessories : Standard hardware supplied : 1 hex nut 19 mm (.748) across flats and 1 flat seal
Hex nut P/N U4116.




Packaging unit : 25 pieces for flying lead models - 40 pieces for other models


IR series

Sealed pushbutton switches - bushing Ø 16 mm - latching


Round - illuminated

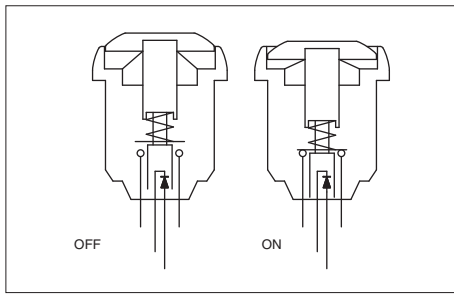

- Four LED colours
 - Tin plated LED terminals
 - Gold plated contacts (4 or 7)
- See electrical specifications.
For high current, replace 4 with 7 in the P/Ns below.

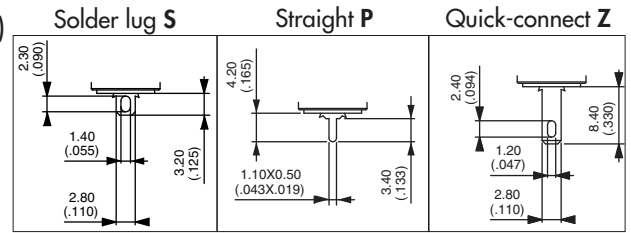

MODEL STRUCTURE



Plunger marking available on IRP models (symbol 12 mm max.). On request.

Solder lug terminals



Curved actuator
IRR1S4


OFF - ON

Flat actuator
IRP1S4

OFF - ON

Also available with straight PC terminals : **IR•1P4**
& quick-connect terminals : **IR•1Z4**.

→ Flat

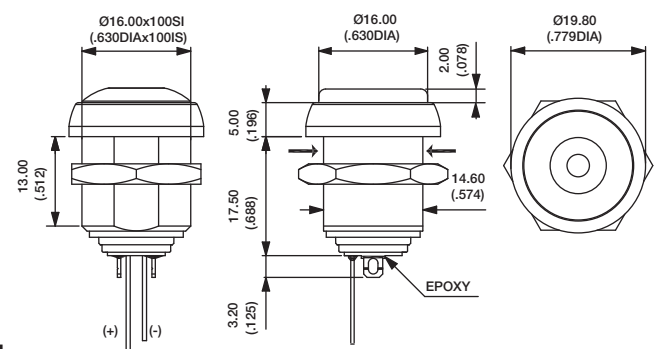

Sealed flying lead terminals



Curved actuator
IRR1F4


OFF - ON

Flat actuator
IRP1F4


OFF - ON

Wire colours : black : contact,
red : LED anode (+), blue : LED cathode (-)

→ Flat

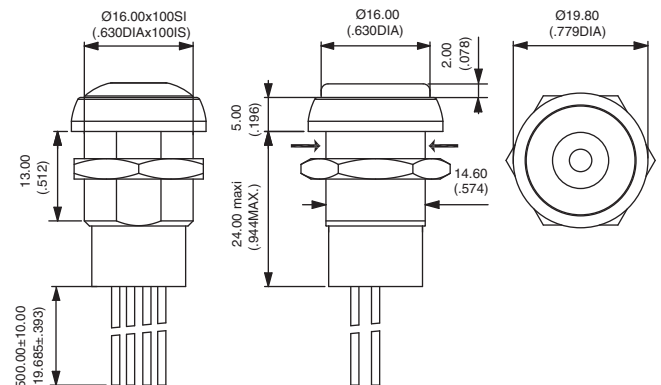

1. ACTUATOR COLOURS




1 : blue - B : dark blue - 2 : black - 3 : green - 4 : grey
5 : yellow - 6 : red - 7 : white - 9 : orange
8 : bright chrome - A : satin chrome

2. BUSHING AND BEZEL




2 : black (standard) - 7 : white
0 : transparent (round bezel only)

3. ILLUMINATION



L : central lens
B : bezel (round only)

4. LED COLOURS




0S : super red - 0Y : yellow - 0G : green - 0B : blue


IR series

Sealed pushbutton switches - bushing Ø 16 mm - latching


Round - non-illuminated

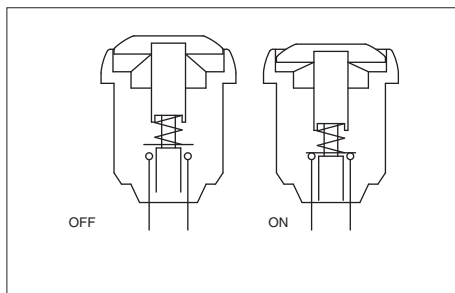

- Gold plated contacts (4 or 7)
See electrical specifications.
For high current, replace 4 with 7 in the P/Ns below.

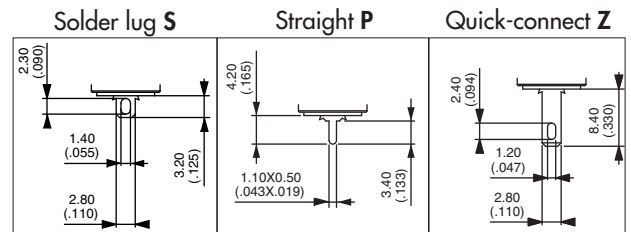

MODEL STRUCTURE



Plunger marking available on IRP models (symbol 12 mm max.). On request.

Solder lug terminals




Curved actuator
IRR1S4

OFF - ON

Flat actuator
IRP1S4

OFF - ON

→ Flat

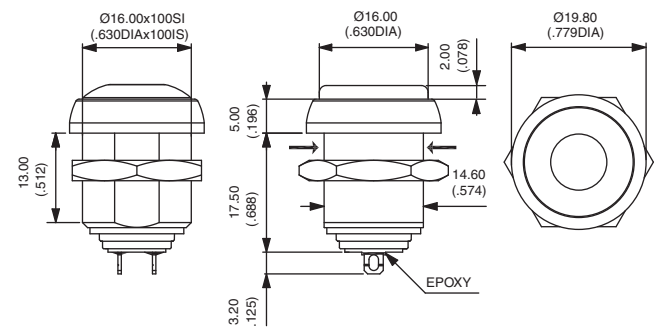

Also available with straight PC terminals : **IR•1P4**
& quick-connect terminals : **IR•1Z4**.

Sealed flying lead terminals




Curved actuator
IRR1F4

OFF - ON

Flat actuator
IRP1F4

OFF - ON

→ Flat

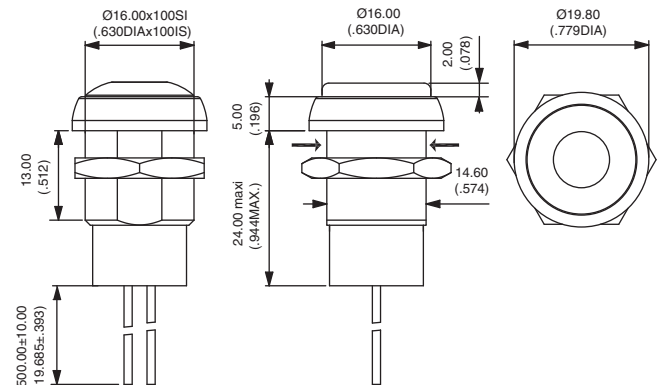

ACTUATOR COLOURS



1 : blue - B : dark blue - 2 : black - 3 : green - 4 : grey - 5 : yellow - 6 : red - 7 : white - 8 : bright chrome - 9 : orange
A : satin chrome

BUSHING AND BEZEL FINISH




2 : black (standard)


IR series

Sealed pushbutton switches - bushing Ø 16 mm - latching


Square - illuminated

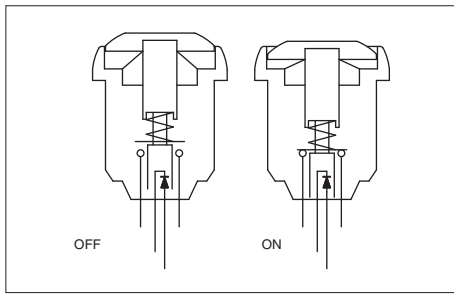

- Four LED colours
 - Tin plated LED terminals
 - Gold plated contacts (4 or 7)
- See electrical specifications.
For high current, replace 4 with 7 in the P/Ns below.

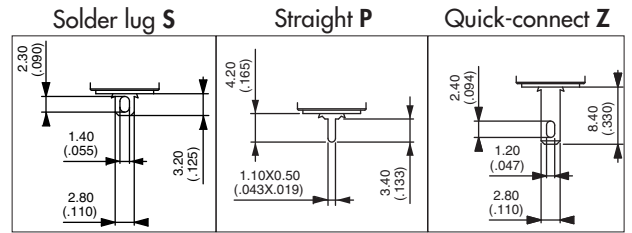

MODEL
STRUCTURE



Solder lug terminals




Curved actuator
IRC1S4

OFF - ON

Also available with straight PC terminals : **IRC1P4**
& quick-connect terminals : **IRC1Z4**.

→ Flat

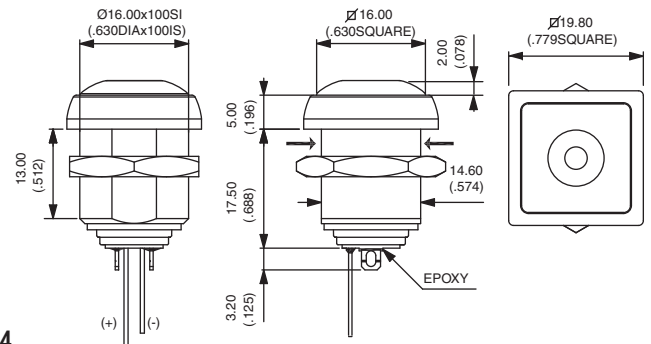

Sealed flying lead terminals




Curved actuator
IRC1F4


OFF - ON

Wire colours : black : contact,
red : LED anode(+), blue : LED cathode (-)

→ Flat

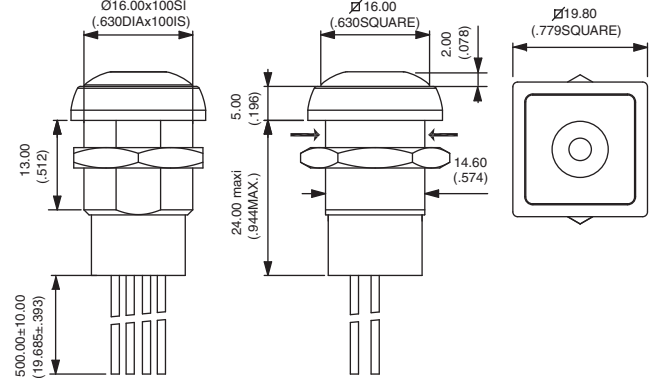

1. ACTUATOR COLOURS




1 : blue - B : dark blue - 2 : black - 3 : green - 4 : grey
5 : yellow - 6 : red - 7 : white - 9 : orange
8 : bright chrome - A : satin chrome

2. BUSHING AND BEZEL




2 : black (standard) - 7 : white

3. ILLUMINATION



L : central lens

4. LED COLOURS




0S : super red - 0Y : yellow - 0G : green - 0B : blue


IR series

Sealed pushbutton switches - bushing Ø 16 mm - latching

Square - non-illuminated

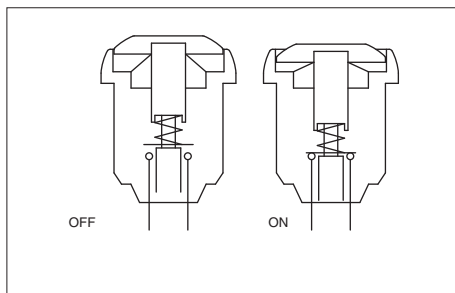

- Gold plated contacts (4 or 7)
See electrical specifications.
For high current, replace 4 with 7 in the P/Ns below.

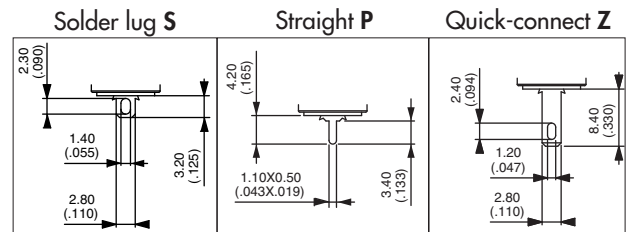


MODEL
STRUCTURE




Solder lug terminals

→ Flat



Curved actuator
IRC154

OFF - ON

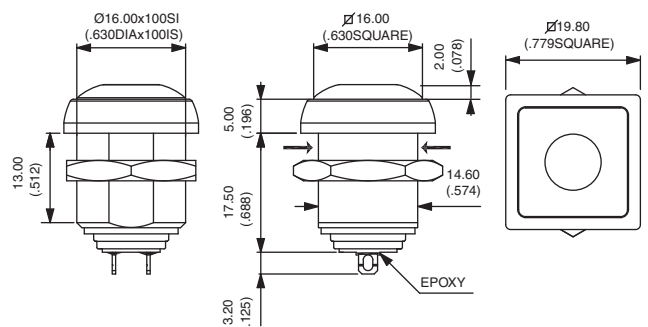

Also available with straight PC terminals : IRC1P4
& quick-connect terminals : IRC1Z4.


Sealed flying lead terminals

→ Flat



Curved actuator
IRC1F4

OFF - ON

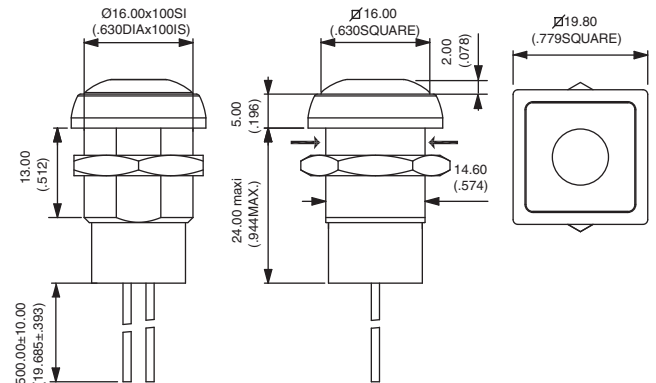

ACTUATOR COLOURS



1 : blue - B : dark blue - 2 : black - 3 : green - 4 : grey - 5 : yellow - 6 : red - 7 : white - 8 : bright chrome - 9 : orange
A : satin chrome

BUSHING AND BEZEL FINISH



2 : black (standard)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Apem:](#)

[IRC8Z222L0S](#) [IRR3F422](#) [IRR3F462](#) [IRR3F462L0B](#) [IRR3V212](#) [IRR3V262](#) [IRR8Z222](#) [IRC7Z222L0S](#)
[IRC7Z262L0S](#) [IRP3F422L0S](#) [IRP7Z262](#) [IRR1S422L0S](#) [IRR3F422000](#) [IRR3F462000](#) [IRR3F4B2](#) [IRR3S422000](#)
[IRR3S422L0S](#) [IRR3V222000](#) [IRR3V262000](#) [IRR7Z232L0G](#) [IRR8Z222000](#) [IRR8Z222L0S](#) [IRR3S422](#) [IRP3F422](#)
[IRR3F472](#)