




(1,27 mm) .050"

ISDF, CC03, TSDF, T1M44 SERIES

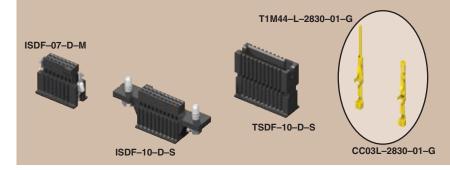

# DISCRETE WIRE HOUSINGS & CONTACTS

#### Mates with: TFM, TFC

# **SPECIFICATIONS**

For complete specifications see www.samtec.com?ISDF

Insulator Material: Black LCP **Contact Material:** 

BeCu

Plating:

Au over 50μ" (1,27 μm) Ni Operating Temp Range: -35°C to +80°C (PVC) -55°C to +125°C (\*Teflon®) Voltage Rating: 275 VAC (PVC) 235 VAC (\*Teflon®) **Wire:** 28 or 30 AWG

RoHS Compliant: Yes


### **HAND TOOLS**


28 to 30 AWG:

CAT-HT-203-2832-11 \*DuPont™ Teflon® is a

registered trademark of the E.İ. du Pont de Nemours and Company or its affiliates.

Note: Some lengths, styles and options are non-standard, non-returnable.

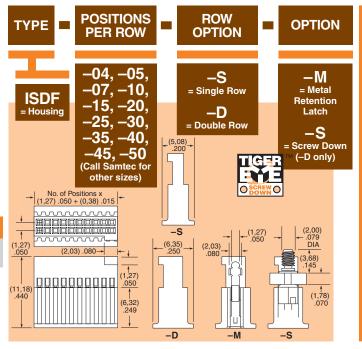

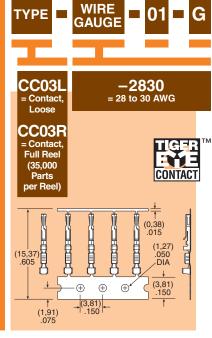

#### Mates with: SFM, SFC

## **SPECIFICATIONS**

For complete specifications see www.samtec.com?TSDF

Insulator Material: Black LCF Contact Material:


Au over 50μ" (1,27 μm) Ni Operating Temp Range: -35°C to +80°C (PVC) -55°C to +125°C (\*Teflon®) Wire: 28 or 30 AWG RoHS Compliant: Yes

## **APPLICATION** SPECIFIC OPTION

- Color coded cable available (\*Teflon® N/A)
- · Other plating available Call Samtec.

\*DuPont™ Teflon® is a registered trademark of the F L du Pont de Nemours and Company or its affiliates.

Note: For wiring option information refer to drawing on web.

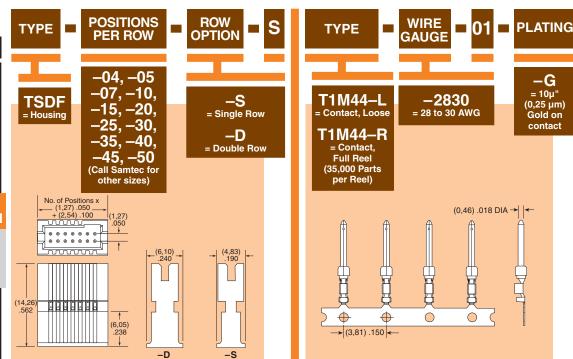

Due to technical progress, all designs, specifications and components are subject to change without notice. I WWW.SAMTEC.COM ■