

ISP817X,ISP827X,ISP847X3,2,1
ISP817,ISP827,ISP847-3,-2,-1



LOW INPUT CURRENT PHOTOTRANSISTOR OPTICALLY COUPLED ISOLATORS

APPROVALS

- UL recognised, File No. E91231
- 'X' SPECIFICATION APPROVALS
 - VDE 0884 in 3 available lead form : -
 - STD
 - G form
 - SMD approved to CECC 00802
- Certified to EN60950 by Nemko - Certificate No. P01102465

DESCRIPTION

The ISP817-3,-2,-1, ISP827-3,-2,-1, ISP847-3,-2,-1 series of optically coupled isolators consist of infrared light emitting diodes and NPN silicon photo transistors in space efficient dual in line plastic packages.


FEATURES

- Options :-
- 10mm lead spread - add G after part no.
- Surface mount - add SM after part no.
- Tape&reel - add SMT&R after part no.
- Low input current $0.5\text{mA } I_F$
- High Current Transfer Ratio (50% min)
- High Isolation Voltage ($5.3\text{kV}_{\text{RMS}}, 7.5\text{kV}_{\text{PK}}$)
- High BV_{CEO} (70V min)
- All electrical parameters 100% tested
- Custom electrical selections available


APPLICATIONS

- Computer terminals
- Industrial systems controllers
- Measuring instruments
- Signal transmission between systems of different potentials and impedances


OPTION SM SURFACE MOUNT






OPTION G







ISP817X3,2,1 ISP817-3,2,1







Dimensions in mm



ISP827X3,2,1 ISP827-3,2,1



ISP847X3,2,1 ISP847-3,2,1

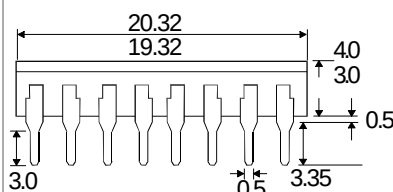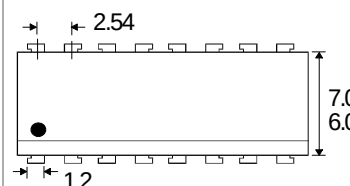

ISOCOM COMPONENTS LTD

Unit 25B, Park View Road West,
Park View Industrial Estate, Brenda Road
Hartlepool, Cleveland, TS25 1YD
Tel: (01429) 863609 Fax : (01429) 863581

ABSOLUTE MAXIMUM RATINGS
(25°C unless otherwise specified)

Storage Temperature _____ -55°C to + 125°C
Operating Temperature _____ -30°C to + 100°C
Lead Soldering Temperature
(1/16 inch (1.6mm) from case for 10 secs) 260°C

INPUT DIODE

Forward Current _____ 50mA
Reverse Voltage _____ 6V
Power Dissipation _____ 70mW

OUTPUT TRANSISTOR

Collector-emitter Voltage BV_{CEO} _____ 70V
Emitter-collector Voltage BV_{ECO} _____ 6V
Collector Current _____ 50mA
Power Dissipation _____ 150mW

POWER DISSIPATION

Total Power Dissipation _____ 200mW
(derate linearly 2.67mW/°C above 25°C)


ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)		1.2	1.4	V	$I_F = 20\text{mA}$
	Reverse Current (I_R)			10	μA	$V_R = 4\text{V}$
Output	Collector-emitter Breakdown (BV_{CEO}) (Note 2)	70			V	$I_C = 1\text{mA}$
	Emitter-collector Breakdown (BV_{ECO})	6			V	$I_E = 10\mu\text{A}$
	Collector-emitter Dark Current (I_{CEO})			100	nA	$V_{CE} = 20\text{V}$
Coupled	Current Transfer Ratio (CTR) (Note 2) ISP817-3, ISP827-3, ISP847-3	70			%	0.5mA I_F , 0.4V V_{CE}
		100			%	1.0mA I_F , 0.4V V_{CE}
	ISP817-2, ISP827-2, ISP847-2	50			%	0.5mA I_F , 0.4V V_{CE}
	ISP817-1, ISP827-1, ISP847-1	50			%	1.0mA I_F , 0.4V V_{CE}
	Collector-emitter Saturation Voltage -3			0.4	V	0.5mA I_F , 0.35mA I_C
	-2			0.4	V	0.5mA I_F , 0.25mA I_C
	-1			0.4	V	1.0mA I_F , 0.5mA I_C
	Input to Output Isolation Voltage V_{ISO}	5300			V_{RMS}	See note 1
		7500			V_{PK}	See note 1
	Input-output Isolation Resistance R_{ISO}	5×10^{10}			Ω	$V_{IO} = 500\text{V}$ (note 1)
	Output Rise Time t_r		4	18	μs	$V_{CE} = 2\text{V}$,
	Output Fall Time t_f		3	18	μs	$I_C = 2\text{mA}$, $R_L = 100\Omega$


Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.


Collector Power Dissipation vs. Ambient Temperature

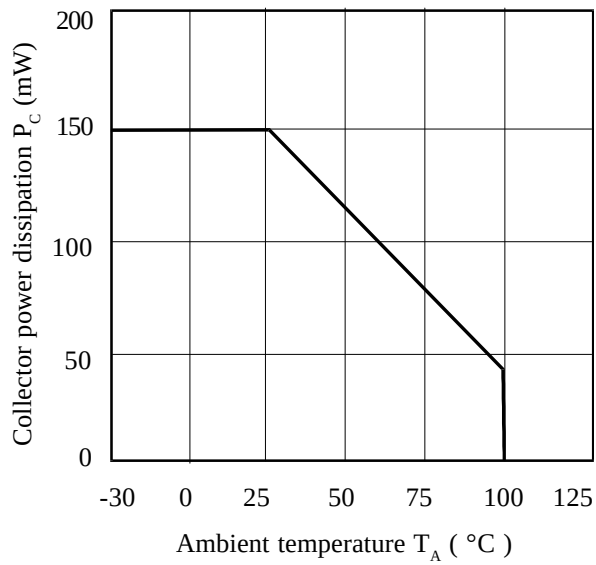


Collector Current vs. Low Collector-emitter Voltage

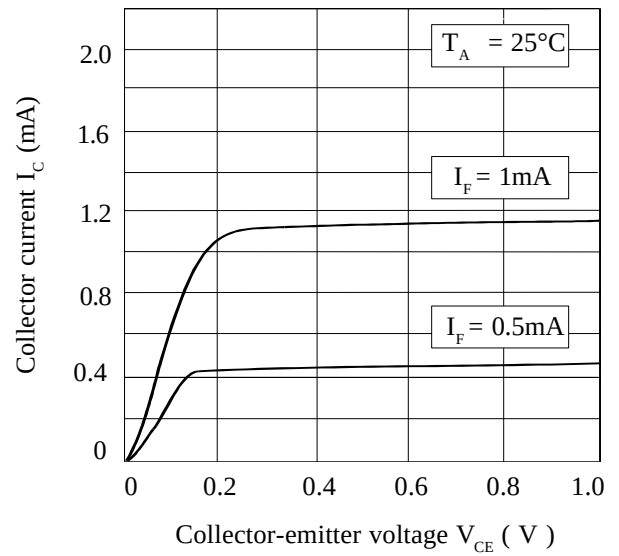


Forward Current vs. Ambient Temperature

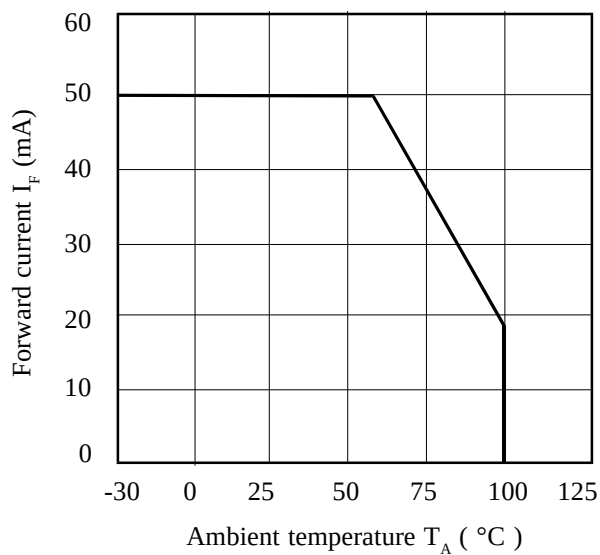

Relative Current Transfer Ratio vs. Ambient Temperature

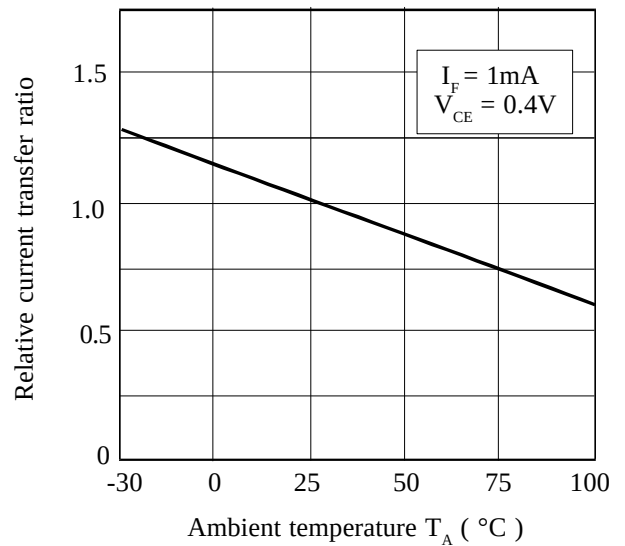

Collector-emitter Saturation Voltage vs. Ambient Temperature

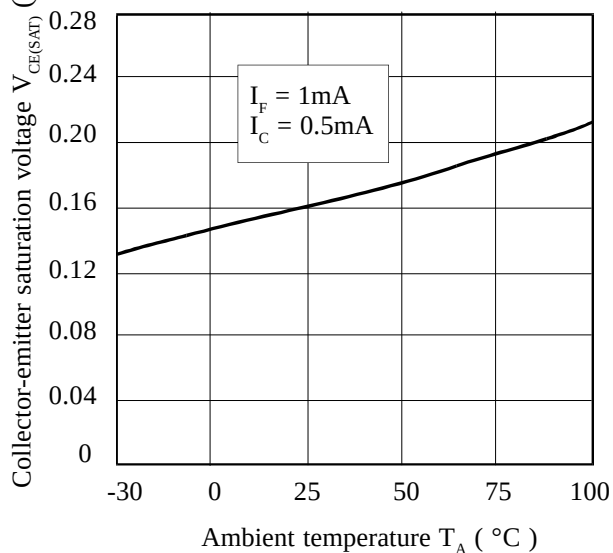

Current Transfer Ratio vs. Forward Current

