


## IGBT with optional Diode



**IXDP 35N60 B**  
**IXDH 35N60 B**  
**IXDH 35N60 BD1**

**$V_{CES} = 600 \text{ V}$**   
 **$I_{C25} = 60 \text{ A}$**   
 **$V_{CE(sat) \text{ typ}} = 2.1 \text{ V}$**

High Speed,  
Low Saturation Voltage



IXDH 35N60 B IXDH 35N60 BD1  
IXDP 35N60 B

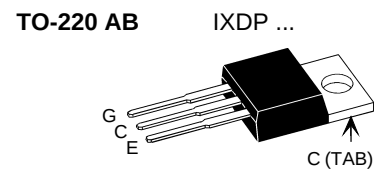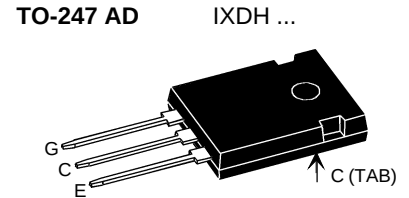

G = Gate,  
C = Collector , E = Emitter  
TAB = Collector

| Symbol                                                                          | Conditions                                                                                                            | Maximum Ratings                       |                                    |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|---------------------------------------|------------------------------------|
| $V_{CES}$                                                                       | $T_J = 25^\circ\text{C to } 150^\circ\text{C}$                                                                        | 600                                   | V                                  |
| $V_{CGR}$                                                                       | $T_J = 25^\circ\text{C to } 150^\circ\text{C}; R_{GE} = 20 \text{ k}\Omega$                                           | 600                                   | V                                  |
| $V_{GES}$                                                                       | Continuous                                                                                                            | $\pm 20$                              | V                                  |
| $V_{GEM}$                                                                       | Transient                                                                                                             | $\pm 30$                              | V                                  |
| $I_{C25}$                                                                       | $T_C = 25^\circ\text{C}$                                                                                              | 60                                    | A                                  |
| $I_{C90}$                                                                       | $T_C = 90^\circ\text{C}$                                                                                              | 35                                    | A                                  |
| $I_{CM}$                                                                        | $T_C = 90^\circ\text{C}, t_p = 1 \text{ ms}$                                                                          | 70                                    | A                                  |
| <b>RBSOA</b>                                                                    | $V_{GE} = \pm 15 \text{ V}, T_J = 125^\circ\text{C}, R_G = 10 \Omega$<br>Clamped inductive load, $L = 30 \mu\text{H}$ | $I_{CM} = 110$<br>$V_{CEK} < V_{CES}$ | A                                  |
| <b><math>t_{SC}</math><br/>(SCSOA)</b>                                          | $V_{GE} = \pm 15 \text{ V}, V_{CE} = 600 \text{ V}, T_J = 125^\circ\text{C}$<br>$R_G = 10 \Omega$ , non repetitive    | 10                                    | $\mu\text{s}$                      |
| <b><math>P_C</math></b>                                                         | $T_C = 25^\circ\text{C}$                                                                                              | IGBT<br>Diode                         | 250<br>80<br>W<br>W                |
| <b><math>T_J</math></b>                                                         |                                                                                                                       | -55 ... +150                          | $^\circ\text{C}$                   |
| <b><math>T_{stg}</math></b>                                                     |                                                                                                                       | -55 ... +150                          | $^\circ\text{C}$                   |
| Maximum lead temperature for soldering<br>1.6 mm (0.062 in.) from case for 10 s |                                                                                                                       | 300                                   | $^\circ\text{C}$                   |
| <b><math>M_d</math></b>                                                         | Mounting torque                                                                                                       | TO-220<br>TO-247                      | 0.4 - 0.6<br>0.8 - 1.2<br>Nm<br>Nm |
| <b>Weight</b>                                                                   |                                                                                                                       | 6                                     | g                                  |

### Features

- NPT IGBT technology
- low switching losses
- low tail current
- no latch up
- short circuit capability
- positive temperature coefficient for easy paralleling
- MOS input, voltage controlled
- optional ultra fast diode
- International standard package

### Advantages

- Space savings
- High power density


### Typical Applications

- AC motor speed control
- DC servo and robot drives
- DC choppers
- Uninterruptible power supplies (UPS)
- Switch-mode and resonant-mode power supplies


| Symbol        | Conditions                                                                  | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |                      |
|---------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|----------------------|
|               |                                                                             | min.                                                                              | typ. | max.                 |
| $V_{(BR)CES}$ | $V_{GE} = 0 \text{ V}$                                                      | 600                                                                               |      | V                    |
| $V_{GE(th)}$  | $I_C = 0.7 \text{ mA}, V_{CE} = V_{GE}$                                     | 3                                                                                 |      | 5 V                  |
| $I_{CES}$     | $V_{CE} = V_{CES}$<br>$T_J = 25^\circ\text{C}$<br>$T_J = 125^\circ\text{C}$ |                                                                                   | 1    | 0.1 mA<br>mA         |
| $I_{GES}$     | $V_{CE} = 0 \text{ V}, V_{GE} = \pm 20 \text{ V}$                           |                                                                                   |      | $\pm 500 \text{ nA}$ |
| $V_{CE(sat)}$ | $I_C = 35 \text{ A}, V_{GE} = 15 \text{ V}$                                 |                                                                                   | 2.2  | 2.7 V                |

| Symbol       | Conditions                                                                                                                                                 | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |         |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|---------|
|              |                                                                                                                                                            | min.                                                                              | typ. | max.    |
| $C_{ies}$    | $V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$                                                                                              |                                                                                   | 1600 | pF      |
| $C_{oes}$    |                                                                                                                                                            |                                                                                   | 150  | pF      |
| $C_{res}$    |                                                                                                                                                            |                                                                                   | 90   | pF      |
| $Q_g$        | $I_C = 35\text{ A}, V_{GE} = 15\text{ V}, V_{CE} = 480\text{ V}$                                                                                           |                                                                                   | 120  | nC      |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 125^\circ\text{C}</math></b><br>$I_C = 35\text{ A}, V_{GE} = \pm 15\text{ V},$<br>$V_{CE} = 300\text{ V}, R_G = 10\ \Omega$ |                                                                                   | 30   | ns      |
| $t_r$        |                                                                                                                                                            |                                                                                   | 45   | ns      |
| $t_{d(off)}$ |                                                                                                                                                            |                                                                                   | 320  | ns      |
| $t_f$        |                                                                                                                                                            |                                                                                   | 70   | ns      |
| $E_{on}$     |                                                                                                                                                            |                                                                                   | 1.6  | mJ      |
| $E_{off}$    |                                                                                                                                                            |                                                                                   | 0.8  | mJ      |
| $R_{thJC}$   |                                                                                                                                                            |                                                                                   |      | 0.5 K/W |
| $R_{thCH}$   | TO 247 Package with heatsink compound                                                                                                                      |                                                                                   | 0.25 | K/W     |
| $R_{thCH}$   | TO 220 Package with heatsink compound                                                                                                                      |                                                                                   | 0.5  | K/W     |

| Reverse Diode (FRED) [D1 version only] |                                                                                                 | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |         |
|----------------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|---------|
| Symbol                                 | Conditions                                                                                      | min.                                                                              | typ. | max.    |
| $V_F$                                  | $I_F = 35\text{ A}, V_{GE} = 0\text{ V}$                                                        |                                                                                   | 2.1  | 2.4 V   |
|                                        | $I_F = 35\text{ A}, V_{GE} = 0\text{ V}, T_J = 125^\circ\text{C}$                               |                                                                                   | 1.6  | V       |
| $I_F$                                  | $T_C = 25^\circ\text{C}$                                                                        |                                                                                   |      | 45 A    |
|                                        | $T_C = 90^\circ\text{C}$                                                                        |                                                                                   |      | 25 A    |
| $I_{RM}$                               | $I_F = 15\text{ A}, -di_F/dt = 400\text{ A}/\mu\text{s}, V_R = 300\text{ V}$                    |                                                                                   | 13   | A       |
| $t_{rr}$                               | $V_{GE} = 0\text{ V}, T_J = 125^\circ\text{C}$                                                  |                                                                                   | 90   | ns      |
| $t_{rr}$                               | $I_F = 1\text{ A}, -di_F/dt = 100\text{ A}/\mu\text{s}, V_R = 30\text{ V}, V_{GE} = 0\text{ V}$ |                                                                                   | 40   | ns      |
| $R_{thJC}$                             |                                                                                                 |                                                                                   |      | 1.6 K/W |

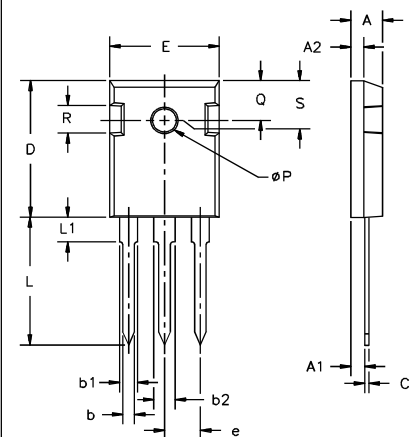**TO-247 AD Outline**


| Dim.           | Millimeter |       | Inches |       |
|----------------|------------|-------|--------|-------|
|                | Min.       | Max.  | Min.   | Max.  |
| A              | 4.7        | 5.3   | .185   | .209  |
| A <sub>1</sub> | 2.2        | 2.54  | .087   | .102  |
| A <sub>2</sub> | 2.2        | 2.6   | .059   | .098  |
| b              | 1.0        | 1.4   | .040   | .055  |
| b <sub>1</sub> | 1.65       | 2.13  | .065   | .084  |
| b <sub>2</sub> | 2.87       | 3.12  | .113   | .123  |
| C              | .4         | .8    | .016   | .031  |
| D              | 20.80      | 21.46 | .819   | .845  |
| E              | 15.75      | 16.26 | .610   | .640  |
| e              | 5.20       | 5.72  | 0.205  | 0.225 |
| L              | 19.81      | 20.32 | .780   | .800  |
| L1             |            | 4.50  |        | .177  |
| phi P          | 3.55       | 3.65  | .140   | .144  |
| Q              | 5.89       | 6.40  | 0.232  | 0.252 |
| R              | 4.32       | 5.49  | .170   | .216  |
| S              | 6.15       | BSC   | 242    | BSC   |

**TO-220 AB Outline**


| Dim. | Millimeter |       | Inches |       |
|------|------------|-------|--------|-------|
|      | Min.       | Max.  | Min.   | Max.  |
| A    | 12.70      | 13.97 | 0.500  | 0.550 |
| B    | 14.73      | 16.00 | 0.580  | 0.630 |
| C    | 9.91       | 10.66 | 0.390  | 0.420 |
| D    | 3.54       | 4.08  | 0.139  | 0.161 |
| E    | 5.85       | 6.85  | 0.230  | 0.270 |
| F    | 2.54       | 3.18  | 0.100  | 0.125 |
| G    | 1.15       | 1.65  | 0.045  | 0.065 |
| H    | 2.79       | 5.84  | 0.110  | 0.230 |
| J    | 0.64       | 1.01  | 0.025  | 0.040 |
| K    | 2.54       | BSC   | 0.100  | BSC   |
| M    | 4.32       | 4.82  | 0.170  | 0.190 |
| N    | 1.14       | 1.39  | 0.045  | 0.055 |
| Q    | 0.35       | 0.56  | 0.014  | 0.022 |
| R    | 2.29       | 2.79  | 0.090  | 0.110 |

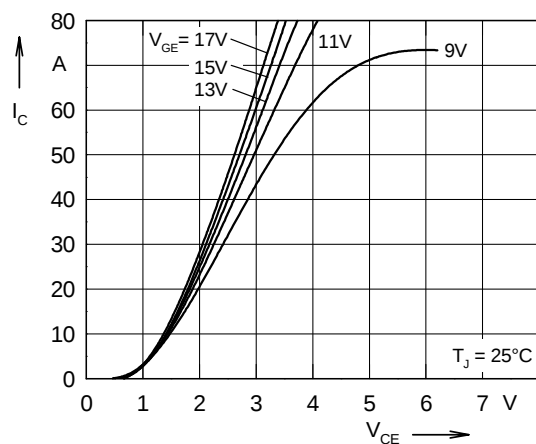


Fig. 1 Typ. output characteristics

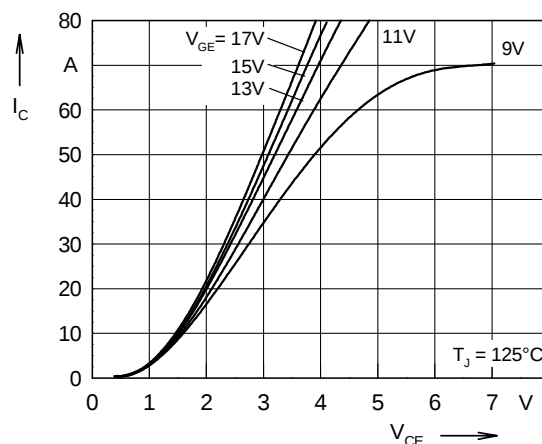


Fig. 2 Typ. output characteristics

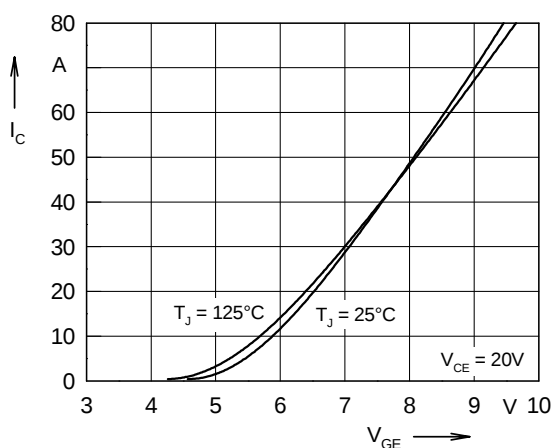


Fig. 3 Typ. transfer characteristics

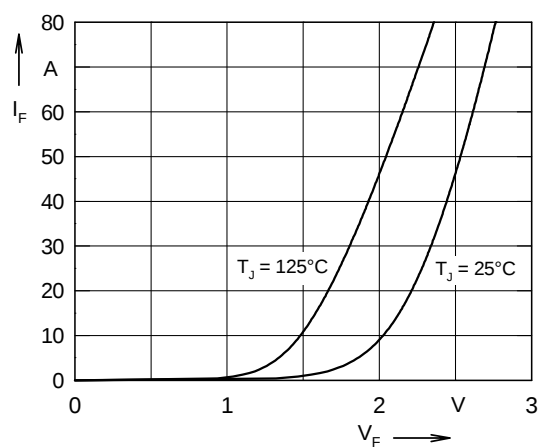


Fig. 4 Typ. forward characteristics of free wheeling diode

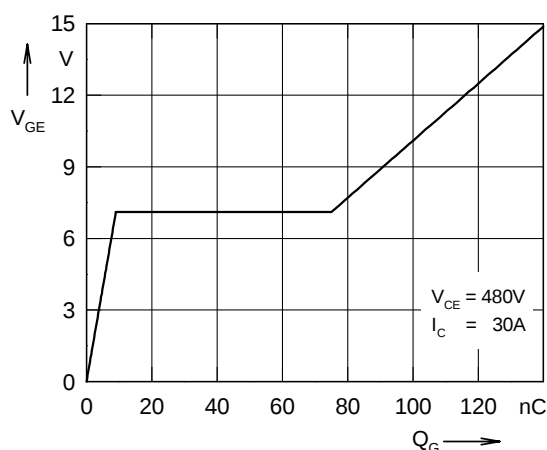


Fig. 5 Typ. turn on gate charge

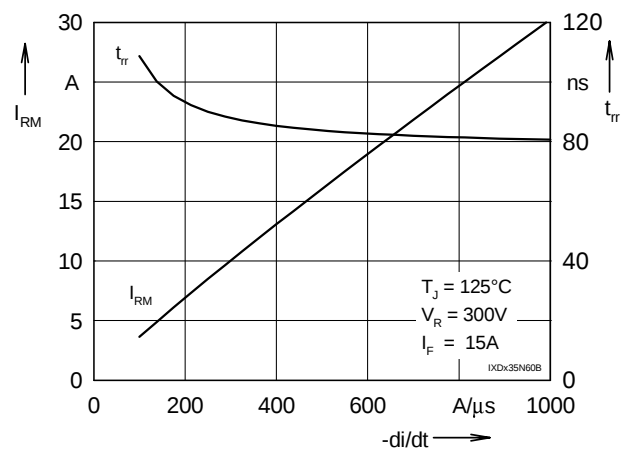


Fig. 6 Typ. turn off characteristics of free wheeling diode

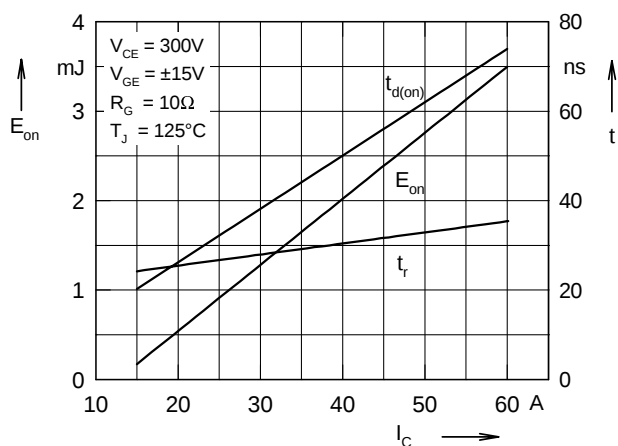


Fig. 7 Typ. turn on energy and switching times versus collector current

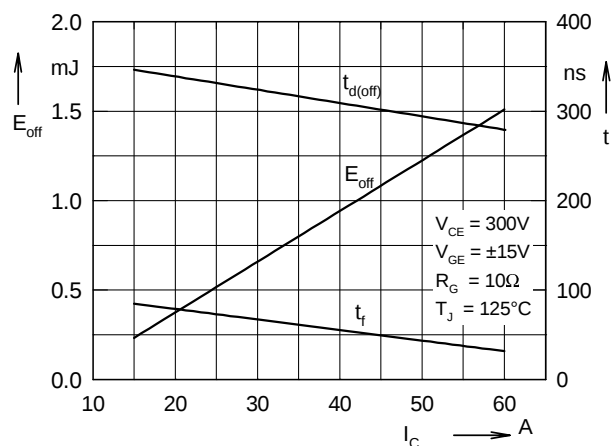


Fig. 8 Typ. turn off energy and switching times versus collector current

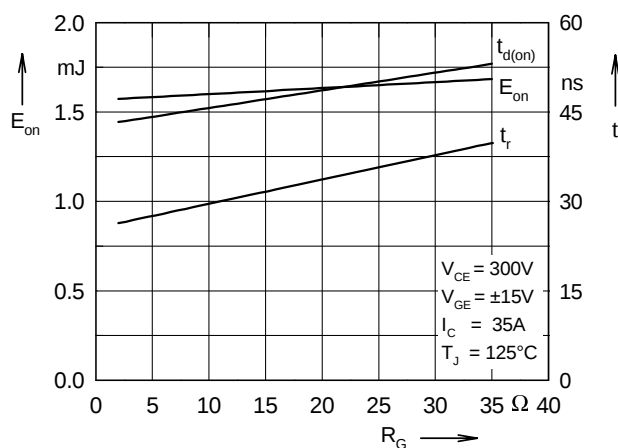


Fig. 9 Typ. turn on energy and switching times versus gate resistor

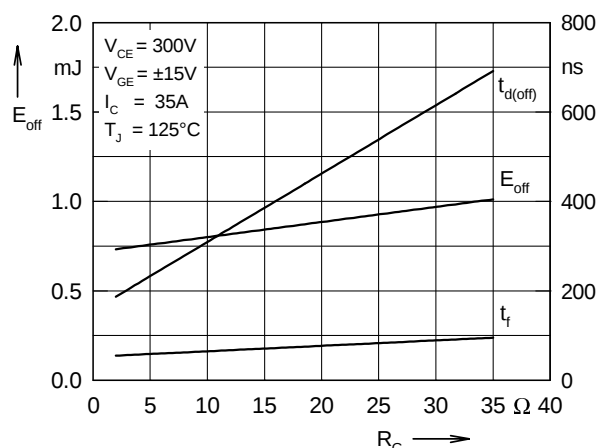


Fig. 10 Typ. turn off energy and switching times versus gate resistor

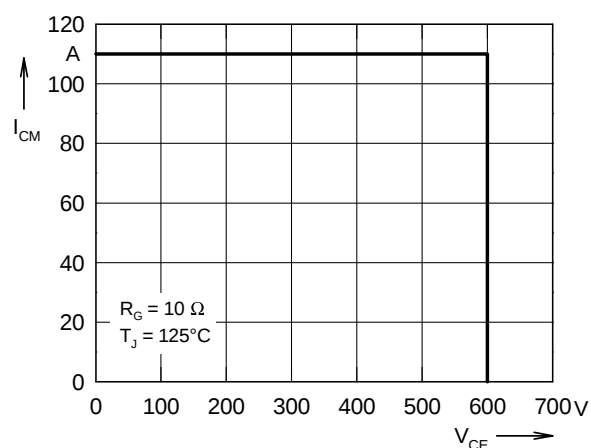


Fig. 11 Reverse biased safe operating area RBSOA

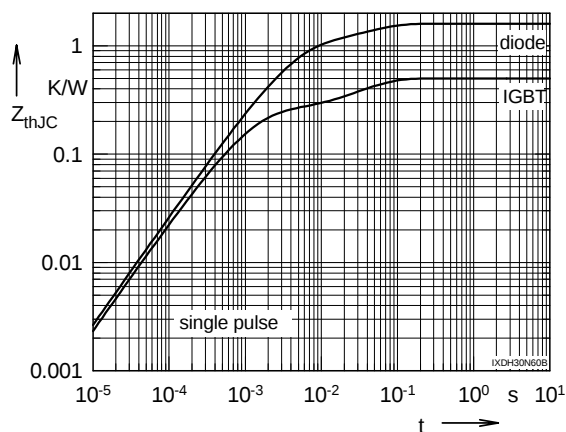


Fig. 12 Typ. transient thermal impedance

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[IXDH35N60B](#) [IXDH35N60BD1](#) [IXDP35N60B](#)