


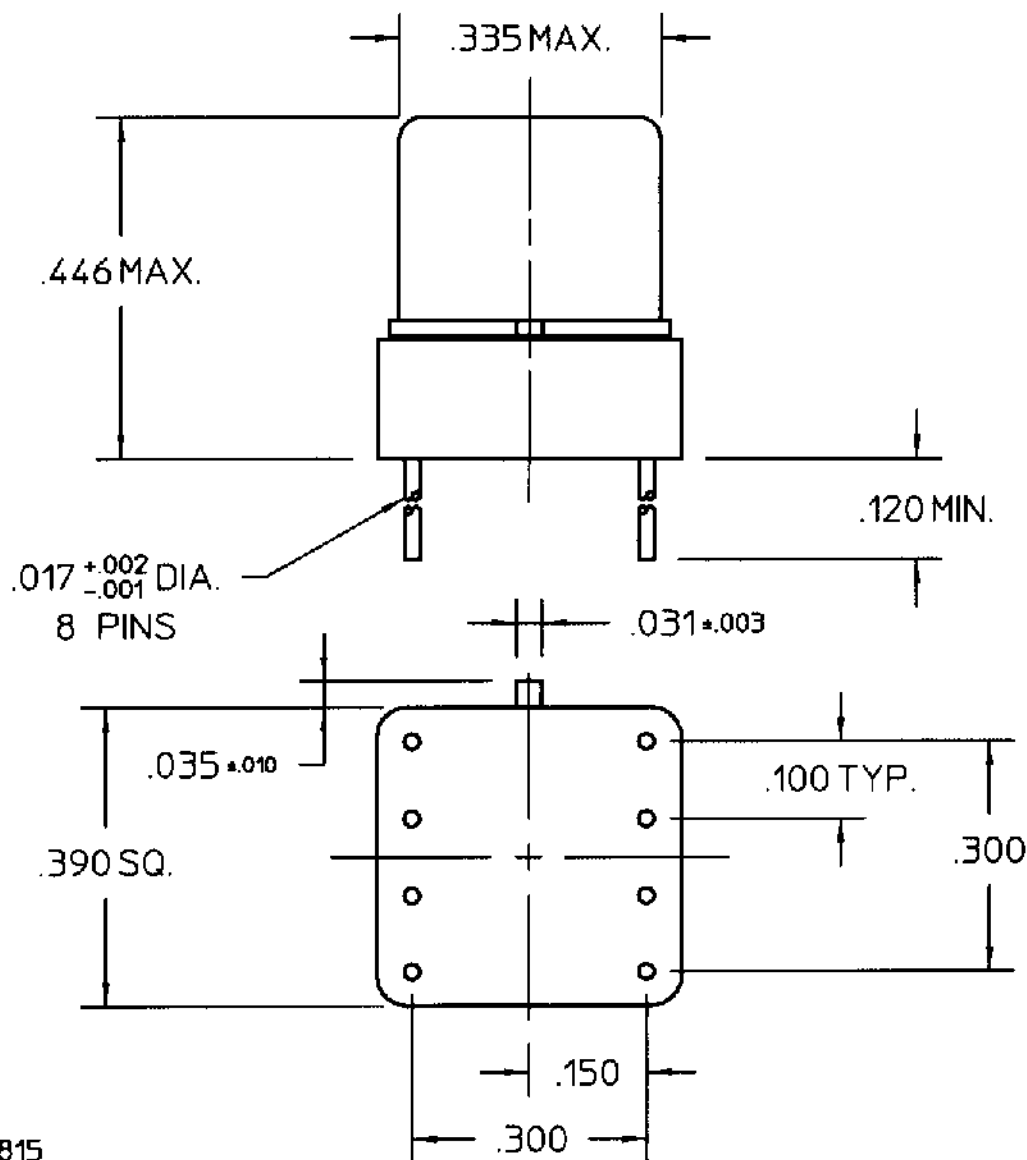

REV. 0

DCO 141815

COIL: @ 25°C
 RESISTANCE 1560 OHMS ±10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 15.2 VDC
 MUST RELEASE 9.5 VDC MAX, 1.8 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX

RELEASE TIME 4.0 MS MAX

CONTACT STABILIZATION 2.0 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 1A 28 VDC RESISTIVE 100,000
 OPERATIONS

DR. B.D. 2/28/00 JCK 2/28/00

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. QPL

CUST. NO. M39016/20-078P

REV.

JMADD RELAY

JMACDD-26XPS2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[JMACDD-26XPS2](#)