


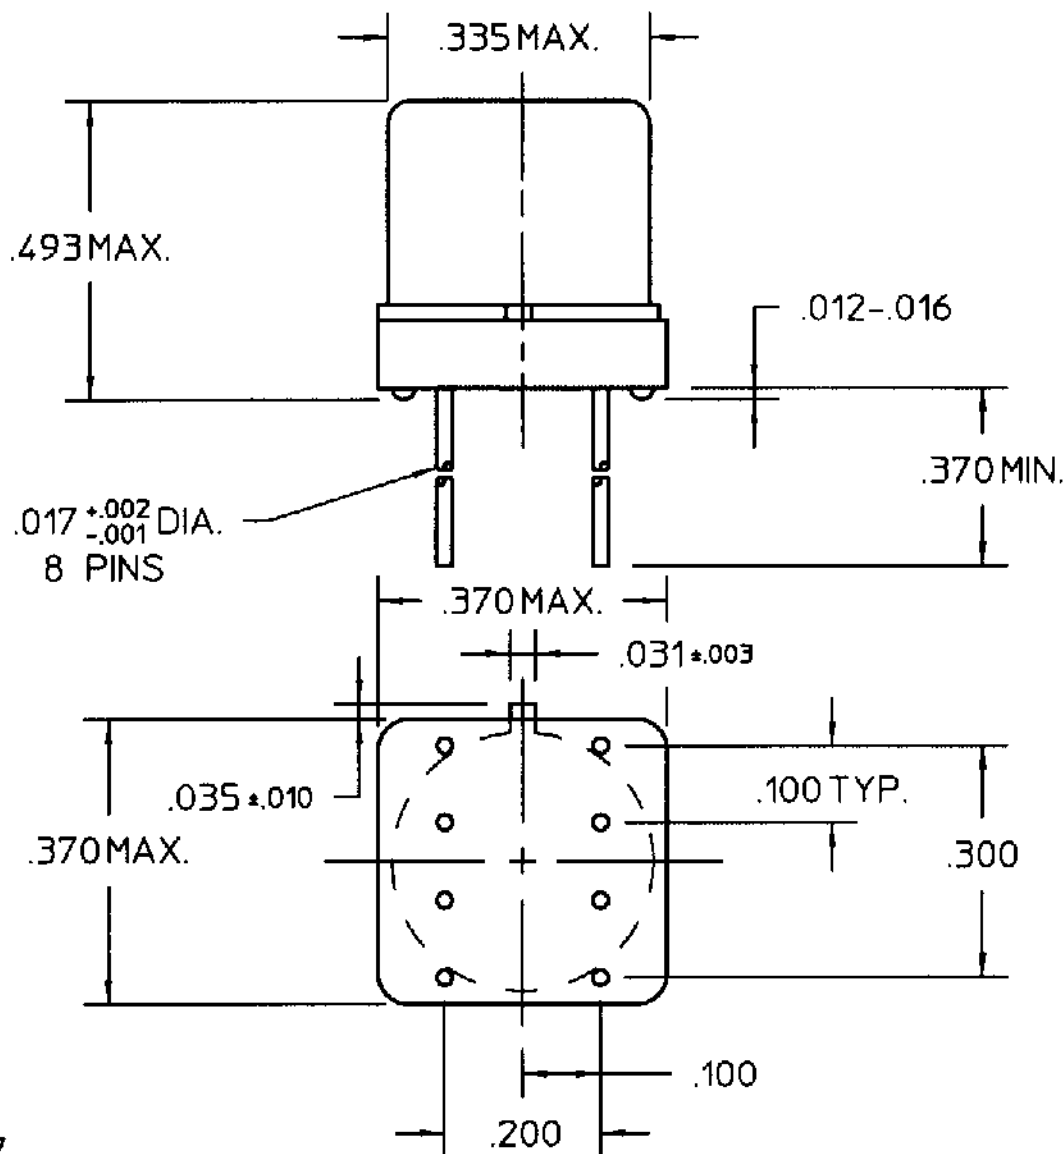

REV. 1
DCO 142087


COIL: @ 25°C
RESISTANCE _____ 850 OHMS $\pm$ 10%
NOMINAL VOLTAGE _____ 12.0 VDC
MUST OPERATE _____ 7.0 VDC
MUST RELEASE _____ 4.0 VDC MAX, 0.64 VDC MIN.

ENVIRONMENT:

VIBRATION _____ 10 _____ CPS TO _____ 3000 _____ CPS @ _____ 30 _____ g's
SHOCK _____ 75 _____ g's _____ 6 _____ MS. DURATION
TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE TIME 4.0 MS MAX
_____ RELEASE TIME 2.0 MS MAX
_____ CONTACT BOUNCE 15 MS MAX

CUSTOMER DATA SHEET



CONTACT RATING: _____ LOW LEVEL TO
1A 28 VDC RESISTIVE 100,000
OPERATIONS

DR. R.B. 10/3/95

CK. *Levy* 6/8/00

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. _____ OPL
CUST. NO. M39016/11-043L REV. _____

"JMS" RELAY

JMSC-12XLS