



SWITCH FUNCTION	
PDS 1	PDS 2
	
2,3-5-6	2-1,5-4





CIRCUIT: 2PDT

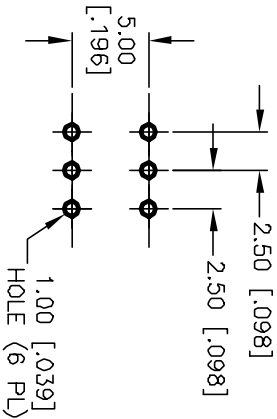

RECOMMENDED P.C.B. LAYOUT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 0.1A@ 30VDC
5. ELECTRICAL LIFE: 210,000 CYCLES TYPICAL.
6. OPERATING FORCE: 250±100 gram force TYP
7. TRAVEL:
1.2mm Travel To Latch TYPICAL
1.8mm Total Travel TYPICAL
8. CONTACT RESISTANCE: 50 MΩ Typical Initial
9. DIELECTRIC STRENGTH: 500 V RMS
10. OPERATING TEMP.: -10°C to +60°C
11. MATERIALS:
COVER/PLUNGER- ACETAL, UL94-HB
HOUSING- PBT, UL94-VD (VALOX)
CONTACT& TERMINALS- Copper Alloy w/Silver Plate.

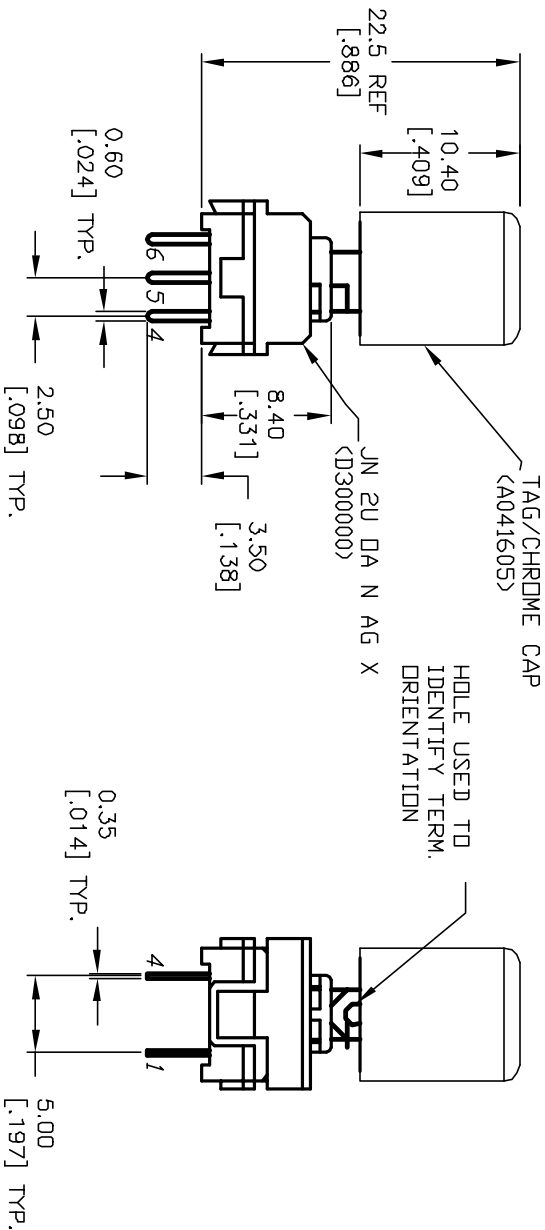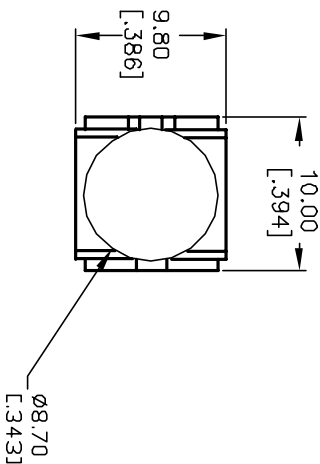

TITLE			
JN2U DA N AGX/ TAG-CHR			
E-SWITCH®			
REV.	ECN No.	DESCRIPTION	DATE
A	11978	RELEASED FOR PRODUCTION	2/26/02
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE	DATE	DR	DWG
2:1	2/26/02	-	XD0396A
			REV
			A