
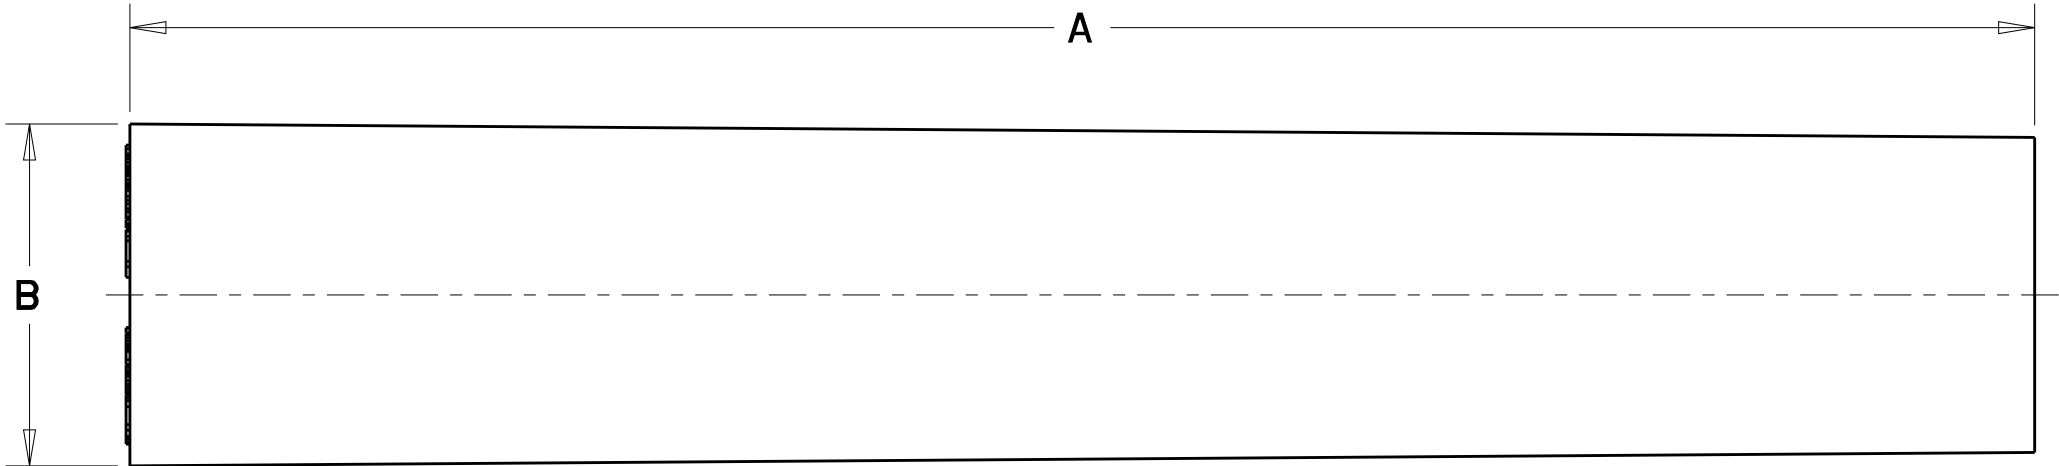


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			E	REDRAWN-REVISED PER E.O. P15306	12JUN1997	DM	AY
			F	REVISED PER E.O. P20435	22FEB2010	JA	RDR
			G	REVISED PER E.O. P20841	09MAR2011	JA	RDR
			H	REVISED PER ECO-16-007298	12MAY2016	JA	DM

PART NUMBER	A ±.100	B MAX
JS-16-00	2.465 [62.61]	.385 [9.78]
JS-12-00	2.500 [63.50]	.500 [12.70]
JS-04-00	3.437 [87.30]	.765 [19.43]

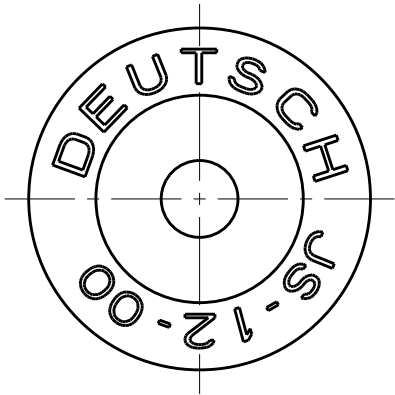

TE INTERNAL PN	DEUTSCH PN
JS-16-00	JS-16-00
JS-12-00	JS-12-00

CONTACT SIZE	MIN. INSUL. O.D. [mm]	MAX. INSUL. O.D. [mm]	WIRE RANGE [mm ²] REF ONLY
16	.100 [2.54]	.134 [3.40]	14-20 AWG [2.0-0.5]
12	.134 [3.40]	.170 [4.32]	12-14 AWG [3.0-2.0]
4	.280 [7.11]	.292 [7.42]	6 AWG [13.0]

SEE DTHD04-1-4P AND
DTHD06-1-4S FOR REPLACEMENT

- 3

MATERIAL - VMQ (RED-ORANGE)
- 2

FOR CONTACTS AND WIRE PERFORMANCE
AND APPLICATION CHARACTERISTICS,
SEE ENVELOPE DRAWING 0425-015-0000.

1. JS-12-00 SHOWN FOR REFERENCE ONLY.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. QUESADES 28AAPR1997	TE Connectivity NAME JIFFY SPLICE SIZES 16, 12, AND 4 ENVIRONMENTAL SIZE A3 CAGE CODE 4AFU8 DRAWING NO JS-XX-XX RESTRICTED TO -					
DIMENSIONS: in [mm]		CHK D. MEYER 09MAR2011						
		APVD R. REED 09MAR2011						
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.025 [0.64] 4 PLC ± ANGLES ±0° 30' 0"		PRODUCT SPEC -						
MATERIAL 3		FINISH	APPLICATION SPEC -	WEIGHT -	SCALE 4:1	SHEET 1	OF 1	REV H
CUSTOMER DRAWING								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[JS-16-00](#)