

SAMSUNG

»»»» PRODUCT SELECTION GUIDE




LCD, Memory and Storage

2H 2011



Samsung Semiconductor, Inc.

Samsung continues to lead the industry with the broadest portfolio of memory products and technology. Its DRAM, flash, SRAM products are found in computers—from ultra-mobile notebooks to powerful servers—and in a wide range of handheld devices such as smartphones and tablets. Samsung also delivers the industry's widest line of storage products from the consumer to the enterprise level. These include optical and hard disk drives as well as flash storage, such as Solid State Drives, and a range of embedded and removable flash storage products.

Markets		DRAM	SSD	FLASH	ASIC	LOGIC	TFT/LCD	ODD/HDD
Mobile / Wireless		●	N/A	●	●	●	●	●
Notebook PCs		●	●	●	●	●	●	●
Desktop PCs / Workstations		●	●	●	●	●	●	●
Servers		●	●	●	●	●	●	●
Networking / Communications		●	●	●	●	●	N/A	●
Consumer Electronics		●	N/A	●	●	●	●	●

SEMICONDUCTOR
LARGEST
INNOVATION
DDR4
CUTTING-EDGE
FLASH
ENTERPRISE
E-MODE DESIGN
SSD
DYNAMIC
LOGIC INNOVATION
MEMORY
GREEN
-SP
EDGE
R3 STORAGE
ENTERPRISE
POWER TOGGLE-MODE DE
NAND



DRAM

Pages 4-12

samsung.com/semi/dram

- DDR3 SDRAM
- DDR2 SDRAM
- DDR SDRAM
- SDRAM
- Mobile DRAM
- Graphics DDR SDRAM
- DRAM Ordering Information

DRAM

FLASH - SSD

Pages 13-15

samsung.com/semi/flash

- SLC Flash
- MLC Flash
- SD and microSD Cards
- moviNAND™ (eMMC)
- Solid State Drive
- SATA SSD
- Flash Ordering Information

HIGH-SPEED SRAM

Pages 16-20

samsung.com/semi/sram

- Asynchronous
- Synchronous
- NtRAM™
- Late-Write RR SRAM
- DDR Synchronous SRAM
- QDR Synchronous SRAM
- SRAM Ordering Information

MULTI-CHIP PACKAGE

Page 21

samsung.com/semi/mcp

- NAND + MDDR
- moviNAND + LPDDR2
- NOR + UtRAM

STORAGE

Pages 22-24

samsung.com/greenmemory

- Solid State Drive
- SATA SSD

samsung.com/hdd

- Hard Disk Drive

samsungodd.com

- Optical Disk Drive

LCD

Pages 25-27

tftlcd.com

- Exclusive Digital Information Display (E-DID)
- Performance Digital Information Display (P-DID)
- Basic Digital Information Display (B-DID)
- Tablets
- Notebooks/PCs
- Monitors

DDR3 SDRAM REGISTERED MODULES

Density	Voltage	Organization	Part Number	Composition	Compliance	Speed (Mbps)	Ranks	Production
1GB	1.5V	128Mx72	M393B2873FHO-C(F8/H9)(04/05)	1Gb (128M x8) * 9	Lead Free & Halogen Free	1066/1333	1	Now
			M393B2873GB0-C(F8/H9/K0/MA)(08/09)	1Gb (128M x8) * 9	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	1	Now
2GB	1.5V	256Mx72	M393B5673FHO-C(F8/H9)(04/05)	1Gb (128M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M393B5673GB0-C(F8/H9/K0/MA)(08/09)	1Gb (128M x8) * 18	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	2	Now
			M393B5670FHO-C(F8/H9)(04/05)	1Gb (256M x4) * 18	Lead Free & Halogen Free	1066/1333	1	Now
			M393B5670GB0-C(F8/H9/K0/MA)(08/09)	1Gb (256M x4) * 18	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	1	Now
			M393B5773CHO-C(F8/H9)(04/05)	2Gb (256M x8) * 9	Lead Free & Halogen Free	1066/1333	1	Now
			M393B5773DHO-C(F8/H9/K0/MA)(08/09)	2Gb (256M x8) * 9	Lead Free & Halogen Free	1066/1333/1600/1866	1	Now
			M393B5173FHO-C(F8/H9)(04/05)	1Gb (128M x8) * 36	Lead Free & Halogen Free	1066/1333	4	Now
4GB	1.5V	512Mx72	M393B5173GB0-C(F8/H9)(08/09)	1Gb (128M x8) * 36	Lead Free & Halogen Free, Flip Chip	1066/1333	4	Now
			M393B5170FHO-C(F8/H9)(04/05)	1Gb (256M x4) * 36	Lead Free & Halogen Free	1066/1333	2	Now
			M393B5170GB0-C(F8/H9/K0/MA)(08/09)	1Gb (256M x4) * 36	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	2	Now
			M393B5273CHO-C(F8/H9)(04/05)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M393B5273DHO-C(F8/H9/K0/MA)(08/09)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M393B5270CHO-C(F8/H9)(04/05)	2Gb (512M x4) * 18	Lead Free & Halogen Free	1066/1333	1	Now
			M393B5270DHO-C(F8/H9/K0/MA)(08/09)	2Gb (512M x4) * 18	Lead Free & Halogen Free	1066/1333/1600/1866	1	Now
			M393B1K73CHO-C(F8/H9)(04/05)	2Gb (256M x8) * 36	Lead Free & Halogen Free	1066/1333	4	Now
8GB	1.5V	1Gx72	M393B1K73DHO-C(F8/H9)(08/09)	2Gb (256M x8) * 36	Lead Free & Halogen Free	1066/1333	4	Now
			M393B1K70CHO-C(F8/H9)(04/05)	2Gb (512M x4) * 36	Lead Free & Halogen Free	1066/1333	2	Now
			M393B1K70DHO-C(F8/H9/K0/MA)(08/09)	2Gb (512M x4) * 36	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M393B2K70CM0-C(F8/H9)(04/05)	2Gb DDP (1G x4) * 36	Lead Free & Halogen Free	1066/1333	4	Now
16GB	1.5V	2Gx72	M393B2K70DM0-C(F8/H9)(08/09)	2Gb DDP (1G x4) * 36	Lead Free & Halogen Free	1066/1333	4	Now
			M393B1G70BHO-C(F8/H9/K0/MA)(08/09)	4Gb (1G x4) * 18	Lead Free & Halogen Free	1066/1333	1	Now
8GB	1.5V	1Gx72	M393B1G73BHO-C(F8/H9/K0/MA)(08/09)	4Gb (512M x8) * 18	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M393B2G70AHO-C(F8/H9)(04/05)	4Gb (1G x4) * 36	Lead Free & Halogen Free	1066/1333	2	Now
16GB	1.5V	2Gx72	M393B2G70BHO-C(F8/H9/K0/MA)(08/09)	4Gb (1G x4) * 36	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M393B2G73AHO-C(F8/H9)(04/05)	4Gb (512M x8) * 36	Lead Free & Halogen Free	1066/1333	4	Now
			M393B2G73BHO-C(F8/H9)(08/09)	4Gb (512M x8) * 36	Lead Free & Halogen Free	1066/1333	4	Now
			M393B4G70AM0-C(F8/H9)(04/05)	4Gb DDP (2G x4) * 36	Lead Free & Halogen Free	1066/1333	4	Now
32GB	1.5V	4Gx72	M393B4G70BM0-C(F8/H9)(08/09)	4Gb DDP (2G x4) * 36	Lead Free & Halogen Free	1066/1333	4	Now
			M393B5773CHO-Y(F8/H9)(04/05)	2Gb (256M x4) * 9	Lead Free & Halogen Free	1066/1333	1	Now
2GB	1.35V	256Mx72	M393B5773DHO-Y(F8/H9/K0)(08/09)	2Gb (256M x4) * 9	Lead Free & Halogen Free	1066/1333/1600	1	Now
			M393B5173FHO-Y(F8/H9)(04/05)	1Gb (128M x8) * 36	Lead Free & Halogen Free	1066/1333	4	Now
4GB	1.35V	512Mx72	M393B5173GB0-Y(F8/H9)(08/09)	1Gb (128M x8) * 36	Lead Free & Halogen Free, Flip Chip	1066/1333	4	Now
			M393B5170FHO-Y(F8/H9)(04/05)	1Gb (256M x4) * 36	Lead Free & Halogen Free	1066/1333	2	Now
			M393B5170GB0-Y(F8/H9/K0)(08/09)	1Gb (256M x4) * 36	Lead Free & Halogen Free, Flip Chip	1066/1333/1600	2	Now
			M393B5273CHO-Y(F8/H9)(04/05)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M393B5273DHO-Y(F8/H9/K0)(08/09)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333/1600	2	Now
			M393B5270CHO-Y(F8/H9)(04/05)	2Gb (512M x4) * 18	Lead Free & Halogen Free	1066/1333	1	Now
			M393B5270DHO-Y(F8/H9/K0)(08/09)	2Gb (512M x4) * 18	Lead Free & Halogen Free	1066/1333/1600	1	Now
			M393B1K73CHO-Y(F8/H9)(04/05)	2Gb (256M x8) * 36	Lead Free & Halogen Free	1066/1333	4	Now
8GB	1.35V	1Gx72	M393B1K73DHO-Y(F8/H9)(08/09)	2Gb (256M x8) * 36	Lead Free & Halogen Free	1066/1333	4	Now
			M393B1K70CHO-Y(F8/H9)(04/05)	2Gb (512M x4) * 36	Lead Free & Halogen Free	1066/1333	2	Now
			M393B1K70DHO-Y(F8/H9/K0)(08/09)	2Gb (512M x4) * 36	Lead Free & Halogen Free	1066/1333/1600	2	Now
			M393B2K70CM0-Y(F8/H9)(04/05)	2Gb DDP (1G x4) * 36	Lead Free & Halogen Free	1066/1333	4	Now
16GB	1.35V	2Gx72	M393B2K70DM0-Y(F8/H9)(08/09)	2Gb DDP (1G x4) * 36	Lead Free & Halogen Free	1066/1333	4	Now
			M393B1G70BHO-Y(F8/H9/K0/MA)(08/09)	4Gb (1G x4) * 18	Lead Free & Halogen Free	1066/1333/1600	1	Now
8GB	1.35V	1Gx72	M393B1G73BHO-Y(F8/H9/K0/MA)(08/09)	4Gb (512M x8) * 18	Lead Free & Halogen Free	1066/1333/1600	2	Now
			M393B2G70AHO-Y(F8/H9)(04/05)	4Gb (1G x4) * 36	Lead Free & Halogen Free	1066/1333/1600	2	Now
16GB	1.35V	2Gx72	M393B2G70BHO-Y(F8/H9/K0)(08/09)	4Gb (1G x4) * 36	Lead Free & Halogen Free	1066/1333/1600	2	Now
			M393B2G73AHO-Y(F8/H9)(04/05)	4Gb (512M x8) * 36	Lead Free & Halogen Free	1066/1333	4	Now
			M393B2G73BHO-Y(F8/H9)(08/09)	4Gb (512M x8) * 36	Lead Free & Halogen Free	1066/1333	4	Now
			M393B4G70AM0-Y(F8/H9)(04/05)	4Gb DDP (2G x4) * 36	Lead Free & Halogen Free	1066/1333	4	Now
32GB	1.35V	4Gx72	M393B4G70BM0-Y(F8/H9)(08/09)	4Gb DDP (2G x4) * 36	Lead Free & Halogen Free	1066/1333	4	Now
			M393B5773CHO-Y(F8/H9)(04/05)	2Gb (256M x4) * 9	Lead Free & Halogen Free	1066/1333	1	Now

NOTES: F7 = DDR3-800 (6-6-6)
04 = IDT B0 register

F8 = DDR3-1066 (7-7-7)
05 = Inphi C0 register

H9 = DDR3-1333 (9-9-9)
08 = IDT

K0 = DDR3-1600 (11-11-11)
09 = Inphi

MA = DDR3-1866 (13-13-13)
* K0 (1600Mbps) available in ES only

DDR3 SDRAM VLP REGISTERED MODULES

Density	Voltage	Organization	Part Number	Composition	Compliance	Speed (Mbps)	Ranks	Production
1GB	1.5V	128Mx72	M392B2873FH0-C(F8/H9)(04/05)	1Gb (128M x8) * 9	Lead Free & Halogen Free	1066/1333	1	Now
			M392B2873GB0-C(F8/H9/K0/MA)(08/09)	1Gb (128M x8) * 9	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	1	Now
2GB	1.5V	256Mx72	M392B5673FH0-C(F8/H9)(04/05)	1Gb (128M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M392B5673GB0-C(F8/H9/K0/MA)(08/09)	1Gb (128M x8) * 18	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	2	Now
			M392B5670FH0-C(F8/H9)(04/05)	1Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333	1	Now
			M392B5670GB0-C(F8/H9/K0/MA)(08/09)	1Gb (256M x8) * 18	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	1	Now
			M392B5773CH0-C(F8/H9)(04/05)	2Gb (256M x8) * 9	Lead Free & Halogen Free	1066/1333	1	Now
			M392B5773DH0-C(F8/H9/K0/MA)(08/09)	2Gb (256M x8) * 9	Lead Free & Halogen Free	1066/1333/1600/1866	1	Now
4GB	1.5V	512Mx72	M392B5170FM0-C(F8/H9)(04/05)	1Gb DDP (512M x4) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M392B5273CH0-C(F8/H9)(04/05)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M392B5273DH0-C(F8/H9/K0/MA)(08/09)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M392B5270CH0-C(F8/H9)(04/05)	2Gb (512M x4) * 18	Lead Free & Halogen Free	1066/1333	1	Now
			M392B5270DH0-C(F8/H9/K0/MA)(08/09)	2Gb (512M x4) * 18	Lead Free & Halogen Free	1066/1333/1600/1866	1	Now
8GB	1.5V	1Gx72	M392B1K73CM0-C(F8/H9)(04/05)	2Gb DDP (512M x8) * 18	Lead Free & Halogen Free	1066/1333	4	Now
			M392B1K73DM0-C(F8/H9)(08/09)	2Gb DDP (512M x8) * 18	Lead Free & Halogen Free	1066/1333	4	Now
			M392B1K70CM0-C(F8/H9)(04/05)	2Gb DDP (1G x4) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M392B1K70DM0-C(F8/H9/K0/MA)(08/09)	2Gb DDP (1G x4) * 18	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M392B1G73BH0-C(F8/H9/K0/MA)(08/09)	4Gb (512M x8) * 18	Lead Free & Halogen Free	1066/1333/1600/1866	1	Now
			M392B1G70BH0-C(F8/H9/K0/MA)(08/09)	4Gb (1G x4) * 18	Lead Free & Halogen Free	1066/1333/1600/1866	1	Now
16GB	1.5V	2Gx72	M392B2G70AM0-C(F8/H9)(04/05)	4Gb DDP (2G x4) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M392B2G70BM0-C(F8/H9/K0/MA)(08/09)	4Gb DDP (2G x4) * 18	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M392B2G73AM0-C(F8/H9)(04/05)	4Gb DDP (1G x8) * 18	Lead Free & Halogen Free	1066/1333	4	Now
			M392B2G73BM0-C(F8/H9)(08/09)	4Gb DDP (1G x8) * 18	Lead Free & Halogen Free	1066/1333	4	Now
2GB	1.35V	256Mx72	M392B5773CH0-Y(F8/H9)(04/05)	2Gb (256M x8) * 9	Lead Free & Halogen Free	1066/1333	1	Now
			M392B5773DH0-Y(F8/H9/K0)(08/09)	2Gb (256M x8) * 9	Lead Free & Halogen Free	1066/1333/1600	1	Now
4GB	1.35V	512Mx72	M392B5170FM0-Y(F8/H9)(04/05)	1Gb DDP (512M x4) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M392B5273CH0-Y(F8/H9)(04/05)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M392B5273DH0-Y(F8/H9/K0)(08/09)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333/1600	2	Now
			M392B5270CH0-Y(F8/H9)(04/05)	2Gb (512M x4) * 18	Lead Free & Halogen Free	1066/1333	1	Now
			M392B5270DH0-Y(F8/H9/K0)(08/09)	2Gb (512M x4) * 18	Lead Free & Halogen Free	1066/1333/1600	1	Now
8GB	1.35V	1Gx72	M392B1K73CM0-Y(F8/H9)(04/05)	2Gb DDP (512M x8) * 18	Lead Free & Halogen Free	1066/1333	4	Now
			M392B1K73DM0-Y(F8/H9)(08/09)	2Gb DDP (512M x8) * 18	Lead Free & Halogen Free	1066/1333	4	Now
			M392B1K70CM0-Y(F8/H9)(04/05)	2Gb DDP (1G x4) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M392B1K70DM0-Y(F8/H9/K0)(08/09)	2Gb DDP (1G x4) * 18	Lead Free & Halogen Free	1066/1333/1600	2	Now
			M392B1G73BH0-Y(F8/H9/K0)(08/09)	4Gb (512M x8) * 18	Lead Free & Halogen Free	1066/1333/1600	1	Now
			M392B1G70BH0-Y(F8/H9/K0)(08/09)	4Gb (1G x4) * 18	Lead Free & Halogen Free	1066/1333/1600	1	Now
16GB	1.35V	2Gx72	M392B2G70AM0-Y(F8/H9)(04/05)	4Gb DDP (2G x4) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M392B2G70BM0-Y(F8/H9/K0)(08/09)	4Gb DDP (2G x4) * 18	Lead Free & Halogen Free	1066/1333/1600	2	Now
			M392B2G70AM0-Y(F8/H9)(04/05)	4Gb DDP (1G x8) * 18	Lead Free & Halogen Free	1066/1333	4	Now
			M392B2G70BM0-Y(F8/H9)(08/09)	4Gb DDP (1G x8) * 18	Lead Free & Halogen Free	1066/1333	4	Now

NOTES: F7 = DDR3-800 (6-6-6) F8 = DDR3-1066 (7-7-7) H9 = DDR3-1333 (9-9-9) K0 = DDR3-1600 (11-11-11) MA = DDR3-1866 (13-13-13)
 04 = IDT B0 register 05 = Inphi C0 register 08 = IDT 09 = Inphi

DDR3 SDRAM UNBUFFERED MODULES

Density	Voltage	Organization	Part Number	Composition	Compliance	Speed (Mbps)	Ranks	Production
1GB	1.5V	128Mx64	M378B2873FH0-C(F8/H9)	1Gb (128M x8) * 8	Lead Free & Halogen Free	1066/1333	1	Now
			M378B2873GB0-C(F8/H9/K0/MA)	1Gb (128M x8) * 8	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	1	Now
2GB	1.5V	256Mx64	M378B5673FH0-C(F8/H9)	1Gb (128M x8) * 16	Lead Free & Halogen Free	1066/1333	2	Now
			M378B5673GB0-C(F8/H9/K0/MA)	1Gb (128M x8) * 16	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	2	Now
			M378B5773CH0-C(F8/H9)	2Gb (256M x8) * 8	Lead Free & Halogen Free	1066/1333	1	Now
			M378B5773DH0-C(F8/H9/K0/MA)	2Gb (256M x8) * 8	Lead Free & Halogen Free	1066/1333/1600/1866	1	Now
			M378B5273CH0-C(F8/H9)	2Gb (256M x8) * 16	Lead Free & Halogen Free	1066/1333	2	Now
4GB	1.5V	512Mx64	M378B5273DH0-C(F8/H9/K0/MA)	2Gb (256M x8) * 16	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M378B5173BH0-C(F8/H9/K0/MA)	4Gb (512M x8) * 8	Lead Free & Halogen Free	1066/1333/1600/1866	1	Now
			M378B1G73AH0-C(F8/H9)	4Gb (512M x8) * 16	Lead Free & Halogen Free	1066/1333	2	Now
8GB	1.5V	1024Mx64	M378B1G73BH0-C(F8/H9/K0/MA)	4Gb (512M x8) * 16	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now

DDR3 SDRAM UNBUFFERED MODULES (ECC)

Density	Voltage	Organization	Part Number	Composition	Compliance	Speed (Mbps)	Ranks	Production
1GB	1.5V	128Mx72	M391B2873FH0-C(F8/H9)	1Gb (128M x8) * 9	Lead Free & Halogen Free	1066/1333	1	Now
			M391B2873GB0-C(F8/H9/K0/MA)	1Gb (128M x8) * 9	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	1	Now
2GB	1.5V	256Mx72	M391B5673FH0-C(F8/H9)	1Gb (128M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
			M391B5773CH0-C(F8/H9)	2Gb (256M x8) * 9	Lead Free & Halogen Free	1066/1333	1	Now
			M391B5773DH0-C(F8/H9/K0/MA)	2Gb (256M x8) * 9	Lead Free & Halogen Free	1066/1333/1600/1866	1	Now
			M391B5273CH0-C(F8/H9)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
4GB	1.5V	512Mx72	M391B5273DH0-C(F8/H9/K0/MA)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M391B5173BH0-C(F8/H9/K0/MA)	4Gb (512M x8) * 9	Lead Free & Halogen Free	1066/1333/1600/1866	1	Now
			M391B1G73AH0-C(F8/H9)	4Gb (512M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
8GB	1.5V	1024Mx72	M391B1G73BH0-C(F8/H9/K0/MA)	4Gb (512M x8) * 18	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M391B2873FH0-Y(F8/H9)	1Gb (128M x8) * 9	Lead Free & Halogen Free	1066/1333	1	Now
1GB	1.35V	128Mx72	M391B2873GB0-Y(F8/H9/K0)	1Gb (128M x8) * 9	Lead Free & Halogen Free, Flip Chip	1066/1333/1600	1	Now
			M391B5673FH0-Y(F8/H9)	1Gb (128M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
2GB	1.35V	256Mx72	M391B5773CH0-Y(F8/H9)	2Gb (256M x8) * 9	Lead Free & Halogen Free	1066/1333	1	Now
			M391B5773DH0-Y(F8/H9/K0)	2Gb (256M x8) * 9	Lead Free & Halogen Free	1066/1333/1600	1	Now
			M391B5273CH0-Y(F8/H9)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
4GB	1.35V	512Mx72	M391B5273DH0-Y(F8/H9/K0)	2Gb (256M x8) * 18	Lead Free & Halogen Free	1066/1333/1600	2	Now
			M391B5173BH0-Y(F8/H9/K0)	4Gb (512M x8) * 9	Lead Free & Halogen Free	1066/1333/1600	1	Now
			M391B1G73AH0-Y(F8/H9)	4Gb (512M x8) * 18	Lead Free & Halogen Free	1066/1333	2	Now
8GB	1.35V	1024Mx72	M391B1G73BH0-Y(F8/H9/K0)	4Gb (512M x8) * 18	Lead Free & Halogen Free	1066/1333/1600	2	Now

NOTES: F7 = DDR3-800 (6-6-6) F8 = DDR3-1066 (7-7-7) H9 = DDR3-1333 (9-9-9) K0 = DDR3-1600 (11-11-11) MA = DDR3-1866 (13-13-13)

DDR3 SDRAM SODIMM MODULES

Density	Voltage	Organization	Part Number	Composition	Compliance	Speed (Mbps)	Ranks	Production
1GB	1.5V	128Mx64	M471B2873FHS-C(F8/H9)	1Gb (128M x8) * 8	Lead Free & Halogen Free	1066/1333	1	Now
			M471B2873GB0-C(F8/H9/K0/MA)	1Gb (128M x8) * 8	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	1	Now
2GB	1.5V	256Mx64	M471B5673FH0-C(F8/H9)	1Gb (128M x8) * 16	Lead Free & Halogen Free	1066/1333	2	Now
			M471B5673GB0-C(F8/H9/K0/MA)	1Gb (128M x8) * 16	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	2	Now
			M471B5773CHS-C(F8/H9)	2Gb (256M x8) * 8	Lead Free & Halogen Free	1066/1333	1	Now
			M471B5773DH0-C(F8/H9/K0/MA)	2Gb (256M x8) * 8	Lead Free & Halogen Free	1066/1333/1600/1866	1	Now
			M471B5273CH0-C(F8/H9)	2Gb (256M x8) * 16	Lead Free & Halogen Free	1066/1333	2	Now
4GB	1.5V	512Mx64	M471B5273DH0-C(F8/H9/K0/MA)	2Gb (256M x8) * 16	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M471B5173BH0-C(F8/H9/K0)	4Gb (512M x8) * 8	Lead Free & Halogen Free	1066/1333	1	Now
			M471B1G73AH0-C(F8/H9/K0)	4Gb (512M x8) * 16	Lead Free & Halogen Free	1066/1333	2	Now
8GB	1.5V	1024Mx64	M471B1G73BH0-C(F8/H9/K0/MA)	4Gb (512M x8) * 16	Lead Free & Halogen Free	1066/1333/1600/1866	2	Now
			M471B2873FHS-Y(F8/H9)	1Gb (128M x8) * 8	Lead Free & Halogen Free	1066/1333	1	Now
1GB	1.35V	128Mx64	M471B2873GB0-Y(F8/H9/K0)	1Gb (128M x8) * 8	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	1	Now
			M471B5673FH0-Y(F8/H9)	1Gb (128M x8) * 16	Lead Free & Halogen Free	1066/1333	2	Now
2GB	1.35V	256Mx64	M471B5673GB0-Y(F8/H9/K0)	1Gb (128M x8) * 16	Lead Free & Halogen Free, Flip Chip	1066/1333/1600	2	Now
			M471B5773CHS-Y(F8/H9)	2Gb (256M x8) * 8	Lead Free & Halogen Free	1066/1333	1	Now
			M471B5773DH0-Y(F8/H9/K0)	2Gb (256M x8) * 8	Lead Free & Halogen Free	1066/1333/1600	1	Now
			M471B5273CH0-Y(F8/H9)	2Gb (256M x8) * 16	Lead Free & Halogen Free	1066/1333	2	Now
4GB	1.35V	512Mx64	M471B5273DH0-Y(F8/H9/K0)	2Gb (256M x8) * 16	Lead Free & Halogen Free	1066/1333/1600	2	Now
			M471B5173BH0-Y(F8/H9/K0)	4Gb (512M x8) * 8	Lead Free & Halogen Free	1066/1333/1600	1	Now
			M471B1G73AH0-Y(F8/H9)	4Gb (512M x8) * 16	Lead Free & Halogen Free	1066/1333	2	Now
8GB	1.35V	1024Mx64	M471B1G73BH0-Y(F8/H9/K0)	4Gb (512M x8) * 16	Lead Free & Halogen Free	1066/1333/1600	2	Now

NOTES: F7 = DDR3-800 (6-6-6) F8 = DDR3-1066 (7-7-7) H9 = DDR3-1333 (9-9-9) K0 = DDR3-1600 (11-11-11) MA = DDR3-1866 (13-13-13)

DDR3 SDRAM COMPONENTS

Density	Voltage	Organization	Part Number	# Pins-Package	Compliance	Speed (Mbps)	Dimensions	Production
1Gb	1.5V	256M x4	K4B1G0446F-HC(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	7.5x11mm	Now
			K4B1G0446G-BC(F8/H9/K0/MA)	78 Ball -FBGA	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	7.5x11mm	Now
1Gb	1.5V	128M x8	K4B1G0846F-HC(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	7.5x11mm	Now
			K4B1G0846G-BC(F8/H9/K0/MA)	78 Ball -FBGA	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866	7.5x11mm	Now
1Gb	1.5V	128M x16	K4B1G1646G-BC(F8/H9/K0/MA/NB)	96 Ball -FBGA	Lead Free & Halogen Free, Flip Chip	1066/1333/1600/1866/2133	7.5x13.3mm	Now
2Gb	1.5V	512M x4	K4B2G0446G-HC(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	7.5x11mm	Now
			K4B2G0446D-HC(F8/H9/K0/MA)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600/1866	7.5x11mm	Now
2Gb	1.5V	256M x8	K4B2G0846C-HC(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	7.5x11mm	Now
			K4B2G0846D-HC(F8/H9/K0/MA)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600/1866	7.5x11mm	Now
2Gb	1.5V	128M x16	K4B2G1646C-HC(F8/H9/K0/MA)	96 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600/1866	7.5x13.3mm	Now
4Gb	1.5V	1G x4	K4B4G0446A-HC(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	10x12.5mm	Now
			K4B4G0446B-HC(F8/H9/K0/MA)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600/1866	10x11mm	Now
4Gb	1.5V	512M x8	K4B4G0846A-HC(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	10x12.5mm	Now
			K4B4G0846B-HC(F8/H9/K0/MA)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600/1866	10x11mm	Now
1Gb	1.35V	256M x4	K4B1G0446F-HY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	7.5x11mm	Now
			K4B1G0446G-BY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free, Flip Chip	1066/1333/1600	7.5x11mm	Now
1Gb	1.35V	128M x8	K4B1G0846F-HY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	7.5x11mm	Now
			K4B1G0846G-BY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free, Flip Chip	1066/1333/1600	7.5x11mm	Now
2Gb	1.35V	512M x4	K4B2G0446C-HY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	7.5x11mm	Now
			K4B2G0446D-HY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	7.5x11mm	Now
2Gb	1.35V	256M x8	K4B2G0846C-HY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	7.5x11mm	Now
			K4B2G0846D-HY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	7.5x11mm	Now
4Gb	1.35V	1G x4	K4B4G0446A-HY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	10x12.5mm	Now
			K4B4G0446B-HY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	10x11mm	Now
4Gb	1.35V	512M x8	K4B4G0846A-HY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	10x12.5mm	Now
			K4B4G0846B-HY(F8/H9/K0)	78 Ball -FBGA	Lead Free & Halogen Free	1066/1333/1600	10x11mm	Now

NOTES: F7 = DDR3-800 (6-6-6)
F8 = DDR3-1066 (7-7-7)

H9 = DDR3-1333 (9-9-9)
K0 = DDR3-1600 (11-11-11)

MA = DDR3-1866 (13-13-13)
NB = DDR3-2133 (14-14-14)

* MA, and NB are available in ES only

DDR2 SDRAM REGISTERED MODULES

Density	Organization	Part Number	Composition	Compliance	Speed (Mbps)	Register	Rank	Production
1GB	128Mx72	M393T2863FBA-C(E6/F7)	(128M x8)*9	Lead free	667/800	Y	1	Now
2GB	256Mx72	M393T5660FBA-C(E6/F7)	(256M x4)*18	Lead free	667/800	Y	1	Now
		M393T5663FBA-C(E6/E7)	(128M x8)*18	Lead free	667/800	Y	2	Now
4GB	512Mx72	M393T5160FBA-C(E6/F7)	(256M x4)*36	Lead free	667/800	Y	2	Now

NOTES: E6 = PC2-5300 (DDR2-667 @ CL=5)

F7 = PC2-6400 (DDR2-800 @ CL=6)

E7 = PC2-6400 (DDR2-800 @ CL=5)

Voltage = 1.8V

DDR2 SDRAM VLP REGISTERED MODULES

Density	Organization	Part Number	Composition	Compliance	Speed (Mbps)	Register	Rank	Production
2GB	256Mx72	M392T5660FBA-CE6	(256M x4)*18	Lead free	667	Y	1	Now

DDR2 SDRAM FULLY BUFFERED MODULES

Density	Organization	Part Number	Composition	Compliance	Speed (Mbps)	Voltage	Rank	Production
2GB	256Mx72	M395T5663FB4-CE68	(128M x8)*18	Lead free	667	1.8V	2	Now
4GB	512Mx72	M395T5160FB4-CE68	(256M x4)*36	Lead free	667	1.8V	2	Now
		M395T5163FB4-CE68	(128M x8)*36	Lead free	667	1.8V	4	Now

NOTES: E6 = PC2-5300 (DDR2-667 @ CL=5)

Voltage = 1.8V (AMB Voltage = 1.5V)

AMB = IDT L4

DDR2 SDRAM UNBUFFERED MODULES

Density	Organization	Part Number	Composition	Compliance	Speed (Mbps)	Rank	Production
1GB	128Mx64	M378T2863FBS-C(E6/F7/E7)	(128M x8)*8	Lead free	667/800	1	Now
2GB	256Mx64	M378T5663FB3-C(E6/F7/E7)	(128M x8)*16	Lead free	667/800	2	Now
NOTES: E6 = PC2-5300 (DDR2-667 @ CL=5) E7 = PC2-6400 (DDR2-800 @ CL=5) F7 = PC2-6400 (DDR2-800 @ CL=6) Voltage = 1.8V							

DDR2 SDRAM UNBUFFERED MODULES (ECC)

Density	Organization	Part Number	Composition	Compliance	Speed (Mbps)	Rank	Production
1GB	128Mx72	M391T2863FB3-C(E6/F7)	(128Mx8)*9	Lead free	667/800	1	Now
2GB	256Mx64	M391T5663FB3-C(E6/F7)	(128Mx8)*18	Lead free	667/800	2	Now
NOTES: E6 = PC2-5300 (DDR2-667 @ CL=5) E7 = PC2-6400 (DDR2-800 @ CL=5) F7 = PC2-6400 (DDR2-800 @ CL=6) Voltage = 1.8V							

DDR2 SDRAM SODIMM MODULES

Density	Organization	Part Number	Composition	Compliance	Speed (Mbps)	Rank	Production
1GB	128Mx64	M470T2863FB3-C(E6/F7/E7)	(64Mx16)*8	Lead free	667/800	2	Now
2GB	256Mx64	M470T5663FB3-C(E6/F7/E7)	(128M x8)*8	Lead free	667/800	2	Now
NOTES: E6 = PC2-5300 (DDR2-667 @ CL=5) E7 = PC2-6400 (DDR2-800 @ CL=5) F7 = PC2-6400 (DDR2-800 @ CL=6) Voltage = 1.8V							

DDR2 SDRAM COMPONENTS

Density	Organization	Part Number	# Pins-Package	Dimensions	Package	Speed (Mbps)	Production
256Mb	16Mx16	K4T56163QN-HC(E6/F7/E7/F8)	84-FBGA	7.5x12.5mm	Lead free & Halogen free	667/800/1066	Now
	128M x4	K4T51043QJ-HC(E6/F7/E7)	60-FBGA	7.5x9.5mm	Lead free & Halogen free	667/800	Q3
512Mb	64M x8	K4T51083QJ-HC(E6/F7/E7/F8)	60-FBGA	7.5x9.5mm	Lead free & Halogen free	667/800/1066	Q3
	32M x16	K4T51163QJ-HC(E6/F7/E7/F8)	84-FBGA	7.5x12.5mm	Lead free & Halogen free	667/800/1066	Q3
1Gb	256M x4	K4T1G044QF-BC(E6/F7/E7)	60-FBGA	7.5x9.5mm	Lead free & Halogen free	667/800	Now
	128M x8	K4T1G084QF-BC(E6/F7/E7/F8)	60-FBGA	7.5x9.5mm	Lead free & Halogen free	667/800/1066	Now
	64M x16	K4T1G164QF-BC(E6/F7/E7/F8)	84-FBGA	7.5x12.5mm	Lead free & Halogen free	667/800/1066	Now
NOTES: E6 = DDR2-667 (5-5-5) F7 = DDR2-800 (6-6-6) E7 = DDR2-800 (5-5-5) F8 = DDR2-1066 (7-7-7) Voltage = 1.8V Package Type H = FBGA (Lead-free & Halogen-free) B = FBGA (Lead-free & Halogen-free, Flip Chip)							

DDR SDRAM COMPONENTS

Density	Organization	Part Number	# Pins - Package	Speed (Mbps)
512Mb	128Mx4	K4H510438J-LCB3/B0	66-TSOP	266/333
		K4H510438J-BCCC/B3	60-FBGA	333/400
	64Mx8	K4H510838J-LCCC/B3	66-TSOP	333/400
		K4H510838J-BCCC/B3	60-FBGA	333/400
	32Mx16	K4H511638J-LCCC/B3	66-TSOP	333/400
256Mb	64Mx4	K4H560438N-LCB3/B0	66-TSOP	266/333
	32Mx8	K4H560838N-LCCC/B3	66-TSOP	333/400
	16Mx16	K4H561638N-LCCC/B3	66-TSOP	333/400
128Mb	8Mx16	K4H2816380-LCCC	66-TSOP	400
NOTES: B0 = DDR266 (133MHz @ CL=2.5) A2 = DDR266 (133MHz @ Cl=2) B3 = DDR333 (166MHz @ CL=2.5) CC = DDR400 (200MHz @ CL=3)				

SDRAM COMPONENTS

Density	Organization	Part Number	# Pins - Package	Speed (Mbps)	Refresh	Remark
256Mb	64Mx4	K4S560432N-LC(L)75	54-TSOP	133	8K	EOL end of 2011
	32Mx8	K4S560832N-LC(L)75	54-TSOP	133	8K	EOL end of 2011
	16Mx16	K4S561632N-LC(L)(75/60)	54-TSOP	133/166	8K	EOL end of 2011
128Mb	16Mx8	K4S2808320-LC(L)75	54-TSOP	133	4K	EOL end of 2011
	8Mx16	K4S2816320-LC(L)(75/60)	54-TSOP	133/166	4K	EOL end of 2011
NOTES: L = Commercial Temp., Low Power For Industrial Temperature, check with SSI Marketing Voltage: 3.3V All products are Lead Free Speed: PC133 (133MHz CL=3/PC100 CL2) Banks: 4						

MOBILE DRAM COMPONENTS

Type	Density	Organization	Part Number	Package	Power	Production
MDDR	512Mb	32Mx16	K4X51163PK-FG(1)	60-FBGA	1.8V	Now
		16Mx32	K4X51323PK-8G(1)	90-FBGA	1.8V	Now
	1Gb	32Mx32	K4X1G323PF-8G(1)	90-FBGA	1.8V	Now
	2Gb	64Mx32	K4X2G323PC-8G(1)	90-FBGA	1.8V	Now
	4Gb	x32 (2CS, 2CKE)	K4X4G303PC-AG(1)	168-FBGA, 12x12 PoP, DDP	1.8V	Now
		x32 (2CS, 2CKE)	K4X4G303PC-7G(1)	240-FBGA, 14x14 PoP, DDP	1.8V	Now
LPDDR2	2Gb	1CH x32	K4P2G324EC-AG(1)	168-FBGA, 12x12 PoP	1.2V	Now
		1CH x32	K4P2G324ED-AG(1)	168-FBGA, 12x12 PoP	1.2V	Now
		2CH x32/ch	K3PE3E300M-XG(1)	216-FBGA, 12x12 PoP	1.2V	Now
	4Gb	1CH x32	K4P4G304EC-AG(1)	168-FBGA, 12x12 PoP, DDP, 64Mx32*2	1.2V	Now
		1CH x32	K4P4G154EC-FG(1)	134-FBGA, 11x11.5 PoP, DDP, 128x16*2	1.2V	Now
		1CH x32	K4P4G324EB-FG(1)	168-FBGA, 12x12 PoP, MONO, 128Mx32	1.2V	Now
		1CH x32	K4P4G324EB-AG(1)	168-FBGA, 12x12 PoP, MONO, 128Mx32	1.2V	Now
		2CH x32/ch	K3PE4E400M-XG(1)	216-FBGA, 12x12 PoP, QDP, 64Mx32*2	1.2V	Now
		2CH x32/ch	K3PE4E400A-XG(1)	240-FBGA, 14x14 PoP, QDP, 64Mx32*2	1.2V	Now
		2CH x32/ch	K3PE4E400K-XG(1)	240-FBGA, 14x14 PoP, QDP, 64Mx32*2	1.2V	Now
		2CH x32/ch	K3PE4E400M-XG(1)	216-FBGA, 12x12 PoP, QDP, 128Mx32*4	1.2V	Now
	8Gb	1CH x32	K4P8G304EB-FG(1)	134-FBGA, 11x11.5 PoP, QDP, 128x16*4	1.2V	Now
		1CH x32	K4P8G304EB-AG(1)	168-FBGA, 12x12 PoP, QDP, 128x16*4	1.2V	Now
		2CH x32/ch	K3PE7E700M-XG(1,2)	216-FBGA, 12x12 PoP, DDP, 128Mx32*2	1.2V	Now
		2CH x32/ch	K3PE7E700D-XG(1,2)	220-FBGA, 14x14 PoP, DDP, 128Mx32*2	1.2V	Now
		2CH x32/ch	K3PE7E700A-XG(1,2)	240-FBGA, 14x14 PoP, DDP, 128Mx32*2	1.2V	Now
	16Gb	2CH x32/ch	K3PE0E000M-XG(1)	216-FBGA, 12x12 PoP, QDP, 128Mx32*4	1.2V	Now
		2CH x32/ch	K3PE0E000A-XG(1)	216-FBGA, 12x12 PoP, QDP, 128Mx32*4	1.2V	Now
		1CH x32	K4PAG304EB-FG(1,2)	134-FBGA, 11x11.5 PoP, QDP	1.2V	Now

NOTES: **(1) Speed:** Mobile-DDR D8: 200MHz, CL3 C6: 166MHz, CL3 LPDDR2 C1: 800Mbps All products offered at Extended, Low, i-TCSR & PASR & DS (Temp, Power)

Mobile-SDR
60: 166MHz, CL3
75: 133MHz, CL3

GRAPHICS DRAM COMPONENTS

Type	Density	Organization	Part Number	Package	VDD/VDDQ	Speed Bin (MHz)
GDDR5	2Gb	64Mx32	K4G20325FC-HC(1)	170-FBGA	1.5/1.5V	2000/2500/3000
			K4G20325FC-HC04	170-FBGA	1.35V/1.35V	1800
			K4G20325FC-HC03	170-FBGA	1.35V/1.35V	2000
	1Gb	32Mx32	K4G10325FG-HC(1)	170-FBGA	1.5/1.5V (1.6V/1.6V)	2000/2500/(3000)
			K4G10325FG-HC04	170-FBGA	1.35V/1.35V	1800
			K4G10325FG-HC03	170-FBGA	1.35V/1.35V	2000
GDDR3	1Gb	32Mx32	K4J10324KG-HC(1)	136-FBGA	1.8V/1.8V	700/1000
	512Mb	16Mx32	K4J52324KI-HC(1)	136-FBGA	1.8/1.8V	700/800/1000
gDDR3	2Gb	128Mx16	K4W2G1646C-HC(1)	96 FBGA	1.5V/1.5V	800/933/1066
	1Gb	64Mx16	K4W1G1646G-BC(1)	96 FBGA	1.5V/1.5V	800/933/1066
gDDR2	1Gb	64Mx16	K4N1G164QF-BC(1)	84-FBGA	1.8/1.8V	400/500

NOTES: **Package** **(1) Speeds (clock cycle - speed bin)**

H: FBGA (Halogen Free & Lead Free) 03: 0.3ns (3000MHz) 5C: 0.555 (1800MHz) 1A: 1ns (1066MHz gDDR3) 14: 1.429ns (700MHz)

B: FBGA (Halogen Free & Lead Free) 04: 0.4ns (2500MHz) 08: 0.83ns (1200MHz) 11: 1.1ns (933MHz) 20: 2.0ns (500MHz)

05: 0.5ns (2000MHz) 1A: 1ns (1000MHz GDDR3) 12: 1.25ns (800MHz) 25: 2.5ns (400MHz)

COMPONENT DRAM ORDERING INFORMATION

	1	2	3	4	5	6	7	8	9	10	11
	K	4	T	XX	XX	X	X	X	X	X	XX
SAMSUNG Memory											Speed
DRAM											Temp & Power
DRAM Type											Package Type
Density											Revision
Bit Organization											Interface (VDD, VDDQ)
											Number of Internal Banks

1. Memory (K)

2. DRAM: 4

3. DRAM Type

B: DDR3 SDRAM
D: GDDR SDRAM
G: GDDR5 SDRAM
H: DDR SDRAM
J: GDDR3 SDRAM
M: Mobile SDRAM
N: SDDR2 SDRAM
S: SDRAM
T: DDR SDRAM
U: GDDR4 SDRAM
V: Mobile DDR SDRAM Power Efficient Address
W: SDDR3 SDRAM
X: Mobile DDR SDRAM
Y: XDR DRAM
Z: Value Added DRAM

4. Density

10: 1G, 8K/32ms
16: 16M, 4K/64ms
26: 128M, 4K/32ms
28: 128M, 4K/64ms
32: 32M, 2K/32ms
50: 512M, 32K/16ms
51: 512M, 8K/64ms
52: 512M, 8K/32ms
54: 256M, 16K/16ms
55: 256M, 4K/32ms
56: 256M, 8K/64ms
62: 64M, 2K/16ms
64: 64M, 4K/64ms
68: 768M, 8K/64ms
1G: 1G, 8K/64ms
2G: 2G, 8K/64ms
4G: 4G, 8K/64ms

5. Bit Organization

02: x2
04: x4
06: x4 Stack (Flexframe)
07: x8 Stack (Flexframe)

08: x8

15: x16 (2CS)

16: x16

26: x4 Stack (JEDEC Standard)

27: x8 Stack (JEDEC Standard)

30: x32 (2CS, 2CKE)

31: x32 (2CS)

32: x32

6. # of Internal Banks

2: 2 Banks

3: 4 Banks

4: 8 Banks

5: 16 Banks

7. Interface (VDD, VDDQ)

2: LVTTTL, 3.3V, 3.3V

4: LVTTTL, 2.5V, 2.5V

5: SSTL-2 1.8V, 1.8V

6: SSTL-15 1.5V, 1.5V

8: SSTL-2, 2.5V, 2.5V

A: SSTL, 2.5V, 1.8V

F: POD-15 (1.5V, 1.5V)

H: SSTL_2 DLL, 3.3V, 2.5V

M: LVTTTL, 1.8V, 1.5V

N: LVTTTL, 1.5V, 1.5V

P: LVTTTL, 1.8V, 1.8V

Q: SSTL-2 1.8V, 1.8V

R: SSTL-2, 2.8V, 2.8V

U: DRSL, 1.8V, 1.2V

8. Revision

A: 2nd Generation

B: 3rd Generation

C: 4th Generation

D: 5th Generation

E: 6th Generation

F: 7th Generation

G: 8th Generation

H: 9th Generation

I: 10th Generation

J: 11th Generation

K: 12th Generation

M: 1st Generation

N: 14th Generation

Q: 17th Generation

9. Package Type

DDR2 DRAM

L: TSOP II (Lead-free & Halogen-free)

H: FBGA (Lead-free & Halogen-free)

F: FBGA for 64Mb DDR (Lead-free & Halogen-free)

6: sTSOP II (Lead-free & Halogen-free)

T: TSOP II

N: sTSOP II

G: FBGA

U: TSOP II (Lead-free)

V: sTSOP II (Lead-free)

Z: FBGA (Lead-free)

DDR2 SDRAM

Z: FBGA (Lead-free)

J: FBGA DDP (Lead-free)

Q: FBGA QDP (Lead-free)

H: FBGA (Lead-free & Halogen-free)

M: FBGA DDP (Lead-free & Halogen-free)

E: FBGA QDP (Lead-free & Halogen-free)

T: FBGA DSP (Lead-free & Halogen-free, Thin)

DDR3 SDRAM

Z: FBGA (Lead-free)

H: FBGA (Halogen-free & Lead-free)

Graphics Memory

Q: TQFP

U: TQFP (Lead Free)

G: 84/144 FBGA

V: 144 FBGA (Lead Free)

Z: 84 FBGA(Lead Free)

T: TSOP

L: TSOP (Lead Free)

A: 136 FBGA

B: 136 FBGA(Lead Free)

H: FBGA(Hologen Free & Lead Free)

E: 100 FBGA(Hologen Free & Lead Free)

SDRAM

L TSOP II (Lead-free & Halogen-free)

N: STSOP II

T: TSOP II

U: TSOP II (Lead-free)

V: sTSOP II (Lead-free)

COMPONENT DRAM ORDERING INFORMATION

	1	2	3	4	5	6	7	8	9	10	11
	K	4	T	XX	XX	X	X	X	X	X	XX
SAMSUNG Memory											Speed
DRAM											Temp & Power
DRAM Type											Package Type
Density											Revision
Bit Organization											Interface (VDD, VDDQ)
											Number of Internal Banks

XDR DRAM

J: BOC(LF) P: BOC

Mobile DRAM**Leaded / Lead Free**

G/A: 52balls FBGA Mono

R/B: 54balls FBGA Mono

X /Z: 54balls BOC Mono

J /V: 60(72)balls FBGA Mono 0.5pitch

L /F: 60balls FBGA Mono 0.8pitch

S/D: 90balls FBGA

Monolithic (11mm x 13mm)

F/H: Smaller 90balls FBGA Mono

Y/P: 54balls CSP DDP

M/E: 90balls FBGA DDP

DDR2 SDRAM

CC: DDR2-400 (200MHz @ CL=3, tRCD=3, tRP=3)

D5: DDR2-533 (266MHz @ CL=4, tRCD=4, tRP=4)

E6: DDR2-667 (333MHz @ CL=5, tRCD=5, tRP=5)

F7: DDR2-800 (400MHz @ CL=6, tRCD=6, tRP=6)

E7: DDR2-800 (400MHz @ CL=5, tRCD=5, tRP=5)

DDR3 SDRAM

F7: DDR3-800 (400MHz @ CL=6, tRCD=6, tRP=6)

F8: DDR3-1066 (533MHz @ CL=7, tRCD=7, tRP=7)

G8: DDR3-1066 (533MHz @ CL=8, tRCD=8, tRP=8)

H9: DDR3-1333 (667MHz @ CL=9, tRCD=9, tRP=9)

K0: DDR3-1600 (800MHz @ CL=11, tRCD=11, tRP=11)

Graphics Memory

18: 1.8ns (550MHz)

04: 0.4ns (2500MHz)

20: 2.0ns (500MHz)

05: 0.5ns (2000MHz)

22: 2.2ns (450MHz)

5C: 0.56ns (1800MHz)

25: 2.5ns (400MHz)

06: 0.62ns (1600MHz)

2C: 2.66ns (375MHz)

6A: 0.66ns (1500MHz)

2A: 2.86ns (350MHz)

07: 0.71ns (1400MHz)

33: 3.3ns (300MHz)

7A: 0.77ns (1300MHz)

36: 3.6ns (275MHz)

08: 0.8ns (1200MHz)

40: 4.0ns (250MHz)

09: 0.9ns (1100MHz)

45: 4.5ns (222MHz)

1 : 1.0ns (1000MHz)

50/5A: 5.0ns (200MHz)

1 : 1.1ns (900MHz)

55: 5.5ns (183MHz)

12: 1.25ns (800MHz)

60: 6.0ns (166MHz)

14: 1.4ns (700MHz)

16: 1.6ns (600MHz)

SDRAM (Default CL=3)

50: 5.0ns (200MHz CL=3)

60: 6.0ns (166MHz CL=3)

67: 6.7ns

75: 7.5ns PC133 (133MHz CL=3)

XDR DRAM

A2: 2.4Gbps, 36ns, 16Cycles

B3: 3.2Gbps, 35ns, 20Cycles

C3: 3.2Gbps, 35ns, 24Cycles

C4: 4.0Gbps, 28ns, 24Cycles

DS: Daisychain Sample

Mobile-SDRAM

60: 166MHz, CL 3

75: 133MHz, CL 3

80: 125MHz, CL 3

1H: 105MHz, CL 2

1L: 105MHz, CL 3

15: 66MHz, CL 2 & 3

Mobile-DDR

C3: 133MHz, CL 3

C2: 100MHz, CL 3

C0: 66MHz, CL 3

Note: All of Lead-free or Halogen-free product are in compliance with RoHS

**10. Temp & Power - COMMON
(Temp, Power)**

C: Commercial, Normal (0°C – 95°C) & Normal Power

C: (Mobile Only) Commercial (-25 ~ 70°C), Normal Power

J: Commercial, Medium

L: Commercial, Low (0°C – 95°C) & Low Power

L: (Mobile Only) Commercial, Low, i-TCSR

F: Commercial, Low, i-TCSR & PASR & DS

E: Extended (-25~85°C), Normal

N: Extended, Low, i-TCSR

G: Extended, Low, i-TCSR & PASR & DS

I: Industrial, Normal (-40°C – 85°C) & Normal Power

P: Industrial, Low (-40°C – 85°C) & Low Power

H: Industrial, Low, i-TCSR & PASR & DS

11. Speed (Wafer/Chip Biz/BGD: 00)**DDR SDRAM**

CC: DDR400 (200MHz @ CL=3, tRCD=3, tRP=3)

B3: DDR333 (166MHz @ CL=2.5, tRCD=3, tRP=3) *1

A2: DDR266 (133MHz @ CL=2, tRCD=3, tRP=3)

B0: DDR266 (133MHz @ CL=2.5, tRCD=3, tRP=3)

Note 1: "B3" has compatibility with "A2" and "B0"

MODULE DRAM ORDERING INFORMATION

	1	2	3	4	5	6	7	8	9	10	11	12	13
	M	X	XX	T	XX	X	X	X	X	X	X	XX	X
SAMSUNG Memory													AMB Vendor
DIMM													Speed
Data bits													Temp & Power
DRAM Component Type													PCB Revision
Depth													Package
Number of Banks													Component Revision
Bit Organization													

1. Memory Module: M

2. DIMM Type

- 3: DIMM
- 4: SODIMM

3. Data bits

- 12: x72 184pin Low Profile Registered DIMM
- 63: x63 PC100 / PC133 μSODIMM with SPD for 144pin
- 64: x64 PC100 / PC133 SODIMM with SPD for 144pin (Intel/JEDEC)
- 66: x64 Unbuffered DIMM with SPD for 144pin/168pin (Intel/JEDEC)
- 68: x64 184pin Unbuffered DIMM
- 70: x64 200pin Unbuffered SODIMM
- 71: x64 204pin Unbuffered SODIMM
- 74: x72 /ECC Unbuffered DIMM with SPD for 168pin (Intel/JEDEC)
- 77: x72 /ECC PLL + Register DIMM with SPD for 168pin (Intel PC100)
- 78: x64 240pin Unbuffered DIMM
- 81: x72 184pin ECC unbuffered DIMM
- 83: x72 184pin Registered DIMM
- 90: x72 /ECC PLL + Register DIMM
- 91: x72 240pin ECC unbuffered DIMM
- 92: x72 240pin VLP Registered DIMM
- 93: x72 240pin Registered DIMM
- 95: x72 240pin Fully Buffered DIMM with SPD for 168pin (JEDEC PC133)

4. DRAM Component Type

- B: DDR3 SDRAM (1.5V VDD)
- L: DDR SDRAM (2.5V VDD)
- S: SDRAM
- T: DDR2 SDRAM (1.8V VDD)

5. Depth

- 09: 8M (for 128Mb/512Mb)
- 17: 16M (for 128Mb/512Mb)
- 16: 16M
- 28: 128M
- 29: 128M (for 128Mb/512Mb)
- 32: 32M
- 33: 32M (for 128Mb/512Mb)
- 51: 512M
- 52: 512M (for 512Mb/2Gb)
- 56: 256M
- 57: 256M (for 512Mb/2Gb)
- 59: 256M (for 128Mb/512Mb)
- 64: 64M
- 65: 64M (for 128Mb/512Mb)
- 1G: 1G
- 1K: 1G (for 2Gb)

6. # of Banks in Comp. & Interface

- 1: 4K/64mxRef., 4Banks & SSTL-2
- 2 : 8K/ 64ms Ref., 4Banks & SSTL-2
- 2: 4K/ 64ms Ref., 4Banks & LVTTTL (SDR Only)
- 5: 8K/ 64ms Ref., 4Banks & LVTTTL (SDR Only)
- 5: 4Banks & SSTL-1.8V
- 6: 8Banks & SSTL-1.8V

7. Bit Organization

- 0: x 4
- 3: x 8
- 4: x16
- 6: x 4 Stack (JEDEC Standard)
- 7: x 8 Stack (JEDEC Standard)
- 8: x 4 Stack
- 9: x 8 Stack

8. Component Revision

- A: 2nd Gen.
- B: 3rd Gen.
- C: 4th Gen.
- D: 5th Gen.
- E: 6th Gen.
- F: 7th Gen.
- G: 8th Gen.
- M: 1st Gen.
- Q: 17th Gen.

9. Package

- E: FBGA QDP (Lead-free & Halogen-free)
- G: FBGA
- H: FBGA (Lead-free & Halogen-free)
- J: FBGA DDP (Lead-free)
- M: FBGA DDP (Lead-free & Halogen-free)
- N: sTSOP
- Q: FBGA QDP (Lead-free)
- T: TSOP II (400mil)
- U: TSOP II (Lead-Free)
- V: sTSOP II (Lead-Free)
- Z: FBGA(Lead-free)

10. PCB Revision

- 0: Mother PCB
- 1: 1st Rev
- 2: 2nd Rev.
- 3: 3rd Rev.
- 4: 4th Rev.
- A: Parity DIMM
- S: Reduced PCB
- U: Low Profile DIMM

11. Temp & Power

- C: Commercial Temp. (0°C ~ 95°C) & Normal Power
- L: Commercial Temp. (0°C ~ 95°C) & Low Power

12. Speed

- CC: (200MHz @ CL=3, tRCD=3, tRP=3)
- D5: (266MHz @ CL=4, tRCD=4, tRP=4)
- E6: (333MHz @ CL=5, tRCD=5, tRP=5)
- F7: (400MHz @ CL=6, tRCD=6, tRP=6)
- E7: (400MHz @ CL=5, tRCD=5, tRP=5)
- F8: (533MHz @ CL=7, tRCD=7, tRP=7)
- G8: (533MHz @ CL=8, tRCD=8, tRP=8)
- H9: (667MHz @ CL=9, tRCD=9, tRP=9)
- K0: (800MHz @ CL=10, tRCD=10, tRP=10)
- 7A: (133MHz CL=3/PC100 CL2)

13. AMB Vendor for FBDIMM

- 0, 5: Intel
- 1, 6, 8: IDT
- 9: Montage

Note: All of Lead-free or Halogen-free product are in compliance with RoHS

SLC FLASH

Family	Density	Part Number	Package Type	Org.	Vol(V)	MOQ		Status
						Tray	T/R	
						-xxxx0xx	-xxx0Txx	
16Gb Based	128Gb ODP	K9QDGD8S5M-HCB*	BGA	x8	1.8	960	1000	M/P
		K9QDGD8U5M-HCB*	BGA	x8	3.3	960	1000	M/P
		K9QDGD8U5M-HCB*	BGA	x8	3.3	960	1000	M/P
	64Gb QDP	K9WCGD8S5M-HCB*	BGA	x8	1.8	960	1000	M/P
		K9WCGD8U5M-HCB*	BGA	x8	3.3	960	1000	M/P
		K9WCGD8U5M-HCB*	BGA	x8	3.3	960	1000	M/P
		K9WCGD8U5M-HIB*	BGA	x8	3.3	960	1000	M/P
	32Gb DDP	K9KBD8S1M-HCB*	BGA	x8	1.8	960	1000	M/P
		K9KBD8U1M-HCB*	BGA	x8	3.3	960	1000	M/P
		K9KBD8U1M-HIB*	BGA	x8	3.3	960	1000	M/P
		K9KBD8U1M-HCB*	BGA	x8	3.3	960	1000	M/P
		K9KBD8U1M-HIB*	BGA	x8	3.3	960	1000	M/P
	16Gb Mono	K9FAGD8U0M-HCB*	BGA	x8	3.3	960	1000	M/P
		K9FAGD8U0M-HIB*	BGA	x8	3.3	960	1000	M/P
4Gb Based	16Gb QDP	K9WAGD8U1D-SCB0	TSOP1 HF & LF	x8	3.3	960	1000	M/P
		K9WAGD8U1D-SIB0	TSOP1 HF & LF	x8	3.3	960	1000	M/P
	8Gb DDP	K9K8G08U0D-SCB0	TSOP1 HF & LF	X8	3.3	960	1000	M/P
		K9K8G08U0D-SIB0	TSOP1 HF & LF	x8	3.3	960	1000	M/P
	4Gb Mono	K9F4G08U0D-SCB0	TSOP1 HF & LF	x8	3.3	960	1000	M/P
		K9F4G08U0D-SIB0	TSOP1 HF & LF	X8	3.3	960	1000	M/P
2Gb Based	2Gb Mono	K9F2G08U0C-SCB0	TSOP-LF/HF	x8	3.3	960	1000	M/P
		K9F2G08U0C-SIB0	TSOP-LF/HF	x8	3.3	960	1000	M/P
		K9F2G08U0B-PCB0	TSOP-LF/HF	x8	3.3	960	1000	M/P
		K9F2G08U0B-PIB0	TSOP-LF/HF	x8	3.3	960	1000	M/P
1Gb Based	1Gb Mono	K9F1G08U0D-SCB0	TSOP-LF/HF	x8	3.3	960	1000	M/P
		K9F1G08U0D-SIB0	TSOP-LF/HF	x8	3.3	960	1000	M/P
		K9F1G08U0C-PCB0	TSOP-LF/HF	x8	3.3	960	1000	M/P
		K9F1G08U0C-PIB0	TSOP-LF/HF	x8	3.3	960	1000	M/P

*D=DDR and 0=SDR
Please contact your local Samsung sales representative for latest product offerings.
Note: All parts are lead free

MLC FLASH

Type	Family	Density	Technology	Part Number	Package Type	Org.	Vol(V)	MOQ		Status
								Tray -xxxx0xx	T/R -xxx0Txx	
2bit	32Gb Based	256Gb ODP	32nm Ep-MLC	K9PFGD8U5M-HCE*	BGA	x8	3.3	720	-	C/S Now
		128Gb QDP	32nm Ep-MLC	K9HGD8U5M-HCE*	BGA	x8	3.3	720	-	C/S Now
		64Gb DDP	32nm Ep-MLC	K9LCGD8U1M-HCE*	BGA	x8	3.3	720	-	C/S Now
		128Gb QDP	27nm	K9HDG08U1A-SCB*	48TSOP	x8	3.3	960	1000	MP
		64Gb DDP	27nm	K9LCG08U0A-SCB*	48TSOP	x8	3.3	960	1000	MP
		32Gb mono	27nm	K9GBG08U0A-SCB*	48TSOP	x8	3.3	960	1000	MP
	16GB Based	16Gb mono	27nm	K9GAG08U0E-SCB*	48TSOP	x8	3.3	960	1000	MP
3bit	64Gb Based	256Gb QDP	3bit_27nm DDR	K9CFGD8U1M-SCB*	TSOP	x8	3.3	960	-	C/S Now
		128Gb DDP	3bit_27nm DDR	K9BDGD8U0M-SCB*	TSOP	x8	3.3	960	-	C/S Now
		64Gb mono	3bit_27nm DDR	K9ACGD8U0M-SCB*	TSOP	x8	3.3	960	-	C/S Now

Please contact your local Samsung sales representative for latest product offerings.

Note: All parts are lead-free & halgen-free

SD and MicroSD FLASH CARDS

Application	Density
SD Cards	2GB
	4GB
	8GB
	16GB
	32GB
uSD Cards	2GB
	4GB
	8GB
	16GB
	32GB

Please contact your local Samsung sales representative for part numbers and latest product offerings.

moviNAND™ (eMMC)

Density	Part Number	Package Type	Org.	Vol (V)	Status
2GB	KLM2G1HE3F-B001xxx	11.5x13	x8	1.8/3.3	C/S-July
4GB	KLM4G1FE3A-A001xxx	12x16	x8	1.8/3.3	C/S-July
8GB	KLM8G2FEJA-A002xxx	12x16	x8	1.8/3.3	C/S MP
16GB	KLMAG4FEJA-A002xxx	12x16	x8	1.8/3.3	C/S MP
32GB	KLMBG8FEJA-A001xxx	12x16	x8	1.8/3.3	C/S MP
64GB	KLMCGAFEJA-B001xxx	14x18	x8	1.8/3.3	C/S MP

Please contact your local Samsung sales representative for part numbers and latest product offerings.

SOLID STATE DRIVES (SSD)

Interface	Size	Connector	Controller	Component	Density	Part Number
SATA II - MLC	2.5" 7mmT	Thin SATA	PM810	16Gb	64GB	MZ7PA064HMCD-01000
					128GB	MZ7PA128HMCD-01000
					256GB	MZ7PA256HMDR-01000
	2.5" 9.5mmT	Thin SATA	PM810	16Gb	64GB	MZ5PA064HMCD-01000
					128GB	MZ5PA128HMCD-01000
					256GB	MZ5PA256HMDR-01000
	mSATA	PCIe	PM810	16Gb	32GB	MZMPA032HMCD-00000
					64GB	MZMPA064HMDR-00000
					128GB	MZMPA128HMFU-00000

FLASH PRODUCT ORDERING INFORMATION

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
K	9	X	X	X	X	X	X	X	X	-	X	X	X	X
SAMSUNG Memory														Pre-Program Version
NAND Flash														Customer Bad Block
Small Classification														Temp
Density														Package
Density														---
Organization														Generation
Organization														Mode
Vcc														

1. Memory (K)

2. NAND Flash : 9

3. Small Classification

(SLC : Single Level Cell, MLC : Multi Level Cell)

7 : SLC moviNAND
 8 : MLC moviNAND
 F : SLC Normal
 G : MLC Normal
 H : MLC QDP
 K : SLC DDP
 L : MLC DDP
 M : MLC DSP
 N : SLC DSP
 P : MLC 8 Die Stack
 Q : SLC 8 Die Stack
 S : SLC Single SM
 T : SLC SINGLE (S/B)
 U : 2 Stack MSP
 W : SLC 4 Die Stack

4~5. Density

12 : 512M
 56 : 256M
 1G : 1G
 2G : 2G
 4G : 4G
 8G : 8G
 AG : 16G BG :
 32G CG : 64G
 DG : 128G
 EG : 256G
 LG : 24G
 NG : 96G
 ZG : 48G
 00 : NONE

6~7. Organization

00 : NONE
 08 : x8
 16 : x16

8. Vcc

A : 1.65V~3.6V B : 2.7V (2.5V~2.9V)
 C : 5.0V (4.5V~5.5V) D : 2.65V (2.4V~2.9V)
 E : 2.3V~3.6V R : 1.8V (1.65V~1.95V)
 Q : 1.8V (1.7V~1.95V) T : 2.4V~3.0V
 U : 2.7V~3.6V V : 3.3V (3.0V~3.6V)
 W : 2.7V~5.5V, 3.0V~5.5V 0 : NONE

9. Mode

0 : Normal
 1 : Dual nCE & Dual R/nB
 3 : Tri /CE & Tri R/B
 4 : Quad nCE & Single R/nB
 5 : Quad nCE & Quad R/nB
 9 : 1st block OTP
 A : Mask Option 1
 L : Low grade

10. Generation

M : 1st Generation
 A : 2nd Generation
 B : 3rd Generation
 C : 4th Generation
 D : 5th Generation

11. "----"

12. Package

A : COB
 B : FBGA (Halogen-Free, Lead-Free)
 C : CHIP BIZ D : 63-TBGA
 F : WSOP (Lead-Free) G : FBGA
 H : TBGA (Lead-Free)
 I : ULGA (Lead-Free) (12*17)
 J : FBGA (Lead-Free)
 L : ULGA (Lead-Free) (14*18)
 M : TLGA N : TLGA2
 P : TSOP1 (Lead-Free)
 Q : TSOP2 (Lead-Free)
 S : TSOP1 (Halogen-Free, Lead-Free)
 T : TSOP2 U : COB (MMC)
 V : WSOP W : Wafer
 Y : TSOP1 Z : WELP (Lead-Free)

13. Temp

C : Commercial I : Industrial
 0 : NONE (Containing Wafer, CHIP, BIZ, Exception handling code)

14. Customer Bad Block

B : Include Bad Block
 D : Daisychain Sample
 L : 1~5 Bad Block
 N : ini. 0 blk, add. 10 blk
 S : All Good Block
 0 : NONE (Containing Wafer, CHIP, BIZ, Exception handling code)

15. Pre-Program Version

0 : None
 Serial (1~9, A~Z)

SYNCHRONOUS SRAM SPB & SB

Density	Organization	Part Number	Package	Operating Mode	Vdd (V)	Access Time tCD (ns)	Cycle Time (MHz)	I/O Voltage (V)	Production Status	Comments
36Mb	2Mx18	K7A321830C	100-TQFP	SPB	3.3, 2.5	3.1	200	3.3, 2.5	Mass Production	2E1D
		K7B321835C	100-TQFP	SB	3.3, 2.5	7.5	118	3.3, 2.5	Mass Production	
	1Mx36	K7A323630C	100-TQFP	SPB	3.3, 2.5	3.1	200	3.3, 2.5	Mass Production	2E1D
		K7B323635C	100-TQFP	SB	3.3, 2.5	7.5	118	3.3, 2.5	Mass Production	
18Mb	1Mx36	K7A163630B	100-TQFP	SPB	3.3, 2.5	2.6, 3.5	250, 167	3.3, 2.5	Mass Production	2E1D
		K7A163631B	100-TQFP	SPB	3.3, 2.5	3.1	200	3.3, 2.5	Mass Production	2E2D
		K7B163635B	100-TQFP	SB	3.3, 2.5	7.5	117	3.3, 2.5	Mass Production	
	1Mx18	K7A161830B	100-TQFP	SPB	3.3, 2.5	2.6, 3.5	250, 167	3.3, 2.5	Mass Production	2E1D
		K7A161831B	100-TQFP	SPB	3.3, 2.5	3.1	200	3.3, 2.5	Mass Production	2E2D
		K7B161835B	100-TQFP	SB	3.3, 2.5	7.5	117	3.3, 2.5	Mass Production	
8Mb	256Kx36	K7A803609B	100-TQFP	SPB	3.3	2.6	250	3.3,2.5	Not for new designs	2E1D
		K7A803600B	100-TQFP	SPB	3.3	3.5	167	3.3,2.5	Not for new designs	2E1D
		K7B803625B	100-TQFP	SB	3.3	6.5	133	3.3,2.5	Not for new designs	
	512Kx18	K7A801809B	100-TQFP	SPB	3.3	2.6	250	3.3,2.5	Not for new designs	2E1D
		K7A801800B	100-TQFP	SPB	3.3	3.5	167	3.3,2.5	Not for new designs	2E1D
		K7B801825B	100-TQFP	SB	3.3	6.5	133	3.3,2.5	Not for new designs	
4Mb	128Kx36	K7A403609B	100-TQFP	SPB	3.3	2.4	250	3.3, 2.5	Not for new designs	2E1D
		K7A403600B	100-TQFP	SPB	3.3	3.5	167	3.3, 2.5	Not for new designs	2E1D
		K7B403625B	100-TQFP	SB	3.3	6.5	133	3.3, 2.5	Not for new designs	
		K7A403200B	100-TQFP	SPB	3.3	3.5	167	3.3, 2.5	Not for new designs	2E1D
	256Kx18	K7A401809B	100-TQFP	SPB	3.3	2.4	250	3.3, 2.5	Not for new designs	2E1D
		K7A401800B	100-TQFP	SPB	3.3	3.5	167	3.3, 2.5	Not for new designs	2E1D
		K7B401825B	100-TQFP	SB	3.3	6.5	133	3.3, 2.5	Not for new designs	

NOTES: All TQFP products are Lead Free
 2E1D = 2-cycle Enable and 1-cycle Disable
 2E2D = 2-cycle Enable and 2-cycle Disable

SPB speed recommendations: For 200MHz use 250MHz; For 133MHz use 167MHz
 SB speed recommendation: Use 7.5ns Access Time; Use 6.5ns Access Time

NtRAM

Type	Density	Organization	Part Number	Package	Operating Mode	Vdd (V)	Access Time tCD (ns)	Speed tCYC (MHz)	I/O Voltage (V)	Production Status
NtRAM	72Mb	2Mx36	K7N643645M	100-TQFP	SPB	2.5	2.6, 3.5	250, 167	2.5	Mass Production
		4Mx18	K7N641845M	100-TQFP	SPB	2.5	2.6, 3.5	250, 167	2.5	Mass Production
	36Mb	1Mx36	K7N323631C	100-TQFP, 165FBGA	SPB	3.3, 2.5	2.6, 3.5	250, 167	3.3, 2.5	Mass Production
		2Mx18	K7N321831C	100-TQFP, 165FBGA	SPB	3.3, 2.5	2.6, 3.5	250, 167	3.3, 2.5	Mass Production
		1Mx36	K7M323635C	100-TQFP	FT	3.3, 2.5	7.5	118	3.3, 2.5	Mass Production
		2Mx18	K7M321835C	100-TQFP	FT	3.3, 2.5	7.5	118	3.3, 2.5	Mass Production
	18Mb	1Mx18	K7N161831B	100-TQFP, 165FBGA	SPB	3.3, 2.5	2.6, 3.5	250, 167	3.3, 2.5	Mass Production
		512Kx36	K7N163631B	100-TQFP, 165FBGA	SPB	3.3, 2.5	2.6, 3.5	250, 167	3.3, 2.5	Mass Production
		1Mx18	K7M161835B	100-TQFP	FT (SB)	3.3	6.5	133	3.3, 2.5	Mass Production
		512Kx36	K7M163635B	100-TQFP	FT (SB)	3.3	6.5	133	3.3, 2.5	Mass Production
	8Mb	256Kx36	K7N803601B	100-TQFP	SPB	3.3	3.5	167	3.3,2.5	Not for new designs
		512Kx18	K7N801801B	100-TQFP	SPB	3.3	3.5	167	3.3,2.5	Not for new designs
		256Kx36	K7N803609B	100-TQFP	SPB	3.3	2.6	250	3.3,2.5	Not for new designs
		512Kx18	K7N801809B	100-TQFP	SPB	3.3	2.6	250	3.3,2.5	Not for new designs
		256Kx36	K7N803645B	100-TQFP	SPB	2.5	3.5	167	2.5	Not for new designs
		512Kx18	K7N801845B	100-TQFP	SPB	2.5	3.5	167	2.5	Not for new designs
		256Kx36	K7N803649B	100-TQFP	SPB	2.5	2.6	250	2.5	Not for new designs
		512Kx18	K7N801849B	100-TQFP	SPB	2.5	2.6	250	2.5	Not for new designs
		512Kx18	K7M801825B	100-TQFP	FT	3.3	6.5	133	3.3, 2.5	Not for new designs
		256Kx36	K7M803625B	100-TQFP	FT	3.3	6.5	133	3.3, 2.5	Not for new designs
	4Mb	128Kx36	K7N403609B	100-TQFP	SPB	3.3	3	200	3.3,2.5	Not for new designs
		256Kx18	K7N401809B	100-TQFP	SPB	3.3	3	200	3.3,2.5	Not for new designs
SPB and FT	4Mb	256Kx18	K7B401825B	100-TQFP	SB	3.3	6.5	133	3.3, 2.5	Not for new designs

NOTES: All TQFP products are lead free
NtRAM speed recommendations: For 200MHz use 250MHz; For 133MHz use 167MHz
NtRAM speed recommendation: Use 7.5ns Access Time use 6.5ns Access Time
Recommended SPB speeds are 250MHz and 167MHz Recommended SB Access Speed is 7.5ns

Late-Write RR SRAM

Density	Organization	Part Number	Package	Operating Mode	Vdd (V)	Access Time tCD (ns)	Speed tCYC (MHz)	I/O Voltage (V)	Production Status
32Mb	1Mx36	K7P323674C	119-BGA	SP	1.8 / 2.5V	1.6, 2.0	300,250	1.5 (Max 1.8)	Mass Production
	2Mx18	K7P321874C	119-BGA	SP	1.8 / 2.5V	1.6, 2.0	300,250	1.5 (Max 1.8)	Mass Production
8Mb	256Kx36	K7P803611B	119-BGA	SP	3.3	1.6	300	1.5 (Max.2.0)	Mass Production
	512Kx18	K7P801811B	119-BGA	SP	3.3	1.6	300	1.5 (Max.2.0)	Mass Production
	256Kx36	K7P803666B	119-BGA	SP	2.5	2	250	1.5 (Max.2.0)	Mass Production
	512Kx18	K7P801866B	119-BGA	SP	2.5	2	250	1.5 (Max.2.0)	Mass Production

DDR SYNCHRONOUS SRAM

Type	Density	Organization	Part Number	Package	Vdd (V)	Access Time tCD (ns)	Cycle Time	I/O Voltage (V)	Production Status	Comments
DDR	16Mb	512Kx36	K7D163674B	153-BGA	1.8~2.5	2.3	330, 300	1.5~1.9	Mass Production	
		1Mx18	K7D161874B	153-BGA	1.8~2.5	2.3	330, 300	1.5~1.9	Mass Production	
	8Mb	256Kx36	K7D803671B	153-BGA	2.5	1.7/1.9/2.1	333, 330, 250	1.5 (Max 2.0)	Not for new designs	
		512Kx18	K7D801871B	153-BGA	2.5	1.7/1.9/2.1	333, 330, 250	1.5 (Max 2.0)	Not for new designs	
DDR II CIO/SIO	72Mb	4Mx18	K7I641882M	165-FBGA	1.8	0.45,0.45,0.45,0.50	300,250,200,167	1.5,1.8	Mass Production	CIO-2B
			K7I641884M	165-FBGA	1.8	0.45,0.45,0.45,0.50	300,250,200,167	1.5,1.8	Mass Production	CIO-4B
			K7J641882M	165-FBGA	1.8	0.45,0.45,0.45,0.50	300,250,200,167	1.5,1.8	Mass Production	SIO-2B
		2Mx36	K7I643682M	165-FBGA	1.8	0.45,0.45,0.45,0.50	300,250,200,167	1.5,1.8	Mass Production	CIO-2B
			K7I643684M	165-FBGA	1.8	0.45,0.45,0.45,0.50	300,250,200,167	1.5,1.8	Mass Production	CIO-4B
			K7J643682M	165-FBGA	1.8	0.45,0.45,0.45,0.50	300,250,200,167	1.5,1.8	Mass Production	SIO-2B
	36Mb	2Mx18	K7I321882C	165-FBGA	1.8	0.45	300,250	1.5,1.8	Mass Production	CIO-2B
			K7I321884C	165-FBGA	1.8	0.45	300,250	1.5,1.8	Mass Production	CIO-4B
			K7J321882C	165-FBGA	1.8	0.45	300,250	1.5,1.8	Mass Production	SIO-2B
		1Mx36	K7I323682C	165-FBGA	1.8	0.45	300,250	1.5,1.8	Mass Production	CIO-2B
			K7I323684C	165-FBGA	1.8	0.45	300,250	1.5,1.8	Mass Production	CIO-4B
			K7J323682C	165-FBGA	1.8	0.45	300,250	1.5,1.8	Mass Production	SIO-2B
	18Mb	1Mx18	K7I161882B	165-FBGA	1.8	0.45,0.45,0.45,0.50	300,250,200,167	1.5,1.8	Mass Production	CIO-2B
			K7I161884B	165-FBGA	1.8	0.45,0.45,0.45,0.50	250,200,167	1.5,1.8	Mass Production	CIO-4B
			K7J161882B	165-FBGA	1.8	0.45,0.45,0.45,0.50	300,250,200,167	1.5,1.8	Mass Production	SIO-2B
		512Kx36	K7J163682B	165-FBGA	1.8	0.45,0.45,0.45,0.50	300,250,200,167	1.5,1.8	Mass Production	SIO-2B
			K7I163682B	165-FBGA	1.8	0.45,0.45,0.45,0.50	300,250,200,167	1.5,1.8	Mass Production	CIO-2B
			K7I163684B	165-FBGA	1.8	0.45,0.45,0.45,0.50	250,200,167	1.5,1.8	Mass Production	CIO-4B
DDR II+ CIO	36Mb	2Mx18	K7K3218T2C	165-FBGA	1.8	0.45	400	1.5	Mass Production	DDRII + CIO-2B, 2 clocks latency
			K7K3218U2C	165-FBGA	1.8	0.45	400	2.5	Mass Production	DDRII + CIO-2B, 2.5 clocks latency
		1Mx36	K7K3236T2C	165-FBGA	1.8	0.45	400, 333	1.5	Mass Production	DDRII + CIO-2B, 2 clocks latency
			K7K3236U2C	165-FBGA	1.8	0.45	400, 334	2.5	Mass Production	DDRII + CIO-2B, 2.5 clocks latency
	18Mb	1Mx18	K7K1618T2C	165-FBGA	1.8	0.45	400, 333	1.5	Mass Production	DDRII + CIO-2B, 2 clocks latency
			K7K1618U2C	165-FBGA	1.8	0.45	400, 334	2.5	Mass Production	DDRII + CIO-2B, 2.5 clocks latency
		512Kx36	K7K1636T2C	165-FBGA	1.8	0.45	400, 333	1.5	Mass Production	DDRII + CIO-2B, 2 clocks latency

NOTES:

2B = Burst of 2
4B = Burst of 4
SIO = Separate I/O
CIO = Common I/O

For DDR II CIO/SIO: C-die use 330, 300, or 250MHz instead of 200MHz or 167MHz using a stable DLL circuit
For DDR II+ CIO: 2-clock latency is available. A 2.5-clock latency can be supported on 18Mb at 500MHz and 36Mb at 450MHz

QDR SYNCHRONOUS SRAM

Type	Density	Organization	Part Number	Package	Vdd (V)	Access Time tCD (ns)	Cycle Time	I/O Voltage (V)	Production Status	Comments
QDR I	18Mb	1Mx18	K7Q161862B	165-FBGA	1.8v / 2.5v	2.5	167	1.5, 1.8	Mass Production	QDR I - 2B
			K7Q161864B	165-FBGA	1.8v / 2.5v	2.5	167	1.5, 1.8	Mass Production	QDR I - 4B
		512Kx36	K7Q163662B	165-FBGA	1.8v / 2.5v	2.5	167	1.5, 1.8	Mass Production	QDR I - 2B
			K7Q163664B	165-FBGA	1.8v / 2.5v	2.5	167	1.5, 1.8	Mass Production	QDR I - 4B
QDR II	72Mb	8Mx9	K7R640982M	165-FBGA	1.8	0.45, 0.45, 0.50	250, 200, 167	1.5, 1.8	Mass Production	QDR II-2B
			K7R641882M	165-FBGA	1.8	0.45, 0.45, 0.50	250, 200, 167	1.5, 1.8	Mass Production	QDR II-2B
		4Mx18	K7R641884M	165-FBGA	1.8	0.45, 0.45, 0.45, 0.50	300, 250, 200, 167	1.5, 1.8	Mass Production	QDR II-4B
			K7R643682M	165-FBGA	1.8	0.45, 0.45, 0.50	250, 200, 167	1.5, 1.8	Mass Production	QDR II-2B
	36Mb	2Mx36	K7R643684M	165-FBGA	1.8	0.45, 0.45, 0.45, 0.50	300, 250, 200, 167	1.5, 1.8	Mass Production	QDR II-4B
			K7R320982C	165-FBGA	1.8	0.45	167, 250, 200	1.5, 1.8	Mass Production	QDR II-2B
		2Mx18	K7R321882C	165-FBGA	1.8	0.45	167, 250, 200	1.5, 1.8	Mass Production	QDR II-2B
			K7R321884C	165-FBGA	1.8	0.45	200, 300, 250	1.5, 1.8	Mass Production	QDR II-4B
	18Mb	1Mx36	K7R323682C	165-FBGA	1.8	0.45	300, 250, 200	1.5, 1.8	Mass Production	QDR II-2B
			K7R323684C	165-FBGA	1.8	0.45	200, 300, 250	1.5, 1.8	Mass Production	QDR II-4B
		2Mx9	K7R160982B	165-FBGA	1.8	0.45, 0.45, 0.50	250, 200, 167	1.5, 1.8	Mass Production	QDR II - 2B
			K7R161882B	165-FBGA	1.8	0.45, 0.45, 0.50	250, 200, 167	1.5, 1.8	Mass Production	QDR II - 2B
		1Mx18	K7R161884B	165-FBGA	1.8	0.45, 0.45, 0.45, 0.50	300, 250, 200, 167	1.5, 1.8	Mass Production	QDR II - 4B
			K7R163682B	165-FBGA	1.8	0.45, 0.45, 0.50	250, 200, 167	1.5, 1.8	Mass Production	QDR II - 2B
		512Kx36	K7R163684B	165-FBGA	1.8	0.45, 0.45, 0.45, 0.50	300, 250, 200, 167	1.5, 1.8	Mass Production	QDR II - 4B
			K7S3236T4C	165-FBGA	1.8	0.45	400	1.5	Mass Production	QDR II + 4B, 2 clocks latency
QDR II+	36Mb	1Mx36	K7S3236U4C	165-FBGA	1.8	0.45	400	2.5	Mass Production	QDR II + 4B, 2.5 clocks latency
			K7S3218T4C	165-FBGA	1.8	0.45	400	1.5	Mass Production	QDR II + 4B, 2 clocks latency
		2Mx18	K7S3218U4C	165-FBGA	1.8	0.45	400	1.5	Mass Production	QDR II + 4B, 2.5 clocks latency
			K7S1618T4C	165-FBGA	1.8	0.45	400, 333	1.5	Mass Production	QDR II + 4B, 2 clocks latency
	18Mb	1Mx18	K7S1618U4C	165-FBGA	1.8	0.45	400, 333	1.5	Mass Production	QDR II + 4B, 2.5 clocks latency
		512Kx36	K7S1636U4C	165-FBGA	1.8	0.45	400, 333	1.5	Mass Production	QDR II + 4B, 2.5 clocks latency

NOTES: For QDR I, QDR II: 2B = Burst of 2, 4B = Burst of 4
For QDR II (36Mb): C-die use 300, 250MHz or 200MHz instead of 167MHz using a stable DLL circuit
For QDR II (72Mb): 2B = Burst of 2 and 250MHz or 200MHz is recommended, 4B = Burst of 4 and 300MHz or 250MHz is recommended
For QDR II+: 2-clock latency supported. 2.5-clock latency can be supported with 450MHz speed

SYNCHRONOUS SRAM ORDERING INFORMATION

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	K	7	X	X	X	X	X	X	X	X	-	X	X	X	X	X
SAMSUNG Memory																Packaging Type
Sync SRAM																Speed
Small Classification																Speed
Density																Temp, Power
Density																Package
Organization																---
Organization																Generation
Vcc, Interface, Mode																Vcc, Interface, Mode

1. Memory (K)

2. Sync SRAM: 7

3. Small Classification

- A: Sync Pipelined Burst
- B: Sync Burst
- D: Double Data Rate
- I: Double Data Rate II, Common I/O
- J: Double Data Rate, Separate I/O
- K: Double Data II+, Common I/O
- M: Sync Burst + NtRAM
- N: Sync Pipelined Burst + NtRAM
- P: Sync Pipe
- Q: Quad Data Rate I
- R: Quad Data Rate II
- S: Quad Data Rate II+

4~5. Density

80: 8M	16: 18M
40: 4M	32: 36M
64: 72M	

6~7. Organization

08: x8	09: x9
18: x18	32: x32
36: x36	

8~9. Vcc, Interface, Mode

- 00: 3.3V,LVTTL,2E1D WIDE
- 01: 3.3V,LVTTL,2E2D WIDE
- 08: 3.3V,LVTTL,2E2D Hi SPEED
- 09: 3.3V,LVTTL,Hi SPEED
- 11: 3.3V,HSTL,R-R
- 12: 3.3V,HSTL,R-L
- 14: 3.3V,HSTL,R-R Fixed ZQ
- 22: 3.3V,LVTTL,R-R
- 23: 3.3V,LVTTL,R-L
- 25: 3.3V,LVTTL,SB-FT WIDE
- 30: 1.8/2.5/3.3V,LVTTL,2E1D
- 31: 1.8/2.5/3.3V,LVTTL,2E2D
- 35: 1.8/2.5/3.3V,LVTTL,SB-FT
- 44: 2.5V,LVTTL,2E1D
- 45: 2.5V,LVTTL,2E2D

- 49: 2.5V,LVTTL,Hi SPEED
- 52: 2.5V,1.5/1.8V,HSTL,Burst2
- 54: 2.5V,1.5/1.8V,HSTL,Burst4
- 62: 2.5V/1.8V,HSTL,Burst2
- 64: 2.5V/1.8V,HSTL,Burst4
- 66: 2.5V,HSTL,R-R
- 74: 1.8V,2.5V,HSTL,All
- 82: 1.8V,HSTL,Burst2
- 84: 1.8V,HSTL,Burst4
- 88: 1.8V,HSTL,R-R
- T2: 1.8V,2Clock Latency,Burst2
- T4: 1.8V,2Clock Latency,Burst4
- U2: 1.8V,2.5Clock Latency,Burst2
- U4: 1.8V,2.5Clock Latency,Burst4

10. Generation

- M: 1st Generation
- A: 2nd Generation
- B: 3rd Generation
- C: 4th Generation
- D: 5th Generation

11. "--"

12. Package

- H: BGA,FCBGA,PBGA
- G: BGA, FCBGA, FBGA (LF)
- F: FBGA
- E: FBGA (LF)
- Q: (L)QFP
- P: (L)QFP(LF)
- C: CHIP BIZ
- W: WAFER

13. Temp, Power

- COMMON (Temp,Power)**
- 0: NONE,NONE (Containing of error handling code)
- C: Commercial,Normal
- E: Extended,Normal
- I: Industrial,Normal

WAFER, CHIP BIZ Level Division

- 0: NONE,NONE
- 1: Hot DC sort
- 2: Hot DC, selected AC sort

14~15. Speed

Sync Burst,Sync Burst + NtRAM

< Mode is R-L > (Clock Accesss Time)

65: 6.5ns	70: 7ns
75: 7.5ns	80: 8ns
85: 8.5ns	

Other Small Classification (Clock Cycle Time)

10: 100MHz	11: 117MHz
13: 133MHz	14: 138MHz
16: 166MHz	20: 200MHz
25: 250MHz	
26: 250MHz(1.75ns)	27: 275MHz
30: 300MHz	33: 333MHz
35: 350MHz	37: 375MHz
40: 400MHz(t-CYCLE)	42: 425MHz
45: 450MHz	
50: 500MHz (except Sync Pipe)	

16. Packing Type (16 digit)

- Common to all products, except of Mask ROM
- Divided into TAPE & REEL (In Mask ROM, divided into TRAY, AMMO packing separately)

Type	Packing Type	New Marking
Component	TAPE & REEL	T
	Other (Tray, Tube, Jar)	0 (Number)
	Stack	S
Component	TRAY	Y
(Mask ROM)	AMMO PACKING	A
Module	MODULE TAPE & REEL	P
	MODULE Other Packing	M

MCP: NAND + MDDR

Memory	NAND Density	DRAM Density/Organization	Voltage (NAND-DRAM)	Package
NAND & MDRAM	1Gb (x16)	256Mb (x16)	1.8V - 1.8V	130FBGA
		512Mb (x16)	1.8V - 1.8V	130FBGA
	2Gb (x16)	1Gb (x16)	1.8V - 1.8V	130FBGA/137FBGA
	2Gb (x16)	1Gb (x32)	1.8V - 1.8V	130FBGA/137FBGA
	2Gb (x16)	2Gb (x32)	1.8V - 1.8V	130FBGA
	4Gb (x16)	2Gb (x32)	1.8V - 1.8V	137FBGA
		2Gb*2 (x32, 2CS/2CKE)	1.8V - 1.8V	137FBGA
	4Gb*2 (x16)	2Gb*2 (x32, 2CS/2CKE)	1.8V - 1.8V	137FBGA

MCP: moviNAND + LPDDR2

Memory	moviNAND Density	DRAM Density/Organization	Voltage	Package
moviNAND & MDRAM	4GB	4Gb*1 (x32, 1ch, 1CS)	1.8V - 1.8V	162FBGA
		4Gb*2 (x32, 1ch, 2CS)	1.8V - 1.8V	162FBGA
	8GB	4Gb*1 (x32, 1ch, 1CS)	1.8V - 1.8V	186FBGA
	16GB	4Gb*1 (x32, 1ch, 1CS)	1.8V - 1.8V	186FBGA
		4Gb*2 (x32, 1ch, 2CS)	1.8V - 1.8V	186FBGA
	32GB	4Gb*2 (x32, 1ch, 2CS)	1.8V - 1.8V	186FBGA

MCP: moviNAND + MDDR

Memory	moviNAND Density	DRAM Density/Organization	Voltage	Package
moviNAND & MDRAM	4GB	512Mb (x32)	1.8V - 1.8V	169FBGA
		2Gb*2 (x32, 2CS/CKE)	1.8V - 1.8V	153FBGA
	8GB	512Mb (x32)	1.8V - 1.8V	169FBGA
	16GB	512Mb (x32)	1.8V - 1.8V	169FBGA
	32GB	512Mb (x32)	1.8V - 1.8V	169FBGA

MCP: NOR + UtrAM

Memory	NOR Density	UtrAM Density/Organization	Voltage	MCP Package
NOR & UtrAM	512Mb (Mux)	256Mb	1.8V - 1.8V	56FBGA
	512Mb (Demux)	128Mb	1.8V - 1.8V	84FBGA
	256Mb (Mux)	128Mb	1.8V - 1.8V	56FBGA
	256Mb (Mux)	64Mb	1.8V - 1.8V	56FBGA
	256Mb (Demux)	64Mb	1.8V - 1.8V	56FBGA
	128Mb (Mux)	64Mb	1.8V - 1.8V	52FBGA
	128Mb (Demux)	64Mb	1.8V - 1.8V	84FBGA

3.5" HARD DISK DRIVES

Family	Capacity (GB)	RPM	Interface	Buffer	Sector	Model
F3	160	7200	SATA 3.0 Gbps	8	512	HD164GJ
	250	7200	SATA 3.0 Gbps	8	512	HD254GJ
	320	7200	SATA 3.0 Gbps	8	512	HD324HJ
	160	7200	SATA 3.0 Gbps	16	512	HD163GJ
	250	7200	SATA 3.0 Gbps	16	512	HD253GJ
	320	7200	SATA 3.0 Gbps	16	512	HD323HJ
	500	7200	SATA 3.0 Gbps	16	512	HD502HJ
	750	7200	SATA 3.0 Gbps	32	512	HD754JJ
	1TB	7200	SATA 3.0 Gbps	32	512	HD103SJ
F3R	250	7200	SATA 3.0 Gbps	16	512	HE253GJ
	500	7200	SATA 3.0 Gbps	16	512	HE502HJ
	750	7200	SATA 3.0 Gbps	32	512	HE754JJ
	1 TB	7200	SATA 3.0 Gbps	32	512	HE103SJ
F4EG-3	1.5 TB	-	SATA 3.0 Gbps	32	4K	HD155UI
	2 TB	-	SATA 3.0 Gbps	32	4K	HD204UI
EcoGreen F3	250	-	SATA 3.0 Gbps	16	512	HD253GI
	320	-	SATA 3.0 Gbps	16	512	HD324HI
	500	-	SATA 3.0 Gbps	16	512	HD503HI
	750	-	SATA 3.0 Gbps	32	512	HD754JI
	1TB	-	SATA 3.0 Gbps	32	512	HD105SI
EcoGreen F2 (F2EG)	500	-	SATA 3.0 Gbps	16	512	HD502HI
	1 TB	-	SATA 3.0 Gbps	16	512	HD102SI
	1 TB	-	SATA 3.0 Gbps	32	512	HD103SI
	1.5 TB	-	SATA 3.0 Gbps	16	512	HD153UI
	1.5 TB	-	SATA 3.0 Gbps	32	512	HD154UI

2.5" HARD DISK DRIVES

Family	Capacity (GB)	RPM	Interface	Buffer	Sector	Model
M8	160	5400	SATA 3.0 Gbps	8		HN-M160MBB
	250	5400	SATA 3.0 Gbps	8		HN-M250MBB
	320	5400	SATA 3.0 Gbps	8		HN-M320MBB
	500	5400	SATA 3.0 Gbps	8		HN-M500MBB
	640	5400	SATA 3.0 Gbps	8		HN-M640MBB
	750	5400	SATA 3.0 Gbps	8		HN-M750MBB
	1TB	5400	SATA 3.0 Gbps	8		HN-M101MBB
M7E	160	5400	SATA 3.0 Gbps	8	512	HM161GI
	250	5400	SATA 3.0 Gbps	8	512	HM251HI
	320	5400	SATA 3.0 Gbps	8	512	HM321HI
	500	5400	SATA 3.0 Gbps	8	512	HM501II
	640	5400	SATA 3.0 Gbps	8	512	HM641JI
M7	160	5400	SATA 3.0 Gbps	8	512	HM161HI
	250	5400	SATA 3.0 Gbps	8	512	HM250HI
	320	5400	SATA 3.0 Gbps	8	512	HM320II
	400	5400	SATA 3.0 Gbps	8	512	HM400JI
	500	5400	SATA 3.0 Gbps	8	512	HM500JI
MT2	750	5400	SATA 3.0 Gbps	8		HM750LI
	1000	5400	SATA 3.0 Gbps	8		HM100UI
MP4	250	7200	SATA 3.0 Gbps	16		HM250HJ
	320	7200	SATA 3.0 Gbps	16		HM320HJ
	500	7200	SATA 3.0 Gbps	16		HM500JJ
	640	7200	SATA 3.0 Gbps	16		HM640JJ
M5P	160	5400	PATA	8	512	HM160HC

SOLID STATE DRIVES (SSD)

Interface	Size	Connector	Controller	Component	Density	Part Number	Comments
SATA II - MLC	2.5" 7mmT	Thin SATA	PM810	16Gb	64GB	MZ7PA064HMCD-01000	EOL Scheduled
					128GB	MZ7PA128HMCD-01000	EOL Scheduled
					256GB	MZ7PA256HMDR-01000	EOL Scheduled
	2.5" 9.5mmT	Thin SATA	PM810	16Gb	64GB	MZ5PA064HMCD-01000	EOL Scheduled
					128GB	MZ5PA128HMCD-01000	EOL Scheduled
					256GB	MZ5PA256HMDR-01000	EOL Scheduled
	mSATA	PCIe	PM810	16Gb	32GB	MZMPA032HMCD-00000	EOL Scheduled
					64GB	MZMPA064HMDR-00000	EOL Scheduled
					128GB	MZMPA128HMFU-00000	EOL Scheduled
SATA 6Gb/s	2.5" 7mmT	Thin SATA	PM830		64GB	MZ7PC064HADR-00000	Samples Q4 '11
					128GB	MZ7PC128HAFU-00000	Samples Q4 '11
					256GB	MZ7PC256HAFU-00000	Samples Q4 '11
					512GB	MZ7PC512HAGH-00000	Samples Q4 '11
	mSATA	PCIe	PM830		32GB	MZMPC032HBDC-00000	Samples Q1 '12
					64GB	MZMPC064HBDR-00000	Samples Q1 '12
					128GB	MZMPC128HBFU-00000	Samples Q1 '12
					256GB	MZMPC256HBGJ-00000	Samples Q1 '12

Please contact your local Samsung sales representative for latest product offerings

Note: All parts are lead free

BLU-RAY H/H

Interface	Speed	Type	Loading	Lightscribe	Model
SATA	BD Combo 12X	H/H	Tray	X	TS-HB43A / SH-B123A
				0	TS-HB43L / SH-B123L

BLU-RAY SLIM

Interface	Speed	Type	Loading	Lightscribe	Model
SATA	BD Combo 4X	Slim	Tray	X	SN-B043D
				0	SN-B043P

BLU-RAY WRITER SLIM EXTERNAL

Interface	Speed	Type	Loading	Lightscribe	Model
USB 2.0	BD Writer 6X	Slim	Tray	X	SE-506AB

BLU-RAY COMBO SLIM EXTERNAL

Interface	Speed	Type	Loading	Lightscribe	Model
USB 2.0	BD Combo 6X	Slim	Tray	X	SE-406AB

DVD-W H/H

Interface	Speed	Type	Loading	Lightscribe	Model
SATA	DVD Write 22X	H/H	Tray	0	SH-222AL
				X	SH-222AB

DVD-W Slim

Interface	Speed	Type	Loading	Lightscribe	Model
SATA	DVD Write 8X	Slim	Tray	X	TS-L633F / SN-S083F
				0	TS-L633J
			Slot	0	SN-208BB
				0	TS-T633P

DVD-W SLIM EXTERNAL

Interface	Speed	Type	Loading	Lightscribe	Model
USB 2.0	DVD Write 8X	Ultra Slim	Tray	X	SE-S084D
		Slim	Tray	X	SE-208AB

DID Product Classification

E-DID: Exclusive DID	SUPER NARROW	PANORAMIC DISPLAY	OUTDOOR: HIGH LUMINANCE » 1500 – 2000nit
P-DID: Performance DID	NARROW » Narrow » Black Bezel	WALL-MOUNTED » Thin/Light » (Edge LED)	LARGE FORMAT DISPLAY » 70" / 82"
B-DID: Basic DID	LANDSCAPE / PORTRAIT CONVERTIBLE		

Why DID Instead of TV?

	Commercial (DID)	Consumer (TV)
Warranty	18 months to 2 years	90 days to 1 year
Reliability	Designed for continuous use in different environments Turned on for 20 hours + Variety of temperatures & location	Designed for in-home use in controlled environment Turned on for 6-8 hours In-home living room
Picture Quality	Designed for PC signals LCD backlight covers a wider color spectrum necessary for PC source integration giving better picture quality	Designed for TV signals
Location	Can be oriented in either portrait or landscape mode	Can only be oriented in landscape mode

Product Segmentation

HEAVY USE

Product Segmentation

Type	Abbr	Warranty	Bezel	Suggested Run Time	Brightness	Usage	Applications	Pricing
E-DID	Exclusive	2 years	Narrow and Super Narrow	20 hours +	450 to 2000 nits	Heavy	Outdoor, Video Walls, Panormaic	High-price range
P-DID	Performance	2 years	Narrow	20 hours +	600/700 nits	Medium	Semi-Outdoor	Mid-price range
B-DID	Basic	18 months	Normal	12 hours	450 nits	Light	Indoor, e-Board	Low-price range; comparable to consumer panels

SAMSUNG DIGITAL INFORMATION DISPLAY (DID) PANEL LINEUP

Type	Current Model	New Model	Size	Model resolution	Bezel	Backlight	Brightness (typical)	Contrast Ratio	Response Time	Frequency	MP*	Comment
E-DID	LTI220MT01		22"	WXGA	Narrow	None	N/A	500:1	8ms	60Hz	Now	B&W Transparent LCD
	LTI220MT02		22"	WXGA	Narrow	None	N/A	500:1	8ms	60Hz	Now	Color Transparent LCD
	LTI430LA01-0		43"	1920X480	Narrow	CCFL	700 nits	3,000:1	8ms	60Hz	Now	Panoramic
	LTI430LA02		43"	1920X480	Narrow	E-LED	450 nits	3,000:1	6ms	60Hz	Now	Panoramic
	LTI460AA03		46"	HD	Narrow + Black	CCFL	1500 nits	3,000:1	8ms	60Hz	Now	High Bright
	LTI460AA04		46"	HD	Super narrow	CCFL	700 nits	3,000:1	8ms	60Hz	Now	7.3mm Active to Active
	LTI460AA05		46"	HD	Super narrow	CCFL	450 nits	4,000:1	8ms	60Hz	Now	7.3mm Active to Active
	LTI550HN01		55"	FHD	Super narrow	D-LED	700 nits	3,000:1	TBD	60Hz	Now	5.7mm Active to Active
	LTI700HD02		70"	FHD	Normal	D-LED	2000 nits	2,500:1	8ms	60Hz	Now	High Bright
P-DID	LTI400HA02		40"	FHD	Narrow	CCFL	700 nits	3,000:1	8ms	60Hz	Now	
	LTI400HA06		40"	FHD	Narrow + Black	CCFL	700 nits	3,000:1	8ms	60Hz	Now	
	LTI460HA02		46"	FHD	Narrow	CCFL	700 nits	3,500:1	8ms	60Hz	Now	
	LTI460HM03		46"	FHD	Narrow + Black	CCFL	700 nits	3,500:1	8ms	60Hz	Now	
	LTI460HJ01		46"	FHD	Narrow	E-LED	600 nits	3,000:1	10ms	120Hz	Now	
	LTI550HF02		55"	FHD	Narrow	CCFL	700 nits	4,000:1	8ms	60Hz	Now	
	LTI550HJ02		55"	FHD	Narrow	E-LED	600 nits	4,000:1	10ms	120Hz	Now	
	LTI700HD01		70"	FHD	Normal	CCFL	600 nits	2,000:1	8ms	60Hz	Now	
	LTI820HT-L01		82"	FHD	Normal	CCFL	600 nits	2,000:1	8ms	60Hz	Now	
B-DID	LTI260AP01		26"	HD	Normal	CCFL	450 nits	4,000:1	8ms	60Hz	Now	
	LTI320AP02		32"	HD	Normal	CCFL	450 nits	3,500:1	8ms	60Hz	Now	
	LTI400HM01		40"	FHD	Normal	CCFL	450 nits	4,000:1	8ms	60Hz	Now	
	LTI460HM01		46"	FHD	Normal	CCFL	450 nits	3,000:1	8ms	60Hz	Now	
	LTI700HD03		70"	FHD	Normal	CCFL	450 nits	2,000:1	8ms	60Hz	Now	E-Board; Landscape mode only
	LTI820HD03		82"	FHD	Normal	CCFL	450 nits	2,000:1	8ms	60Hz	Now	E-Board; Landscape mode only

NOTES: HD = 1366 x 768
FHD = 1920 x 1080
*MP Date subject to change

Please contact your local Samsung Rep for more information.

TABLETS



Size	PN	Mode	Resolution	H(RGB)	V	Aspect Ratio	PPI	Brightness (nits)	MP
7"	LTN070NL01	PLS	WSVGA	1024	600	16:10	170	400	Now
	LTN070AL01-0	PLS	WXGA	1280	800	16:10	216	400	9/E, 2011
10.1"	LTN101AL03-0	PLS	WXGA	1280	800	16:10	149	400	Now

NOTEBOOKS / PERSONAL COMPUTERS

Size	PN	Mode	Resolution	H(RGB)	V	Aspect Ratio	PPI	Brightness (nits)	MP
10.1"	LTN101NT07	TN	WSVGA	1024	600	17:10	118	200	Now
	LTN101NT08	TN	WSVGA	1024	600	17:10	118	200	Now
	LTN101AT03	TN	HD	1366	768	16:9	155	200	Now
11.6"	LTN116AT01	TN	HD	1366	768	16:9	135	200	Now
	LTN116AT06-4/L	TN	HD	1366	768	16:9	135	200	TBD
12.5"	LTN125AT02-3	TN	HD	1366	768	16:9	125	200	TBD
13.3"	LTN133AT	TN	HD	1366	768	16:9	118	200	TBD
14"	LTN140AT	TN	HD	1366	768	16:9	112	200	Now
15.6"	LTN156AT17	TN	HD	1366	768	16:9	100	200	Now
17.3"	LTN173KT01	TN	HD+	1600	900	16:9	106	200	Now

MONITORS

Size	PN	Mode	Resolution	H(RGB)	V	Aspect Ratio	PPI	Brightness (nits)	MP
17"	LTM170ET01	TN	SXGA	1280	1024	5:4	96	250	Now
18.5"	LTM185AT01	TN	HD	1366	768	16:9	85	250	Now
	LTM185AT05	TN	HD	1366	768	16:9	85	250	Now
19"	LTM190ET01	TN	SXGA	1280	1024	5:4	86	250	Now
20"	LTM200KT03	TN	HD+	1600	900	16:9	92	250	Now
	LTM200KT07	TN	HD+	1600	900	16:9	92	250	Now
22"	LTM220MT05	TN	WSXGA+	1680	1050	16:10	90	250	Now
	LTM220MT09	TN	WSXGA+	1680	1050	16:10	90	250	Now
23"	LTM230HT10	TN	FHD	1920	1080	16:9	96	300	Now
	LTM230HL01	PLS	FHD	1920	1080	16:9	96	300	Now
24"	LTM240CT06	TN	WUXGA	1920	1200	16:10	94	250	Now
	LTM240CL01	PLS	WUXGA	1920	1200	16:9	94	300	Now
27"	LTM270HT03	TN	FHD	1920	1080	16:9	82	300	Now
	LTM270DL02	PLS	QHD	2560	1440	16:9	109	300	Now

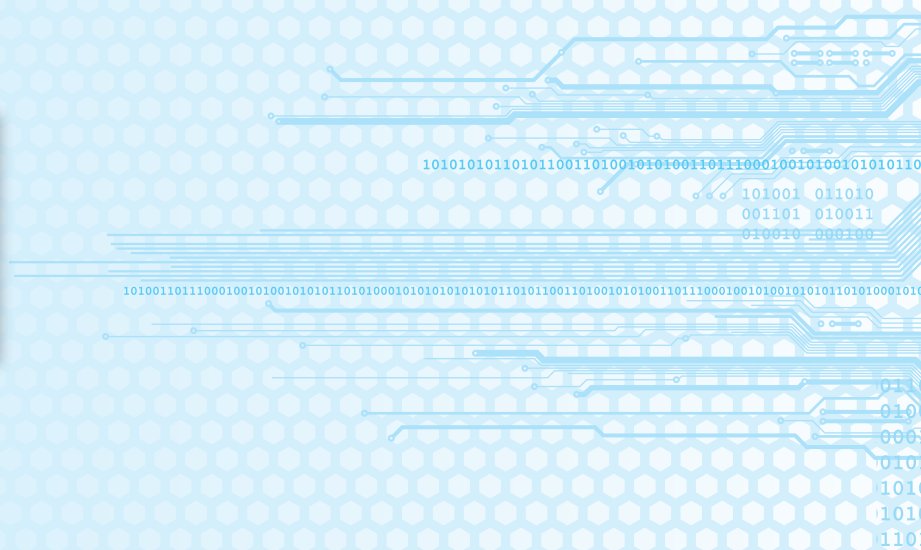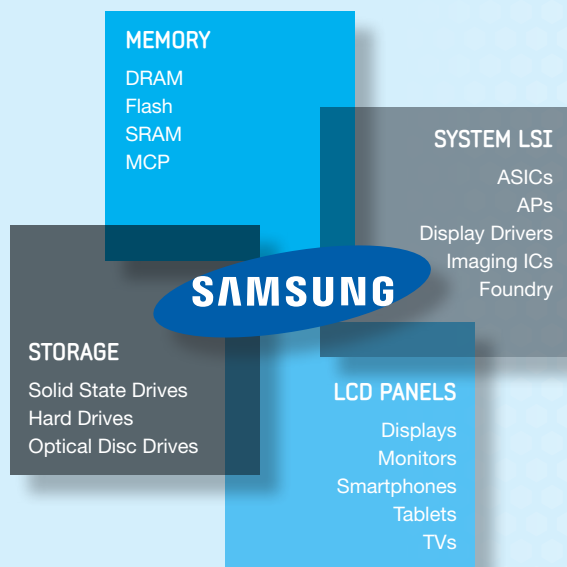

Samsung Semiconductor, Inc. >>>>>

3655 North First Street

San Jose, CA 95134-1713

samsung.com/us/oem-solutions

Disclaimer: The information in this publication has been carefully checked and is believed to be accurate at the time of publication. Samsung assumes no responsibility, however, for possible errors or omissions, or for any consequences resulting from the use of the information contained herein. Samsung reserves the right to make changes in its products or product specifications with the intent to improve function or design at any time and without notice and is not required to update this documentation to reflect such changes. This publication does not convey to a purchaser of semiconductor devices described herein any license under the patent rights of Samsung or others. Samsung makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Samsung assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation any consequential or incidental damages.

Copyright 2011. Samsung and Samsung Semiconductor, Inc. are registered trademarks of Samsung Electronics, Co., Ltd. All other names and brands may be claimed as the property of others. The appearance of all products, dates, figures, diagrams and tables are subject to change at any time, without notice.

BR-11-ALL-001 | Printed 08/11