


### Features

- Diffused Junction
- Low Reverse Leakage Current
- Low Power Loss, High Efficiency
- Surge Overload Rating to 400A Peak
- Electrically Isolated Metal Case for Maximum Heat Dissipation
- Case to Terminal Isolation Voltage 1500V
- UL Listed: Recognized Component Index, File Number E95060

### Mechanical Data

- Case: High Conductivity Metal
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Symbols Marked on Case
- Mounting: Through Hole for #10 Screw
- Mounting Torque: 8.0 Inch-pounds Maximum
- Weight: KBPC 31.6 grams (approx)
- KBPC-W 28.5 grams (approx)
- Mounting Position: Any
- Marking: Type Number

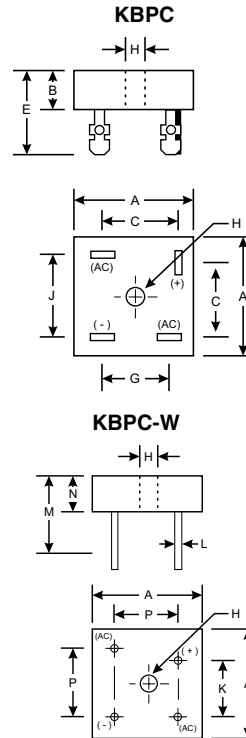

| KBPC / KBPC-W        |                    |       |
|----------------------|--------------------|-------|
| Dim                  | Min                | Max   |
| A                    | 28.40              | 28.70 |
| B                    | 10.97              | 11.23 |
| C                    | 15.50              | 17.60 |
| E                    | 22.86              | 25.40 |
| G                    | 13.30              | 15.30 |
| H                    | Hole for #10 screw |       |
|                      | 4.85Ø              | 5.59Ø |
| J                    | 17.10              | 19.10 |
| K                    | 10.40              | 12.40 |
| L                    | 0.97Ø              | 1.07Ø |
| M                    | 30.50              | —     |
| N                    | 10.97              | 11.23 |
| P                    | 17.10              | 19.10 |
| All Dimensions in mm |                    |       |

“W” Suffix Designates Wire Leads  
 No Suffix Designates Fast-on Terminals

### Maximum Ratings and Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

Single phase, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

| Characteristic                                                                                                  | Symbol                            | KBPC25005/W | KBPC2501/W | KBPC2502/W | KBPC2504/W | KBPC2506/W | KBPC2508/W | KBPC2510/W | Unit             |
|-----------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------|------------|------------|------------|------------|------------|------------|------------------|
| Peak Repetitive Reverse Voltage                                                                                 | V <sub>RRM</sub>                  | 50          | 100        | 200        | 400        | 600        | 800        | 1000       | V                |
| Working Peak Reverse Voltage                                                                                    | V <sub>RWM</sub>                  |             |            |            |            |            |            |            |                  |
| DC Blocking Voltage                                                                                             | V <sub>R</sub>                    |             |            |            |            |            |            |            |                  |
| RMS Reverse Voltage                                                                                             | V <sub>R(RMS)</sub>               | 35          | 70         | 140        | 280        | 420        | 560        | 700        | V                |
| Average Rectified Output Current @ T <sub>C</sub> = 55°C                                                        | I <sub>O</sub>                    | 25          |            |            |            |            |            |            | A                |
| Non-Repetitive Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I <sub>FSM</sub>                  | 400         |            |            |            |            |            |            | A                |
| Forward Voltage (per element) @ I <sub>F</sub> = 12.5A                                                          | V <sub>FM</sub>                   | 1.2         |            |            |            |            |            |            | V                |
| Peak Reverse Current @ T <sub>C</sub> = 25°C                                                                    | I <sub>RM</sub>                   | 10          |            |            |            |            |            |            | µA               |
| at Rated DC Blocking Voltage @ T <sub>C</sub> = 125°C                                                           |                                   | 1.0         |            |            |            |            |            |            | mA               |
| I <sup>2</sup> t Rating for Fusing (t<8.3ms) (Note 3)                                                           | I <sup>2</sup> t                  | 373         |            |            |            |            |            |            | A <sup>2</sup> s |
| Typical Junction Capacitance (Note 2)                                                                           | C <sub>j</sub>                    | 300         |            |            |            |            |            |            | pF               |
| Typical Thermal Resistance Junction to Case                                                                     | R <sub>θJC</sub>                  | 3.8         |            |            |            |            |            |            | K/W              |
| Operating and Storage Temperature Range                                                                         | T <sub>j</sub> , T <sub>STG</sub> | -65 to +150 |            |            |            |            |            |            | °C               |

- Notes:
1. Thermal resistance junction to case mounted on heatsink.
  2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
  3. Measured at non-repetitive, for t > 1.0ms and < 8.3ms.

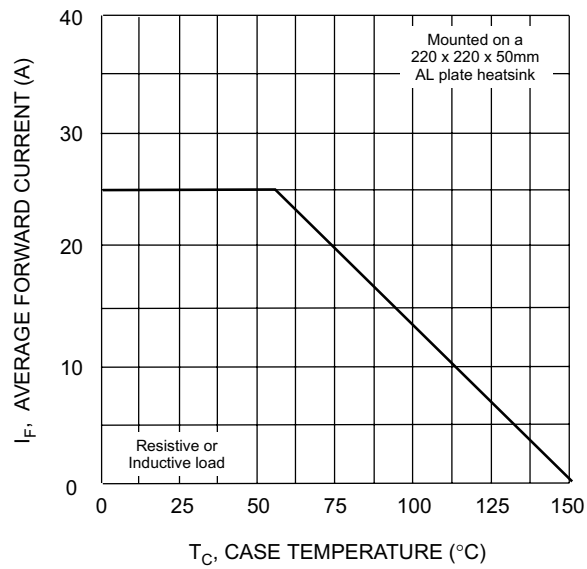


Fig. 1 Forward Current Derating Curve.

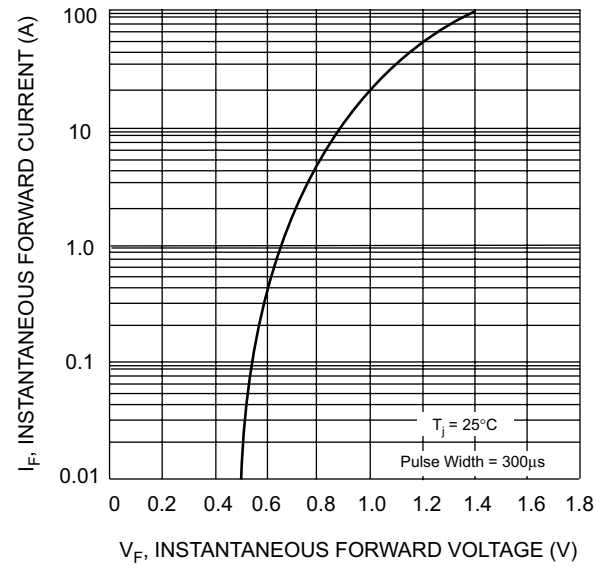


Fig. 2 Typical Forward Characteristics (per element)

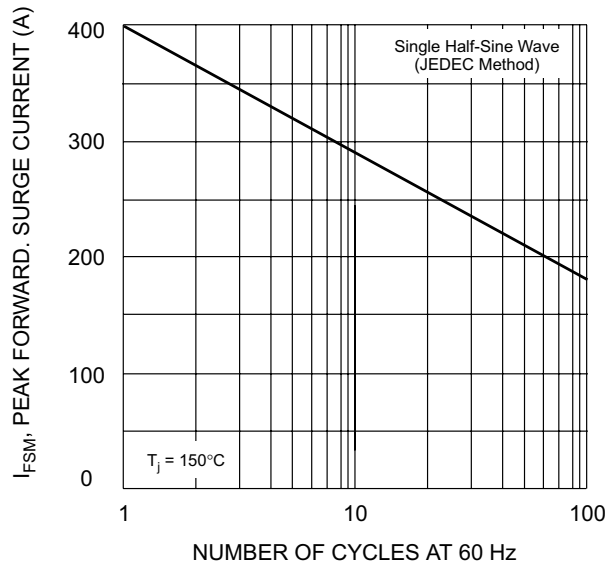


Fig. 3 Maximum Non-Repetitive Surge Current

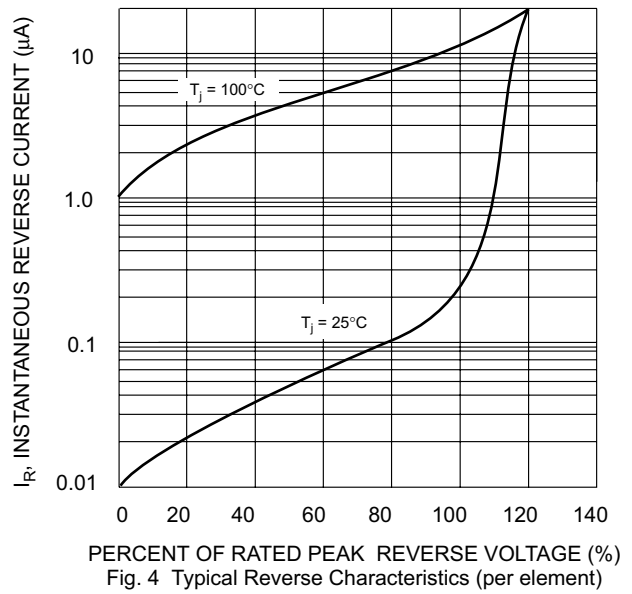


Fig. 4 Typical Reverse Characteristics (per element)