




KBU 10A/15A/25A/35A SERIES

SINGLE PHASE 10/15/25/35AMPS. SILICON BRIDGE RECTIFIERS

Voltage Range
50 to 1000 Volts
Current
10/15/25/35 Amperes

FEATURES

- UL Recognized File # E-230084
- Surge overload rating - 220 ~ 400 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has Underwriters Laboratory Flammability classification 94V-0
- Mounting Position:Any

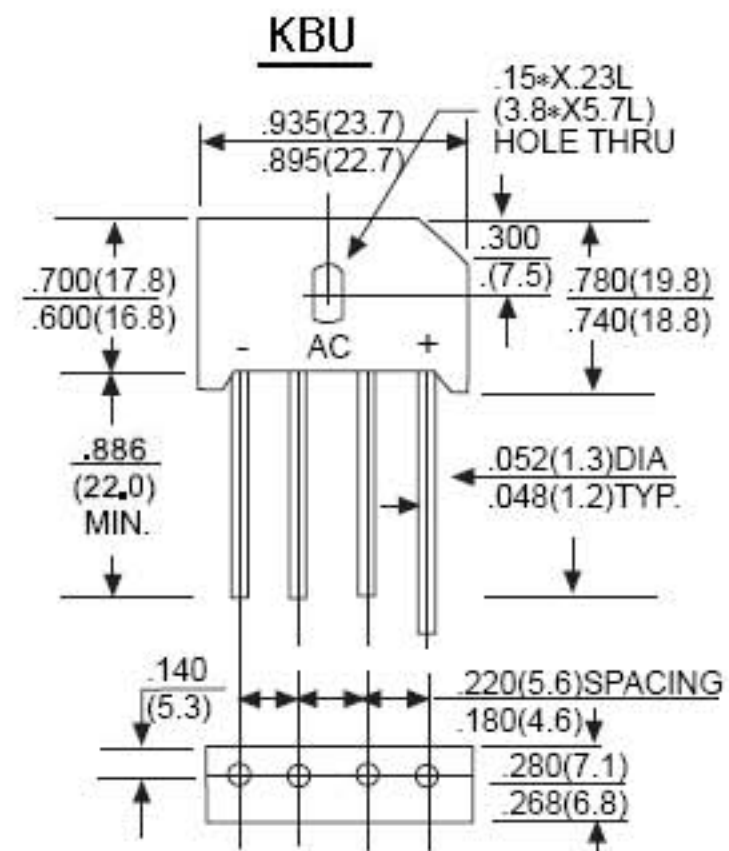

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 50Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number		KBU	KBU	KBU	KBU	KBU	KBU	KBU	UNIT	
		10005	1001	1002	1004	1006	1008	1010		
		15005	1501	1502	1504	1506	1508	1510		
		25005	2501	2502	2504	2506	2508	2510		
		35005	3501	3502	3504	3506	3508	3510		
Maximun Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V	
Maximum Average Forward (with heatsink Note 2) Rectified Current@T _C = 100 °C(without heatsink)	I _{F(AV)}	15.0 3.2							A	
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load (JEDEC Method)	I _{FSM}	10A 15A 25A 35A	250 300 400 400							A
Maximum Instantaneous Forward Voltage Drop Per Leg@5.0A/7.5A/12.5A/17.5A	V _F	1.1							V	
Maximun DC Reverse Current at Rated DC Blocking Voltage	I _R	T _J = 25°C T _J = 125°C 10 500							uA	
I ² t Rating for fusing (t<8.3ms)	I ² t	240							A²S	
Typical Junction Capacitance per element (Note 1)	C _J	60							pF	
Typical Thermal Resistance (Note 2)	R _{Jc}	0.8							°C/W	
Operating Temperature Range	T _J	-55 to+150							°C	
Storage Temperature Range	T _{STG}	-55 to+150							°C	

NOTES: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2. Device mounted on 300mm x 300mm x 1.6mm Cu Plate Heatsink.

RATING AND CHARACTERISTIC CURVES
KBU 10A/15A/25A/35A SERIES



FIG.1 -MAXIMUN FORWARD SURGE CURRENT

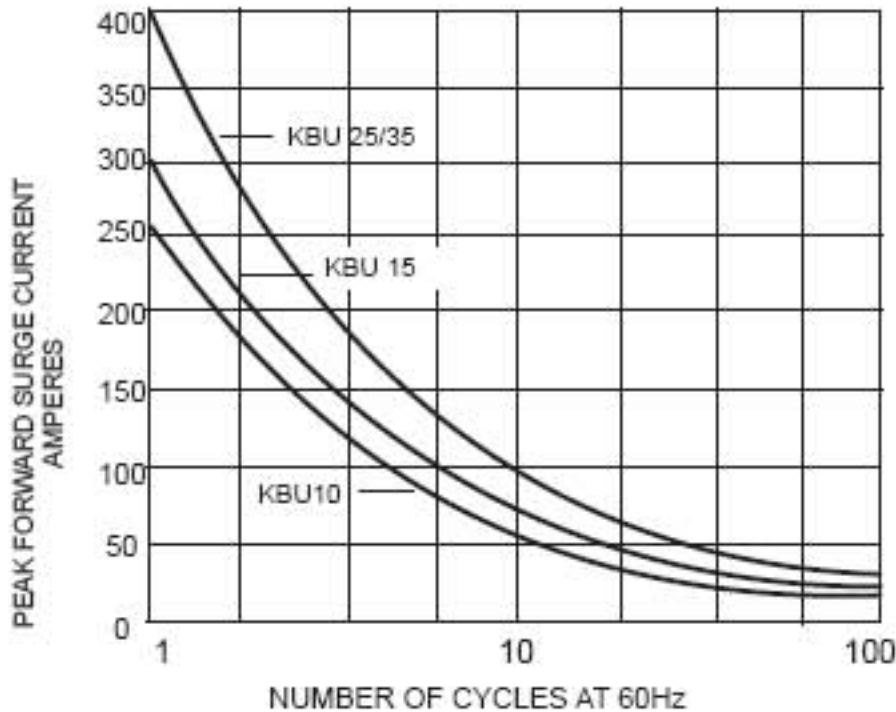


FIG.2 -DERATING CURVE
OUTPUT RECTIFIED CURRENT

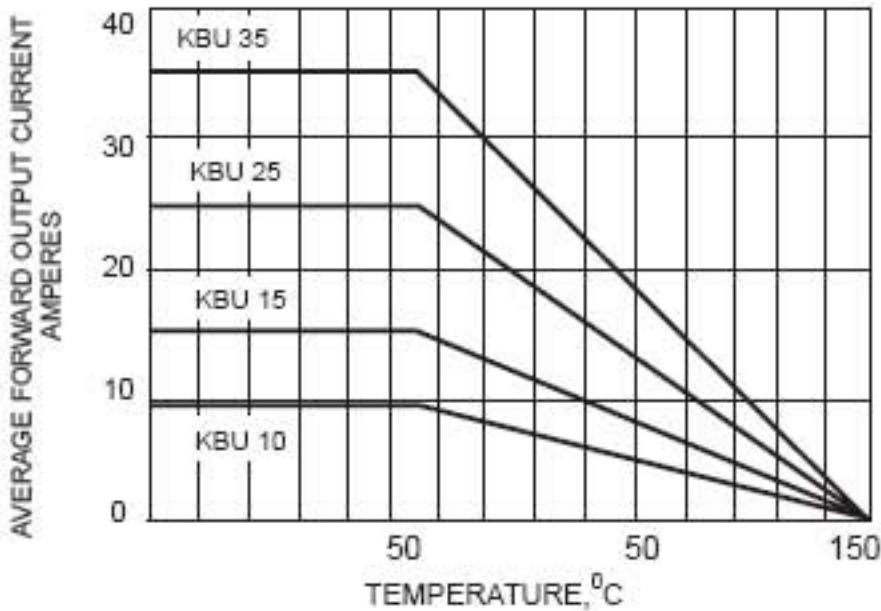


FIG.3 - TYPICAL FORWARD
CHARACTERISTICS

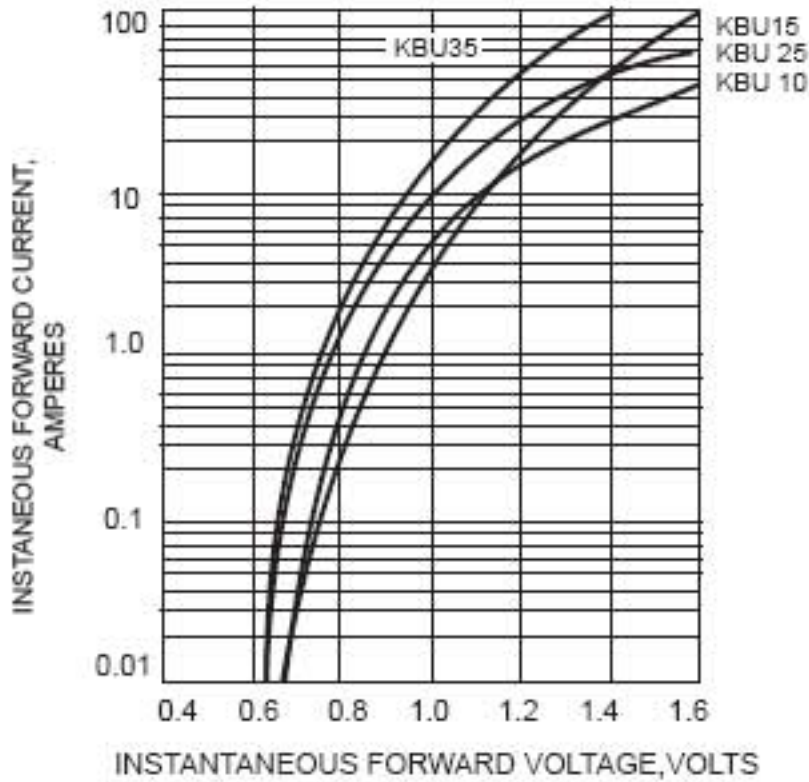


FIG.4 - TYPICAL REVERSE
CHARACTERISTICS

