

Magnetic Buzzer

Magnetic Transducer(External Circuitry Type)
SMD Type

KSSGJ4B20

PRINT


Shape

KSSGJ4B20



Rated Voltage (Vo-p)	3.6
Operating Voltage Range(Vo-p)	3.0 ~ 5.0
Current Consumption (mA)	Max. 80
Coil Resistance(Ω)	20±3
Sound Pressure Level (dBA)	Min. 90dBA (Typical 97)@5cm
Rated Frequency(Hz)	2730
Operating Temperature ()	-30 ~ +70
Storage Temperature ()	-40 ~ +85
Weight (Gram)	0.7
Material	L.C.P. (White)

Dimension

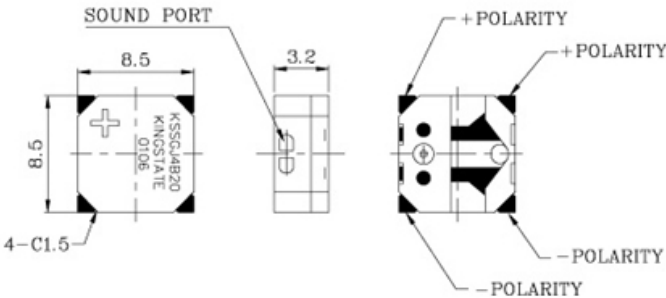

Tape & Reel Packaging
1 Reel : 1000PCS

Tol : ±0.5 Unit : mm

Characteristic / Schematic Diagram

Part Number Search

Hot Product



Piezo Audio
Transducer(External
Circuitry Type)-SMD
Type

Φ10 x H3.1mm

[More info](#)



Piezo Indicator(Internal
Circuitry Type)-Panel
Mounting Type

Φ40.0xH28.5mm

[More info](#)


NEWS

【electronica
2010】 Hall B6, Booth
No.118 **NEW** [..More
info](#)

【TAITRONICS
2010】 Taipei World
Trade Center
Nangang Exhibition
Hall, Booth
No.L1019/1021 **NEW**
[..More info](#)

KINGSTATE
announces the
partnership with
Denmark-based
company- AM3D **NEW**

[..More info](#)

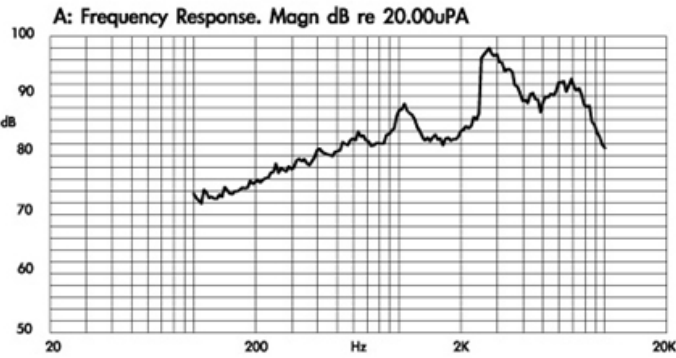

[Back](#)

[TOP](#)

[About Kingstate](#) | [Products](#) | [News](#) | [Investor Relations](#) | [Agent Only](#) | [Career](#) | [Contact Us](#) | [Site Map](#) | [KingState JPN](#)

Copyright 2007. Kingstate Electronics Corp. All Rights Reserved
10F, No.69-11, Sec.2, Chung Cheng E. Rd., Tamshui, Taipei County, Taiwan, R.O.C.
TEL: +886-2-2809-5651 FAX: +886-2-2809-7151