




# Crocodile Clips


M  
I  
S  
C  
E  
L  
L  
A  
N  
E  
O  
U  
S

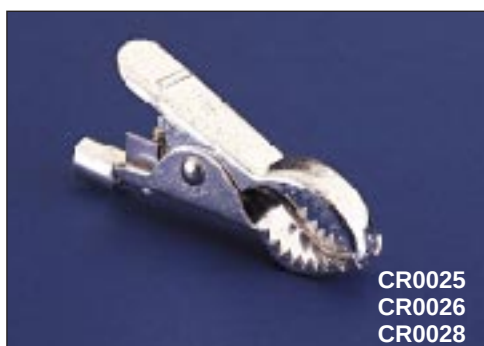


| Data \ List No. | CR0005, CR0043.                                                                           | CR0007, CR0008.                                                       | CR0018                                                           |
|-----------------|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|------------------------------------------------------------------|
| Type:           | General Purpose, non-insulated.                                                           | General Purpose with coloured sleeves.<br>CR0007: Red, CR0008: Black. | Heavy Duty, straight jaws.                                       |
| Max. Rating:    | 5A.                                                                                       | 5A.                                                                   | 25A.                                                             |
| Material:       | <b>CR0005</b> Steel, Bright Zinc Passivated.<br><b>CR0043</b> Nickel \Bright Self-Finish. | Clip: Steel, Bright Zinc Passivated.<br>Sleeves: PVC.                 | Steel, Tin Dipped.                                               |
| Size:           | Overall length 42.0, jaws grip Ø8.4.                                                      | Overall length 44.0, jaws grip Ø6.0.                                  | Overall length 58.7, jaws grip Ø12.7.                            |
| Data \ List No. | CR0025, CR0026, CR0028.                                                                   | CR0041.                                                               | CR0060                                                           |
| Type:           | Heavy Duty, curved jaws. CR0025 “-”,<br>CR0026 “+”, CR0028 unmarked.                      | Fine Wire Clip.                                                       | 2 Terminal Clip, for 4 terminal<br>bridge application.           |
| Max. Rating:    | 25A.                                                                                      | 5A.                                                                   | 10A.                                                             |
| Size:           | Overall length 58.7 jaws grip Ø14.5<br>(at point of jaw). Ø19.0 (at centre).              | Overall length 42.0.                                                  | Overall Length: 42.0. Jaws Grip: Ø8.0.                           |
| Material:       | Steel, Tin Dipped.                                                                        | Nickel Silver, Self Finish.                                           | Moulding: Glass Filled Nylon.<br>Contacts: Brass, Silver Plated. |




TX0100

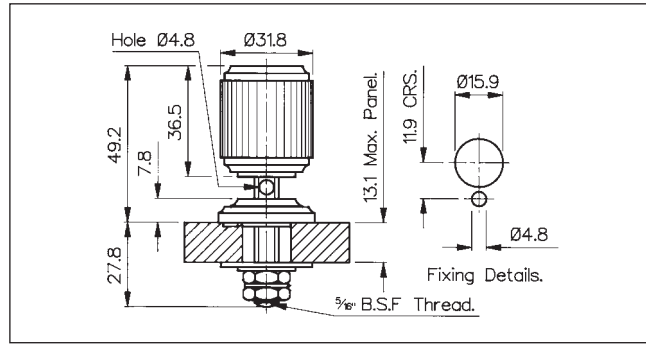





TX0101

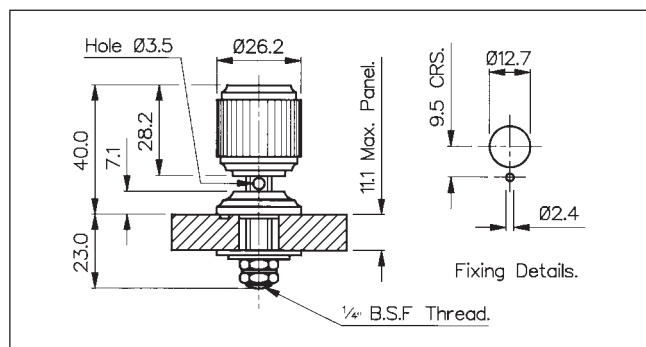


TX0102

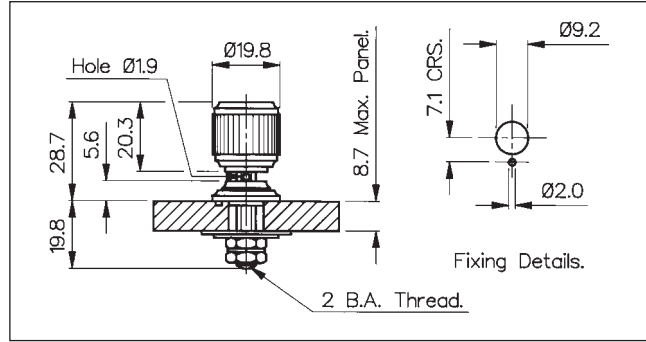

| Data \ List No.    | TX0100                                                                                                                  | TX0101                                                                                                                  | TX0102                                                                                                                  |
|--------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Type:              | Black, non-captive head.<br>Insulated from panel.                                                                       | Black, non-captive head.<br>Insulated from panel.                                                                       | Black, non-captive head.<br>Insulated from panel.                                                                       |
| Max. Rating:       | 60A.                                                                                                                    | 30A.                                                                                                                    | 15A.                                                                                                                    |
| Breakdown Voltage: | 3.5kV a.c. (to panel)                                                                                                   | 3kV a.c. (to panel)                                                                                                     | 2kV a.c. (to panel)                                                                                                     |
| Temperature Range: | -20°C to + 60°C.                                                                                                        | -20°C to + 60°C.                                                                                                        | -20°C to + 60°C.                                                                                                        |
| Material:          | Moulding: High Impact Polystyrene.<br>Terminal Head Insert: Brass, Self Finish.<br>Washer Insert: Brass, Nickel Plated. | Moulding: High Impact Polystyrene.<br>Terminal Head Insert: Brass, Self Finish.<br>Washer Insert: Brass, Nickel Plated. | Moulding: High Impact Polystyrene.<br>Terminal Head Insert: Brass, Self Finish.<br>Washer Insert: Brass, Nickel Plated. |
| Variants:          | For Red add /RD to List No.                                                                                             | For Red add /RD to List No.                                                                                             | For Red add /RD to List No.                                                                                             |

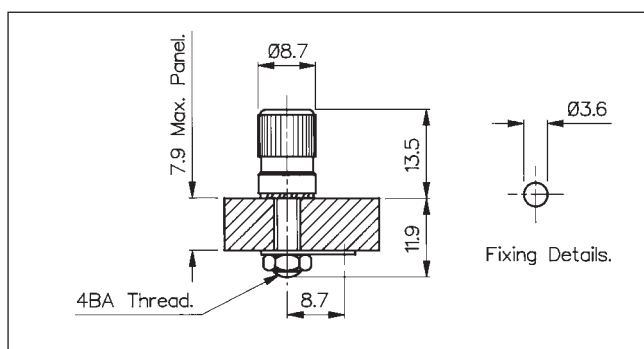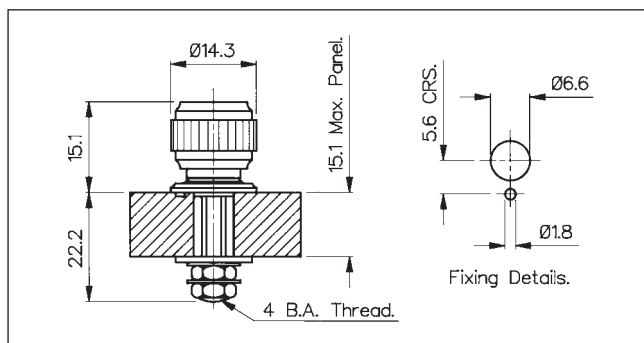

| Data \ List No.    | TX0103                                                                                                                  | TX0002                                                                                   | PNo. 268, PNo. 4035                                                                                   |
|--------------------|-------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Type:              | Black, non-captive head.<br>Insulated from panel.                                                                       | Black, non-captive head.<br>LIVE to panel.                                               | Moulded terminal head.<br><b>PNo. 268</b> - black, 4BA thread.<br><b>PNo. 4035</b> - red, 6BA thread. |
| Max. Rating:       | 7.5A.                                                                                                                   | 5A.                                                                                      |                                                                                                       |
| Breakdown Voltage: | 1kV a.c. (to panel).                                                                                                    |                                                                                          |                                                                                                       |
| Temperature Range: | -20°C to + 60°C.                                                                                                        |                                                                                          |                                                                                                       |
| Material:          | Moulding: High Impact Polystyrene.<br>Terminal Head Insert: Brass, Self Finish.<br>Washer Insert: Brass, Nickel Plated. | Moulding: Phenolic.<br>Stem and Collar: Brass, Nickel Plated.<br>Tag: Brass, Tin Plated. | Moulding: Phenolic.<br>Insert: Brass, Self Finish.                                                    |
| Variants:          | For Red add /RD to List No.                                                                                             | Insulating washer P.No.834 (flat).                                                       |                                                                                                       |

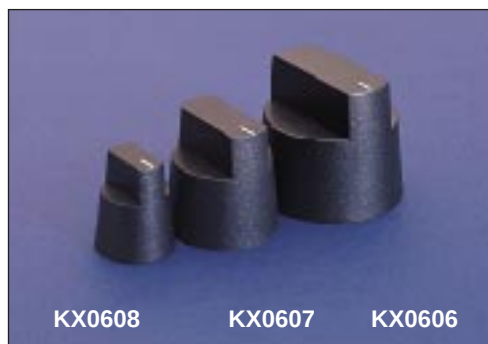

| Data \ List No.    | KX0606                                                                            | KX0607                     | KX0608                     | KX0370                     | KX0370 & KX0372            |  |
|--------------------|-----------------------------------------------------------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|--|
| Ø:                 | 14.0                                                                              | 21.0                       | 28.1                       | 31.8                       | 47.6                       |  |
| Height:            | 16.5                                                                              | 20.3                       | 24.1                       | 14.3                       | 17.5                       |  |
| Shaft:             | Ø: 6.4<br>Length: 8.9                                                             | Ø: 6.4<br>Length: 9.3      | Ø: 6.4<br>Length: 22.6     | Ø: 6.4<br>Length: 9.5      | Ø: 6.4<br>Length: 12.8     |  |
| Nut Recess:        | Ø: 11.0<br>Depth: 2.4                                                             | Ø: 17.5<br>Depth: 2.8      | Ø: 24.5<br>Depth: 2.8      |                            | Ø: 18.3<br>Depth: 3.2      |  |
| Radius to Pointer: |                                                                                   |                            |                            | 19.8                       |                            |  |
| Fixing:            | Slotted head grub screw. (Allen key to agreed order).                             |                            |                            |                            |                            |  |
| Mouldings:         | Thermoplastic.                                                                    | Thermoplastic.             | Thermoplastic.             | Phenolic.                  | Phenolic.                  |  |
| Inserts:           | Brass,<br>Nickel Plated.                                                          | Brass,<br>Nickel Plated.   | Brass,<br>Nickel Plated.   | Brass,<br>Nickel Plated.   | Brass,<br>Nickel Plated.   |  |
| Grub Screws:       | Steel,<br>Zinc Passivated.                                                        | Steel,<br>Zinc Passivated. | Steel,<br>Zinc Passivated. | Steel,<br>Zinc Passivated. | Steel,<br>Zinc Passivated. |  |
| Variants:          | Other shafts, colours and indicator lines (/IL) may be available to agreed order. |                            |                            |                            |                            |  |



# Grub Screw & Collet Fixing

M  
I  
S  
C  
E  
L  
L  
A  
N  
E  
O  
U  
S



KX0107



KX0357



| Data               | List No. | KX0107                                                                               | KX0357                     |  |  |  |  |
|--------------------|----------|--------------------------------------------------------------------------------------|----------------------------|--|--|--|--|
| Ø:                 |          |                                                                                      |                            |  |  |  |  |
| Height:            |          | 12.7                                                                                 | 15.9                       |  |  |  |  |
| Shaft:             |          | Ø: 6.4<br>Length: 9.5                                                                | Ø: 6.4<br>Length: 11.9     |  |  |  |  |
| Nut Recess:        |          | Ø: 14.3<br>Depth: 1.6                                                                | Ø: 15.9<br>Depth: 2.4      |  |  |  |  |
| Radius to Pointer: |          | 15.9                                                                                 | 15.9                       |  |  |  |  |
| Decor Discs:       |          |                                                                                      |                            |  |  |  |  |
| Fixing:            |          | Slotted head grub screw.<br>(Allen key to agreed order).                             |                            |  |  |  |  |
| Mouldings:         |          | Phenolic.                                                                            | Phenolic.                  |  |  |  |  |
| Inserts:           |          | Brass,<br>Nickel Plated.                                                             | Brass,<br>Nickel Plated.   |  |  |  |  |
| Grub Screws:       |          | Steel,<br>Zinc Passivated.                                                           | Steel,<br>Zinc Passivated. |  |  |  |  |
| Variants:          |          | Other shafts, colours and indicator lines (/IL) may be<br>available to agreed order. |                            |  |  |  |  |