




# LUXEON UV FC Line

Unique LED enabling limitless design freedom

With FlipChip platform technology, LUXEON UV FC Line contains both 1mm<sup>2</sup> and 2mm<sup>2</sup> die sizes and is the smallest and highest power density (W/cm<sup>2</sup>) ultraviolet with FlipChip Technology in a Chip Scale Package (CSP) LED that can be reflowed onto a substrate with standard surface mount (SMT) equipment and process. LUXEON UV FC Line LEDs enable tighter beam control and high packing density of LEDs on a chip on board solution and completely eliminate wire bonds in the system. LUXEON UV FC Line is the ideal choice for cost sensitive applications to achieve high irradiance at high current density, maximizing W/\$ by taking advantage of lowest thermal resistance of a CSP device.

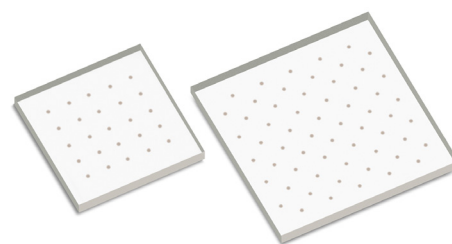

## FEATURES AND BENEFITS

Ultraviolet wavelength range of 380nm to 420nm for a range of options

Micro sized CSP: 1.0mm<sup>2</sup> and 2.0mm<sup>2</sup> package for design flexibility and packing density

No wire bonds allows for direct attach and reflow

5-sided emitter with batwing radiation pattern

Low thermal resistance for leading system level W/\$

Maximum drive current of 1A/mm<sup>2</sup> delivers superior flux for reduced LED count

## PRIMARY APPLICATIONS

Specialty Lighting

- Analytical Instrumentation
- Curing
- Medical
- Security

# Table of Contents

|                                             |           |
|---------------------------------------------|-----------|
| <b>General Product Information</b>          | <b>2</b>  |
| Product Test Conditions                     | 2         |
| Part Number Nomenclature                    | 2         |
| Lumen Maintenance                           | 2         |
| Environmental Compliance                    | 2         |
| <b>Performance Characteristics</b>          | <b>3</b>  |
| Product Selection Guide                     | 3         |
| Optical Characteristics                     | 3         |
| Electrical and Thermal Characteristics      | 4         |
| <b>Absolute Maximum Ratings</b>             | <b>4</b>  |
| <b>Characteristic Curves</b>                | <b>5</b>  |
| Spectral Power Distribution Characteristics | 5         |
| Light Output Characteristics                | 5         |
| Forward Current Characteristics             | 7         |
| Wavelength Shift                            | 9         |
| Radiation Pattern Characteristics           | 12        |
| <b>Product Bin and Labeling Definitions</b> | <b>13</b> |
| Decoding Product Bin Labeling               | 13        |
| Radiometric Power Bins                      | 14        |
| Peak Wavelength Bins                        | 14        |
| <b>Forward Voltage Bins</b>                 | <b>15</b> |
| <b>Mechanical Dimensions</b>                | <b>16</b> |
| <b>Reflow Soldering Guidelines</b>          | <b>17</b> |
| JEDEC Moisture Sensitivity                  | 17        |
| Solder Pad Design                           | 18        |
| <b>Packaging Information</b>                | <b>19</b> |
| Pocket Tape Dimensions                      | 19        |
| Reel Dimensions                             | 19        |

# General Product Information

## Product Test Conditions

LUXEON UV FC Line LEDs are tested and binned with a DC drive current of 500mA for LUXEON UV FC1 and 1000mA for LUXEON UV FC2 at a junction temperature,  $T_j$ , of 25°C.

## Part Number Nomenclature

Part numbers for LUXEON UV FC Line follow the convention below:

L **A** F 3 – U **B B B C** 0 0 0 **D D D D** 1

Where:

- A** – designates packing type (0=bin tape, 1=tape and reel)
- B B B** – designates minimum peak wavelength (380=380nm, 390=390nm, 400=400nm, 410=410nm)
- C** – designates product name and die size (1=LUXEON UV FC1 with 1mm<sup>2</sup> die size, 2=LUXEON UV FC2 with 2mm<sup>2</sup> die size)
- D D D D** – designates minimum radiometric power (0300=300mW, 0350=350mW, 0400=400mW, 0450=450mW, 1400=1400mW, 1600=1600mW, etc.)

Therefore, the following part number is used for a LUXEON UV FC1, with a 1mm<sup>2</sup> die, minimum peak wavelength of 390nm and a minimum radiometric power of 400mW on tape and reel:

L **1** F 3 – U **3 9 0 1** 0 0 0 **0 4 0 0** 1

## Lumen Maintenance

Please contact your local Sales Representative or Lumileds Technical Solutions Manager for more information about the long-term performance of this product.

## Environmental Compliance

Lumileds LLC is committed to providing environmentally friendly products to the solid-state lighting market. LUXEON UV FC Line is compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS Directive 2011/65/EU and REACH Regulation (EC) 1907/2006. Lumileds LLC will not intentionally add the following restricted materials to its products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

# Performance Characteristics

## Product Selection Guide

Table 1a. Product performance of LUXEON UV FC1 at 500mA and 1000mA,  $T_j=25^{\circ}\text{C}$ .

| PEAK WAVELENGTH <sup>[1]</sup> (nm) | TYPICAL RADIOMETRIC POWER <sup>[2]</sup> (mW) |        | PART NUMBER        |
|-------------------------------------|-----------------------------------------------|--------|--------------------|
|                                     | 500mA                                         | 1000mA |                    |
| 410–420                             | 650                                           | 1228   | LxF3-U410100006001 |
|                                     | 750                                           | 1417   | LxF3-U410100007001 |
| 400–410                             | 650                                           | 1228   | LxF3-U400100006001 |
|                                     | 750                                           | 1417   | LxF3-U400100007001 |
| 390–400                             | 550                                           | 1039   | LxF3-U390100005001 |
|                                     | 650                                           | 1228   | LxF3-U390100006001 |
|                                     | 750                                           | 1417   | LxF3-U390100007001 |
| 380–390                             | 350                                           | 661    | LxF3-U380100003001 |
|                                     | 450                                           | 850    | LxF3-U380100004001 |
|                                     | 530                                           | 1001   | LxF3-U380100005001 |

Notes for Table 1a:

1. Lumileds maintains a tolerance of  $\pm 2\text{nm}$  for peak wavelength measurements.
2. Lumileds maintains a tolerance of  $\pm 10\%$  for radiometric power measurements.

Table 1b. Product performance of LUXEON UV FC2 at 1000mA and 2000mA,  $T_j=25^{\circ}\text{C}$ .

| PEAK WAVELENGTH <sup>[1]</sup> (nm) | TYPICAL RADIOMETRIC POWER <sup>[2]</sup> (mW) |        | PART NUMBER        |
|-------------------------------------|-----------------------------------------------|--------|--------------------|
|                                     | 1000mA                                        | 2000mA |                    |
| 410–420                             | 1300                                          | 2340   | LxF3-U410200012001 |
|                                     | 1500                                          | 2700   | LxF3-U410200014001 |
| 400–410                             | 1100                                          | 1980   | LxF3-U400200010001 |
|                                     | 1300                                          | 2340   | LxF3-U400200012001 |
|                                     | 1450                                          | 2610   | LxF3-U400200014001 |
| 390–400                             | 1100                                          | 1980   | LxF3-U390200010001 |
|                                     | 1300                                          | 2340   | LxF3-U390200012001 |
| 380–390                             | 700                                           | 1260   | LxF3-U380200006001 |
|                                     | 900                                           | 1620   | LxF3-U380200008001 |
|                                     | 1050                                          | 1890   | LxF3-U380200010001 |

Notes for Table 1b:

1. Lumileds maintains a tolerance of  $\pm 2\text{nm}$  for peak wavelength measurements.
2. Lumileds maintains a tolerance of  $\pm 10\%$  for radiometric power measurements.

## Optical Characteristics

Table 2. Optical characteristics for LUXEON UV FC1 at 500mA and LUXEON UV FC2 at 1000mA,  $T_j=25^{\circ}\text{C}$ .

| PART NUMBER        | TYPICAL SPECTRAL HALF-WIDTH (nm) | TYPICAL TEMPERATURE COEFFICIENT OF PEAK WAVELENGTH (nm/ $^{\circ}\text{C}$ ) | TYPICAL TOTAL INCLUDED ANGLE <sup>[1]</sup> | TYPICAL VIEWING ANGLE <sup>[2]</sup> |
|--------------------|----------------------------------|------------------------------------------------------------------------------|---------------------------------------------|--------------------------------------|
| LxF3-U410x000xxxx1 | 13.7                             | 0.05                                                                         | 170°                                        | 140°                                 |
| LxF3-U400x000xxxx1 | 12.0                             | 0.05                                                                         | 170°                                        | 140°                                 |
| LxF3-U390x000xxxx1 | 11.0                             | 0.05                                                                         | 170°                                        | 140°                                 |
| LxF3-U380x000xxxx1 | 9.0                              | 0.05                                                                         | 170°                                        | 140°                                 |

Notes for Table 2:

1. Total angle at which 90% of total luminous flux is captured.
2. Viewing angle is the off axis angle from the LED centerline where the luminous intensity is  $\frac{1}{2}$  of the peak value.

## Electrical and Thermal Characteristics

Table 3a. Electrical and thermal characteristics for LUXEON UV FC1 at 500mA,  $T_j=25^{\circ}\text{C}$ .

| PART NUMBER         | FORWARD VOLTAGE <sup>[1]</sup> ( $V_f$ ) |         |         | TYPICAL TEMPERATURE COEFFICIENT OF FORWARD VOLTAGE <sup>[2]</sup> (mV/ $^{\circ}\text{C}$ ) | TYPICAL THERMAL RESISTANCE—JUNCTION TO SOLDER PAD ( $^{\circ}\text{C/W}$ ) |
|---------------------|------------------------------------------|---------|---------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
|                     | MINIMUM                                  | TYPICAL | MAXIMUM |                                                                                             |                                                                            |
| LxF3-U41010000xxxx1 | 2.8                                      | 3.1     | 3.4     | -2 to -3                                                                                    | 2.0                                                                        |
| LxF3-U40010000xxxx1 | 2.8                                      | 3.1     | 3.4     |                                                                                             |                                                                            |
| LxF3-U39010000xxxx1 | 2.8                                      | 3.1     | 3.4     |                                                                                             |                                                                            |
| LxF3-U38010000xxxx1 | 2.8                                      | 3.2     | 3.4     |                                                                                             |                                                                            |

**Notes for Table 3a:**

1. Lumileds maintains a tolerance of  $\pm 0.05\text{V}$  on forward voltage measurements.
2. Measured between  $25^{\circ}\text{C}$  and  $85^{\circ}\text{C}$ .

Table 3b. Electrical and thermal characteristic for LUXEON UV FC2 at 1000mA,  $T_j=25^{\circ}\text{C}$ .

| PART NUMBER        | FORWARD VOLTAGE <sup>[1]</sup> ( $V_f$ ) |         |         | TYPICAL TEMPERATURE COEFFICIENT OF FORWARD VOLTAGE <sup>[2]</sup> (mV/ $^{\circ}\text{C}$ ) | TYPICAL THERMAL RESISTANCE—JUNCTION TO SOLDER PAD ( $^{\circ}\text{C/W}$ ) |
|--------------------|------------------------------------------|---------|---------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
|                    | MINIMUM                                  | TYPICAL | MAXIMUM |                                                                                             |                                                                            |
| L0F3-U4102000xxxx1 | 2.8                                      | 3.1     | 3.4     | -1 to -2                                                                                    | 1.0                                                                        |
| L0F3-U4002000xxxx1 | 2.8                                      | 3.1     | 3.4     |                                                                                             |                                                                            |
| L0F3-U3902000xxxx1 | 2.8                                      | 3.1     | 3.4     |                                                                                             |                                                                            |
| L0F3-U3802000xxxx1 | 2.8                                      | 3.2     | 3.6     |                                                                                             |                                                                            |

**Notes for Table 3b:**

1. Lumileds maintains a tolerance of  $\pm 0.05\text{V}$  on forward voltage measurements.
2. Measured between  $25^{\circ}\text{C}$  and  $85^{\circ}\text{C}$ .

## Absolute Maximum Ratings

Table 4. Absolute maximum ratings for LUXEON UV FC Line.

| PARAMETER                                            | MAXIMUM PERFORMANCE                                                  |
|------------------------------------------------------|----------------------------------------------------------------------|
| DC Forward Current <sup>[1,2]</sup>                  | 1000mA for LUXEON UV FC1<br>2000mA for LUXEON UV FC2                 |
| Peak Pulsed Forward Current <sup>[1,3]</sup>         | 1300mA for LUXEON UV FC1<br>2600mA for LUXEON UV FC2                 |
| LED Junction Temperature <sup>[1]</sup> (DC & Pulse) | 120 $^{\circ}\text{C}$                                               |
| ESD Sensitivity (ANSI/ESDA/JEDEC JS-001-2012)        | Class 0B                                                             |
| Operating Case Temperature <sup>[1]</sup>            | -40 $^{\circ}\text{C}$ to 120 $^{\circ}\text{C}$                     |
| LED Storage Temperature                              | -40 $^{\circ}\text{C}$ to 135 $^{\circ}\text{C}$                     |
| Soldering Temperature                                | 300 $\pm$ 3 $^{\circ}\text{C}$ <sup>[4]</sup>                        |
| Allowable Reflow Cycles                              | 3                                                                    |
| Reverse Voltage ( $V_{\text{reverse}}$ )             | LUXEON UV FC Line LEDs are not designed to be driven in reverse bias |

**Notes for Table 4:**

1. Proper current derating must be observed to maintain the junction temperature below the maximum allowable junction temperature.
2. Residual periodic variations due to power conversion from alternating current (AC) to direct current (DC), also called "ripple," are acceptable if the following conditions are met:
  - The frequency of the ripple current is 100Hz or higher
  - The average current for each cycle does not exceed the maximum allowable DC forward current
  - The maximum amplitude of the ripple does not exceed 15% of the maximum allowable DC forward current
3. At 10% duty cycle with pulse width of 10ms.
4. 300 $^{\circ}\text{C}$  for AuSn (gold-tin) solder system, see [AB116](#) for more details; 260 $^{\circ}\text{C}$  for non-AuSn lead-free solder system per JEDEC J-STD-020E classification.

# Characteristic Curves

## Spectral Power Distribution Characteristics

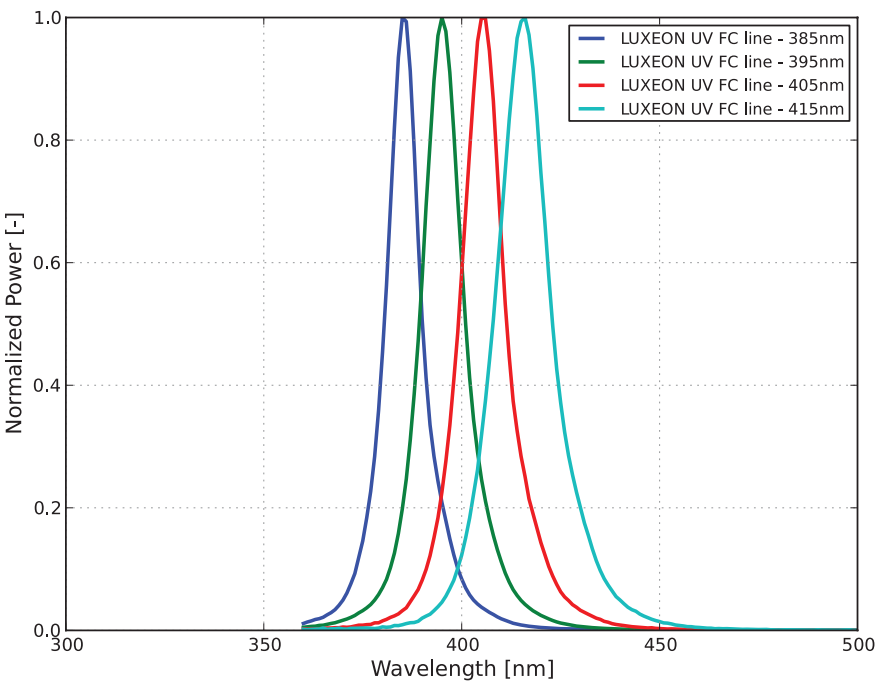


Figure 1. Typical relative radiometric power vs. wavelength for LUXEON UV FC1 at 500mA and LUXEON UV FC2 at 1000mA,  $T_j=25^{\circ}\text{C}$ .

## Light Output Characteristics

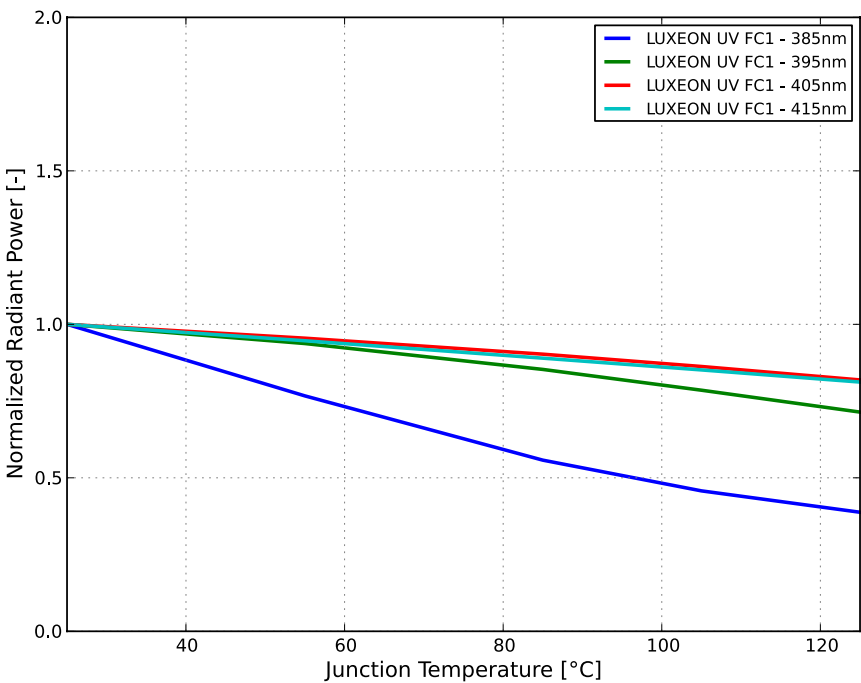


Figure 2a. Typical normalized radiant power vs. junction temperature for LUXEON UV FC1 at 500mA.

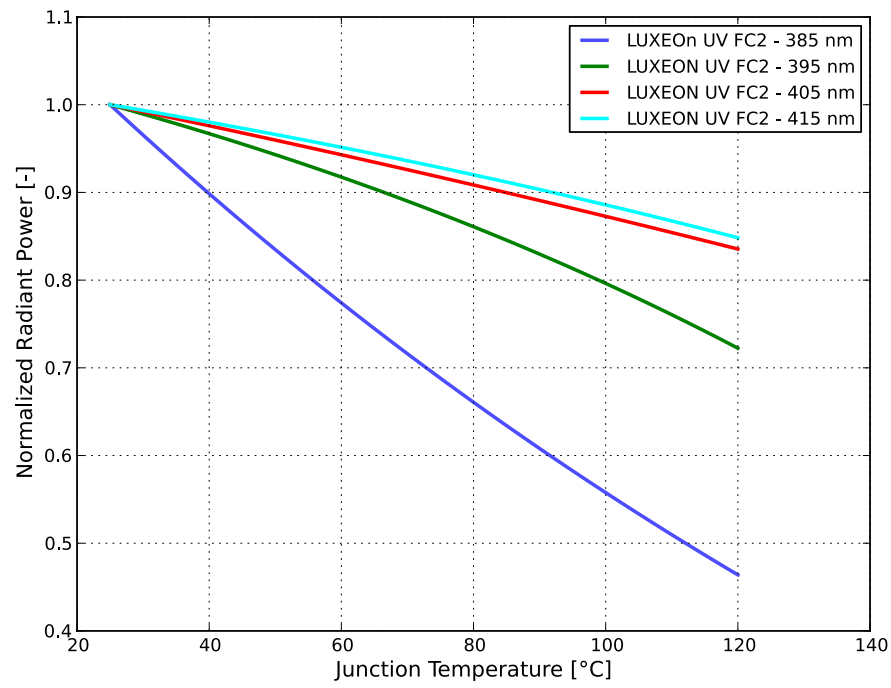


Figure 2b. Typical normalized radiant power vs, junction temperature for LUXEON UV FC2 at 1000mA.

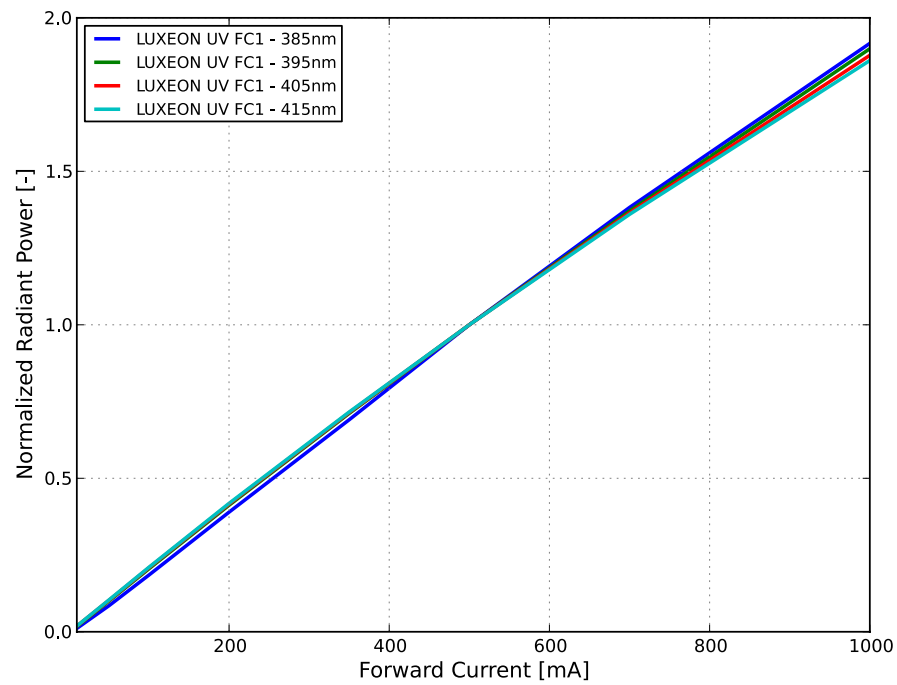


Figure 3a. Typical normalized radiometric power vs. forward current for LUXEON UV FC1 at  $T_j=25^{\circ}\text{C}$ .

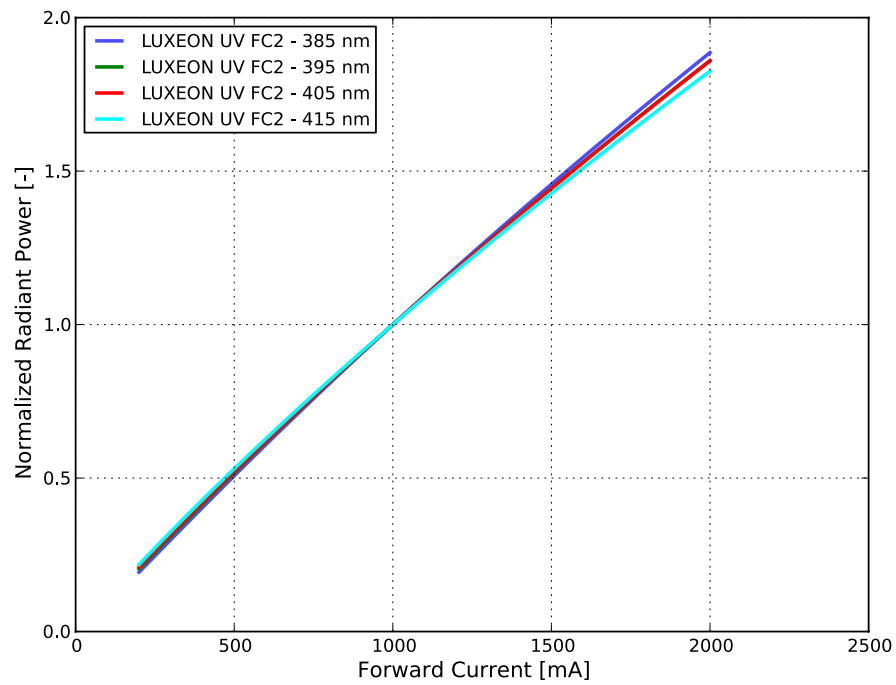


Figure 3b. Typical normalized radiometric power vs. forward current for LUXEON UV FC2 at  $T_j=25^\circ\text{C}$ .

## Forward Current Characteristics

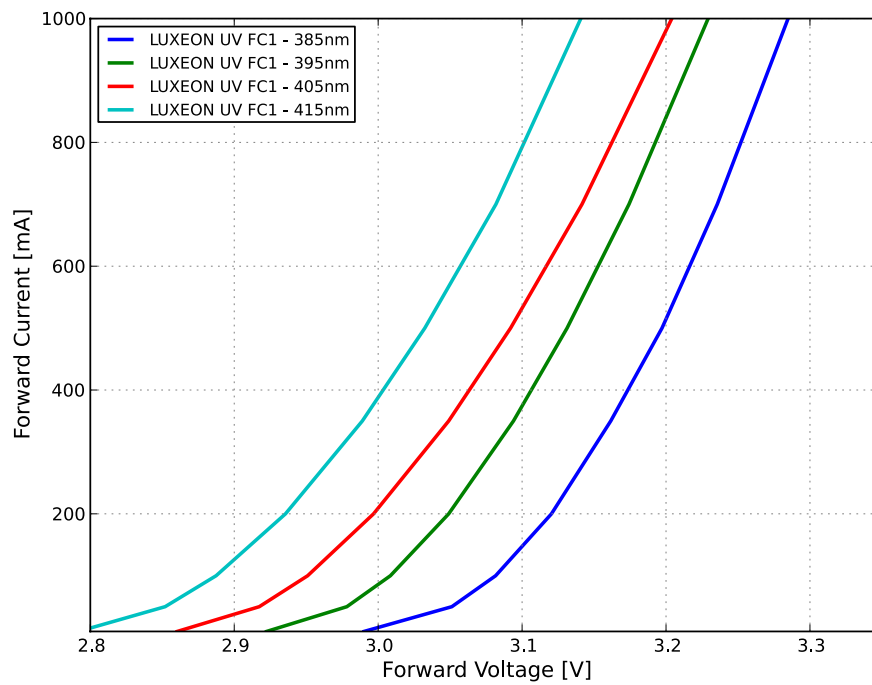


Figure 4a. Typical forward current vs. forward voltage for LUXEON UV FC1 at  $T_j=25^\circ\text{C}$ .



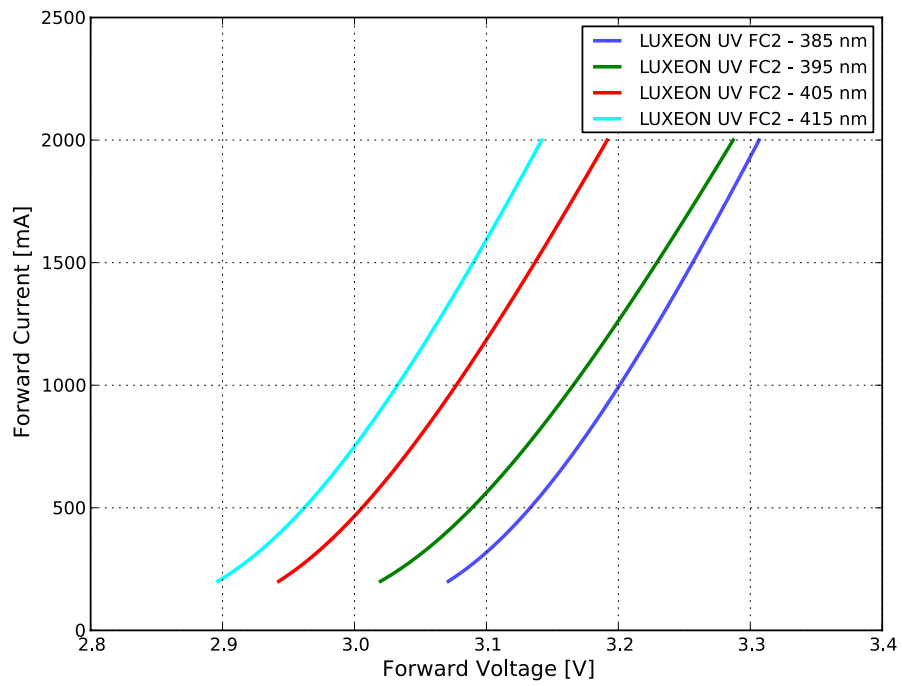


Figure 4b. Typical forward current vs. forward voltage for LUXEON UV FC2 at  $T_j = 25^\circ\text{C}$ .

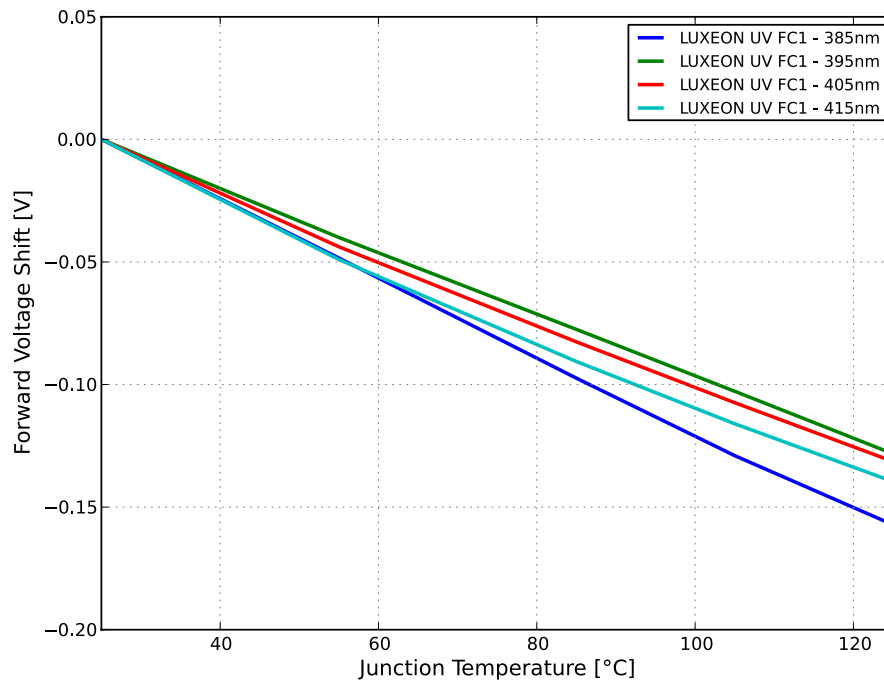


Figure 5a. Typical forward voltage shift vs. junction temperature for LUXEON UV FC1 at  $T_j = 25^\circ\text{C}$ .

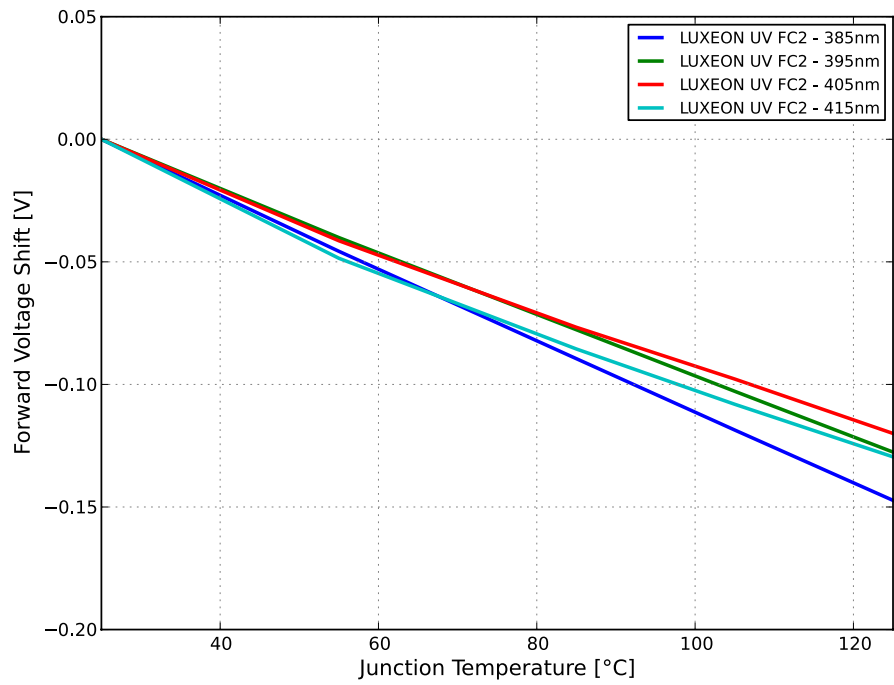


Figure 5b. Typical forward voltage shift vs. junction temperature for LUXEON UV FC2 at  $T_j=25^{\circ}\text{C}$ .

## Wavelength Shift

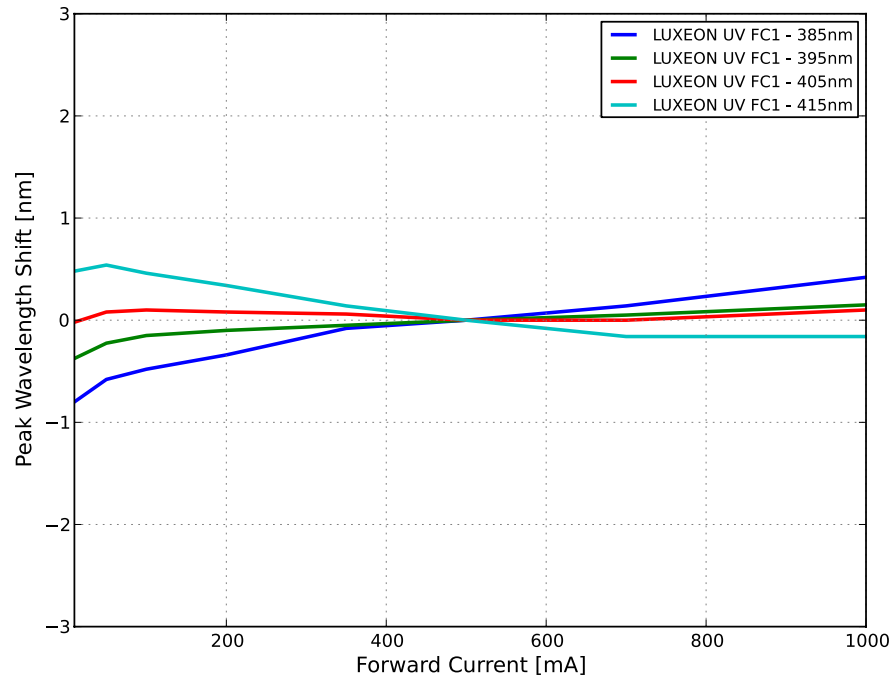


Figure 6a. Typical peak wavelength shift vs. forward current for LUXEON UV FC1 at  $T_j=25^{\circ}\text{C}$ .

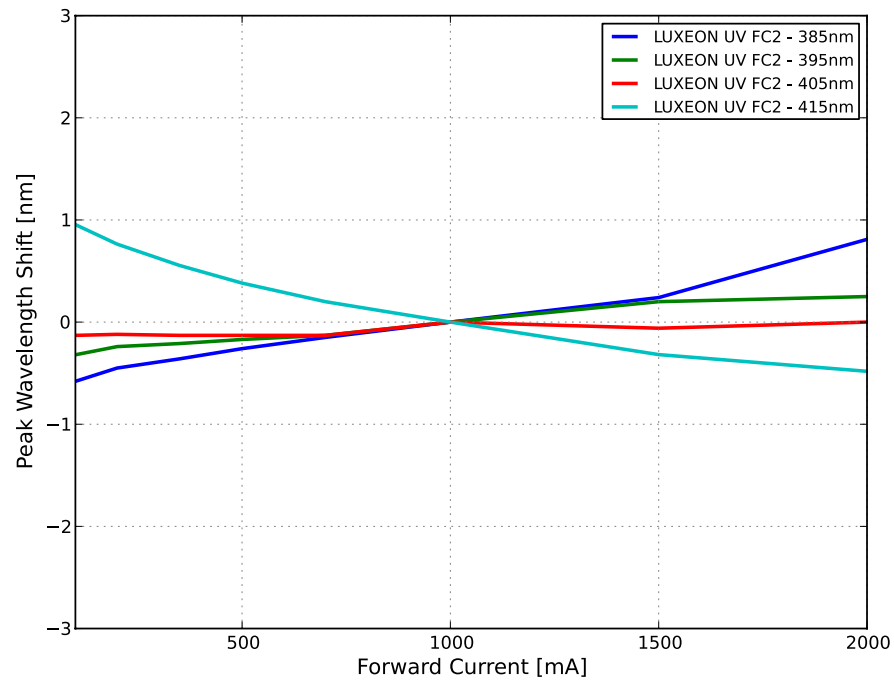


Figure 6b. Typical peak wavelength shift vs. forward current for LUXEON UV FC2 at  $T_j=25^{\circ}\text{C}$ .

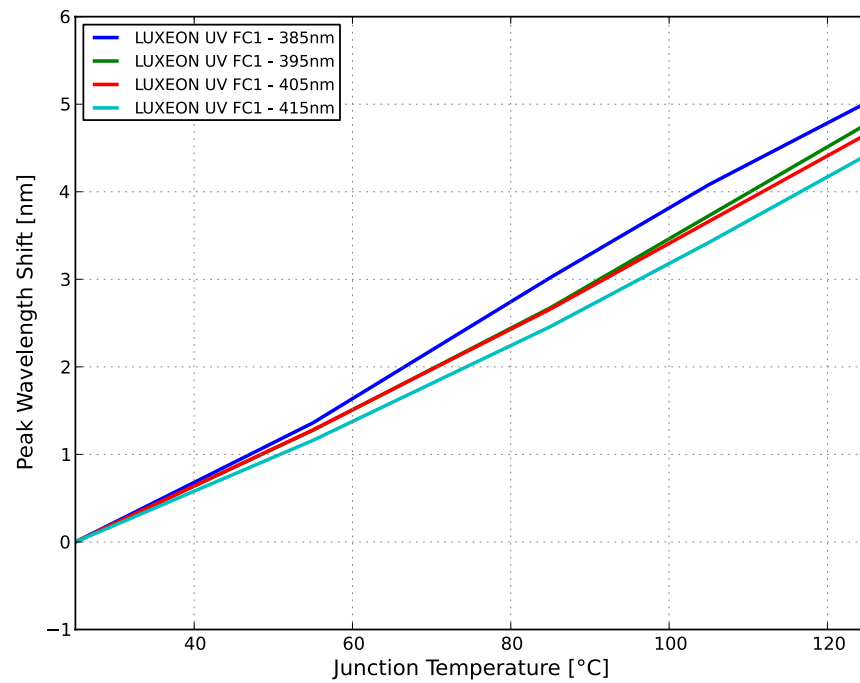


Figure 7a. Typical peak wavelength vs. junction temperature for LUXEON UV FC1 at 500mA.

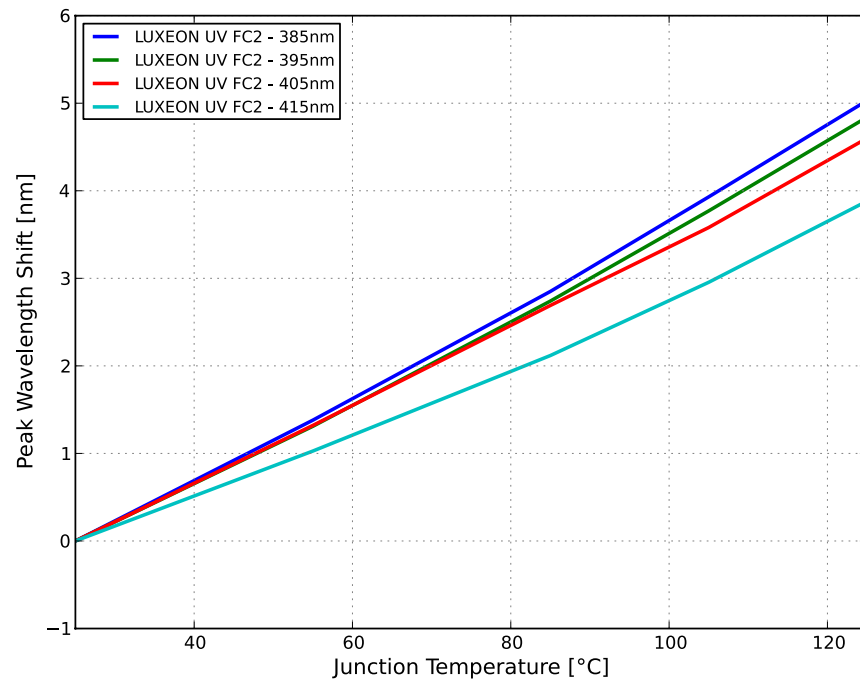


Figure 7b. Typical peak wavelength vs. junction temperature for LUXEON UV FC2 at 1000mA.

# Radiation Pattern Characteristics

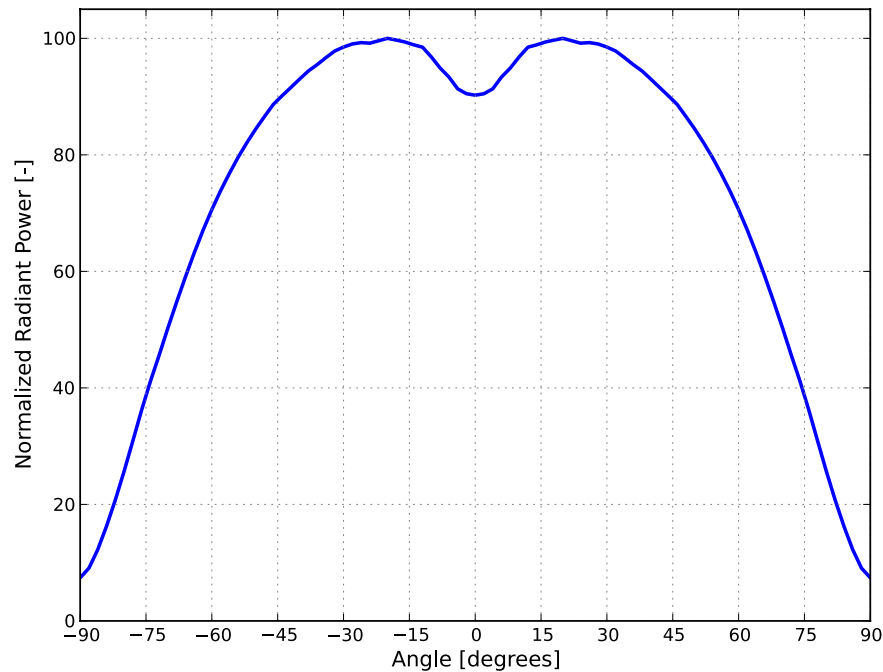


Figure 8. Typical radiation pattern for LUXEON UV FC1 at 500mA and LUXEON UV FC2 at 1000mA,  $T_j=25^{\circ}\text{C}$ .

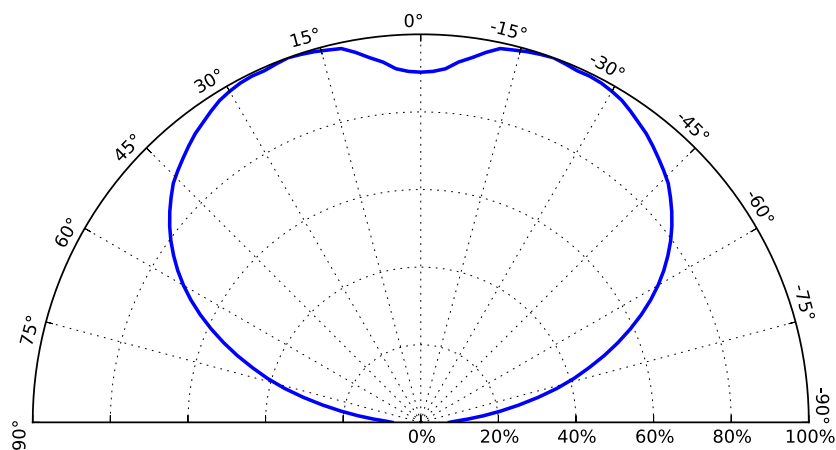


Figure 9. Typical polar radiation pattern for LUXEON UV FC1 at 500mA and LUXEON UV FC2 at 1000mA,  $T_j=25^{\circ}\text{C}$ .

# Product Bin and Labeling Definitions

## Decoding Product Bin Labeling

In the manufacturing of semiconductor products, there are variations in performance around the average values given in the technical datasheet. For this reason, Lumileds bins LED components for luminous flux or radiometric power, color point, peak or dominant wavelength and forward voltage.

LUXEON UV FC1 LEDs are labeled using a 4-digit alphanumeric CAT code following the format below:

### **A B c D**

- A** – designates radiometric power bin (example: B=300 to 350mW, D=400 to 450mW, F=500 to 550mW)
- B c** – designates peak wavelength bin (example: Ax=380 to 385nm, Cx=390 to 395nm, Ex=400 to 405nm)
- D** – designates forward voltage bin (example: 8=2.8 to 2.9V, 0=3.0 to 3.1V)

Therefore, a LUXEON UV FC1 with a radiometric power range of 400 to 450mW, peak wavelength range of 400 to 405nm and a forward voltage range of 3.0 to 3.1V has the following CAT code:

### **D E x 0**

LUXEON UV FC2 LEDs are labeled using a 5-digit alphanumeric CAT code following the format below

### **A x B c D**

- A x** – designates radiometric power bin (example: B1=600 to 800mW, D1=1000 to 1200mW, F1=1400mW to 1600mW)
- B c** – designates peak wavelength bin (example: Ax=380 to 385nm, Cx=390 to 395nm, Ex=400 to 405nm)
- D** – designates forward voltage bin (example: 8=2.8 to 2.9V, 0=3.0 to 3.1V)

Therefore, a LUXEON UV FC2 with a radiometric power range of 1000 to 1200mW, peak wavelength range of 400 to 405nm and a forward voltage range of 3.0 to 3.1V has the following CAT code:

### **D 1 E x 0**

## Radiometric Power Bins

Table 5 lists the standard radiometric power bins for LUXEON UV FC Line emitters. Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

**Table 5. Radiometric power bin definitions for LUXEON UV FC Line.**

| BIN | RADIOMETRIC POWER <sup>[1]</sup> (mW) |         |
|-----|---------------------------------------|---------|
|     | MINIMUM                               | MAXIMUM |
| B   | 300                                   | 350     |
| C   | 350                                   | 400     |
| D   | 400                                   | 450     |
| E   | 450                                   | 500     |
| F   | 500                                   | 550     |
| G   | 550                                   | 600     |
| H   | 600                                   | 650     |
| I   | 650                                   | 700     |
| J   | 700                                   | 750     |
| K   | 750                                   | 800     |
| L   | 800                                   | 850     |
| M   | 850                                   | 900     |
| A1  | 400                                   | 600     |
| B1  | 600                                   | 800     |
| C1  | 800                                   | 1000    |
| D1  | 1000                                  | 1200    |
| E1  | 1200                                  | 1400    |
| F1  | 1400                                  | 1600    |
| G1  | 1600                                  | 1800    |

Notes for Table 5:

1. Lumileds maintains a tolerance of  $\pm 10\%$  on radiometric power measurements.

## Peak Wavelength Bins

**Table 6. Peak wavelength definitions for LUXEON UV FC Line.**

| BIN | PEAK WAVELENGTH <sup>[1]</sup> (nm) |         |
|-----|-------------------------------------|---------|
|     | MINIMUM                             | MAXIMUM |
| Ax  | 380                                 | 385     |
| Bx  | 385                                 | 390     |
| Cx  | 390                                 | 395     |
| Dx  | 395                                 | 400     |
| Ex  | 400                                 | 405     |
| Fx  | 405                                 | 410     |
| Gx  | 410                                 | 415     |
| Hx  | 415                                 | 420     |

Notes for Table 6:

1. Lumileds maintains a tolerance of  $\pm 2\text{nm}$  on peak wavelength measurements.

# Forward Voltage Bins

Table 7. Forward voltage bin definitions for LUXEON UV FC Line.

| BIN | FORWARD VOLTAGE <sup>[1]</sup> (V) |         |
|-----|------------------------------------|---------|
|     | MINIMUM                            | MAXIMUM |
| 7   | 2.7                                | 2.8     |
| 8   | 2.8                                | 2.9     |
| 9   | 2.9                                | 3.0     |
| 0   | 3.0                                | 3.1     |
| 1   | 3.1                                | 3.2     |
| 2   | 3.2                                | 3.3     |
| 3   | 3.3                                | 3.4     |
| 4   | 3.4                                | 3.5     |
| T   | 2.8                                | 3.0     |
| V   | 3.0                                | 3.2     |
| W   | 3.2                                | 3.4     |
| X   | 3.4                                | 3.6     |

Notes for Table 7:

1. Lumileds maintains a tolerance of ±0.05V on forward voltage measurements.



# Mechanical Dimensions

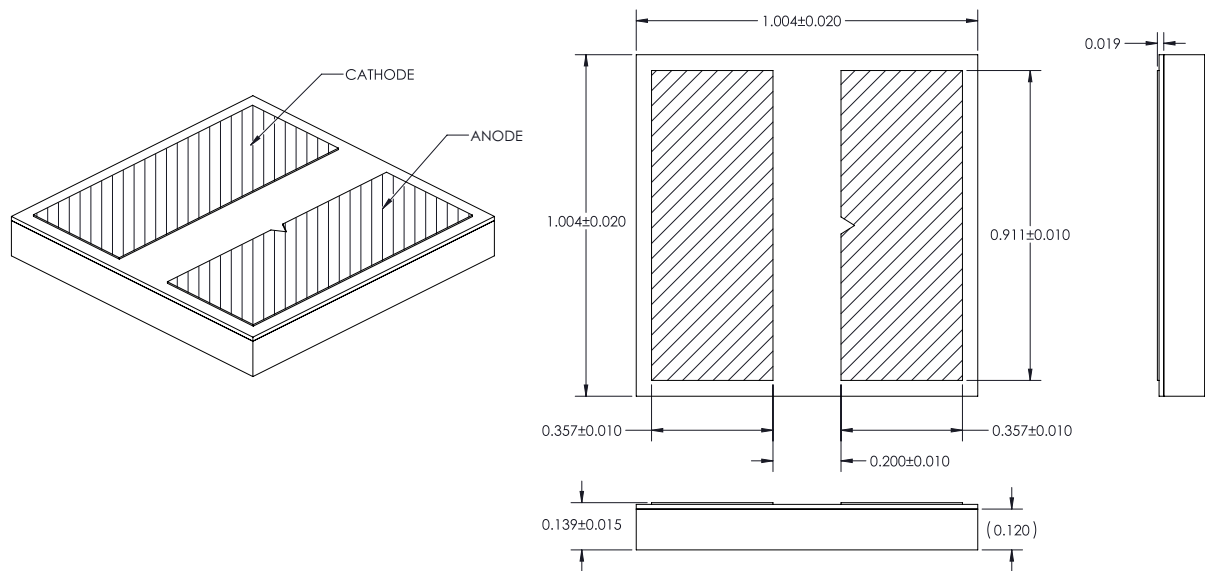


Figure 10a. Mechanical dimensions for LUXEON UV FC1.

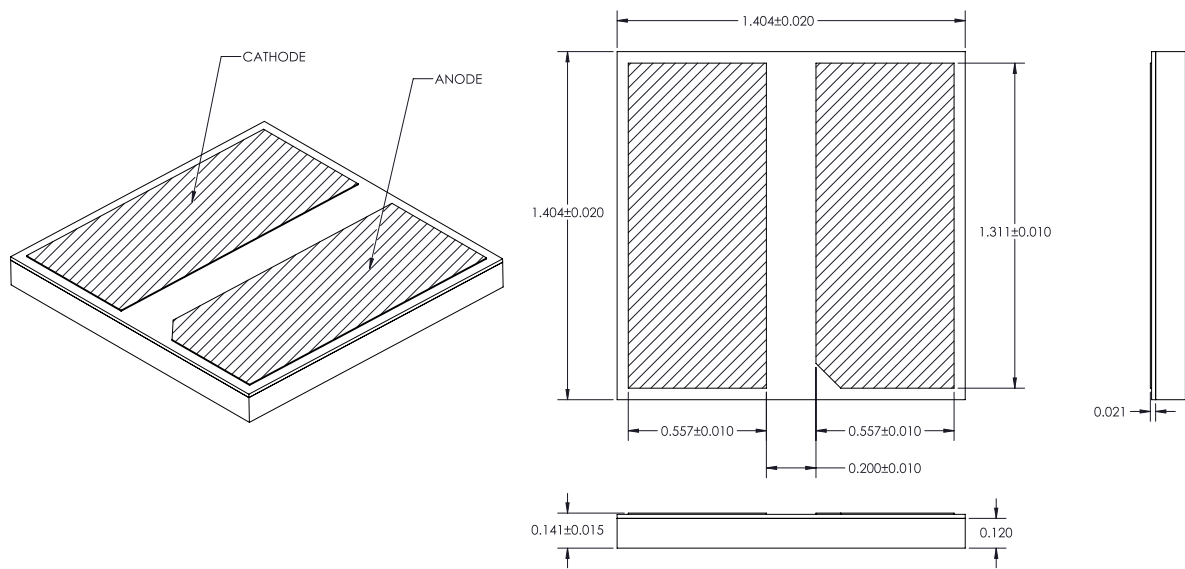


Figure 10b. Mechanical dimensions for LUXEON UV FC2.

Notes for Figures 10a and 10b:  
1. Drawings are not to scale.  
2. All dimensions are in millimeters.



## Solder Pad Design

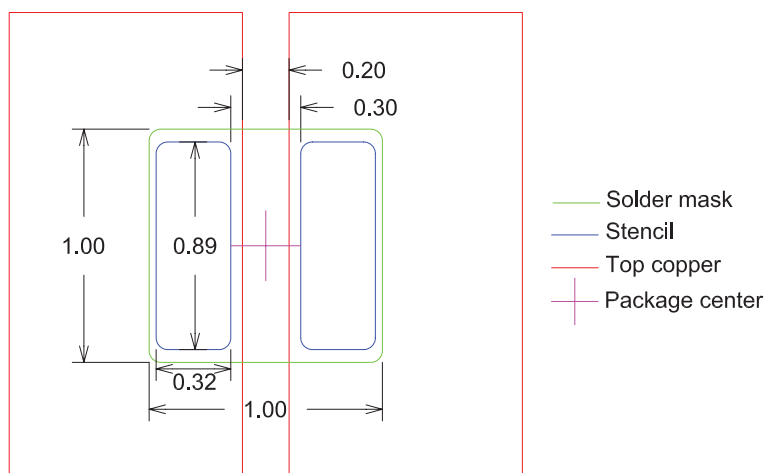


Figure 12a. Recommended PCB solder pad layout for LUXEON UV FC1.

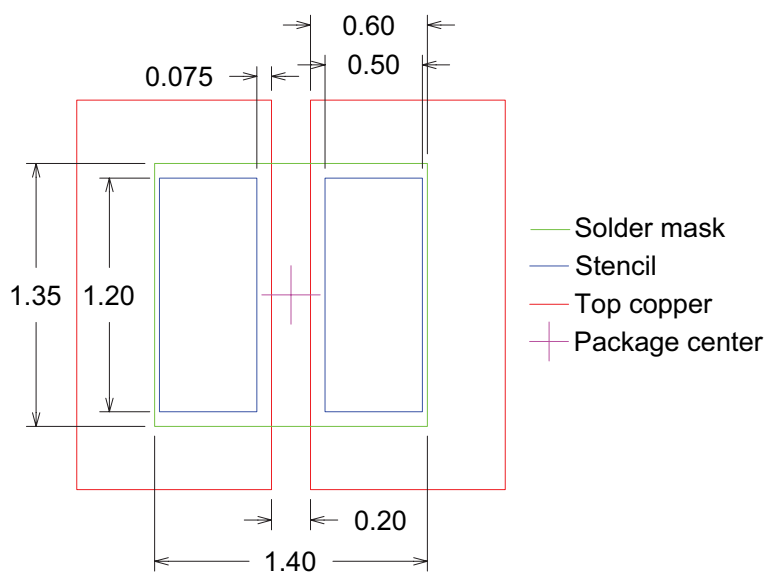


Figure 12b. Recommended PCB solder pad layout for LUXEON UV FC2.

Notes for Figures 12a and 12b:  
 1. Drawings are not to scale.  
 2. All dimensions are in millimeters.

# Packaging Information

## Pocket Tape Dimensions

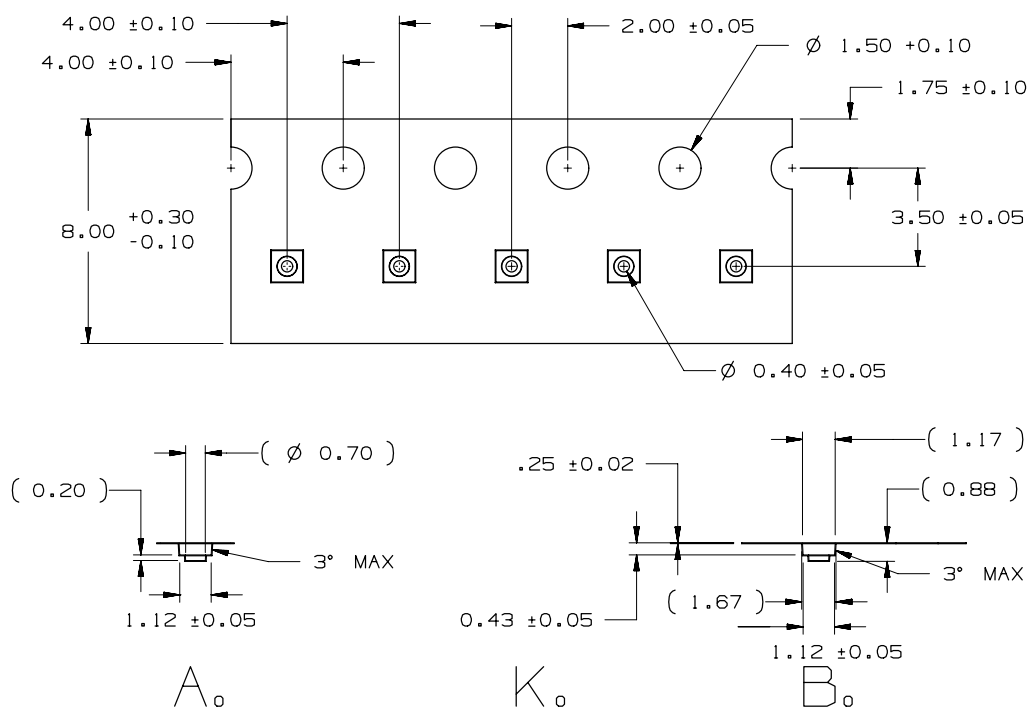


Figure 13. Pocket tape dimensions for LUXEON UV FC1.

## Reel Dimensions

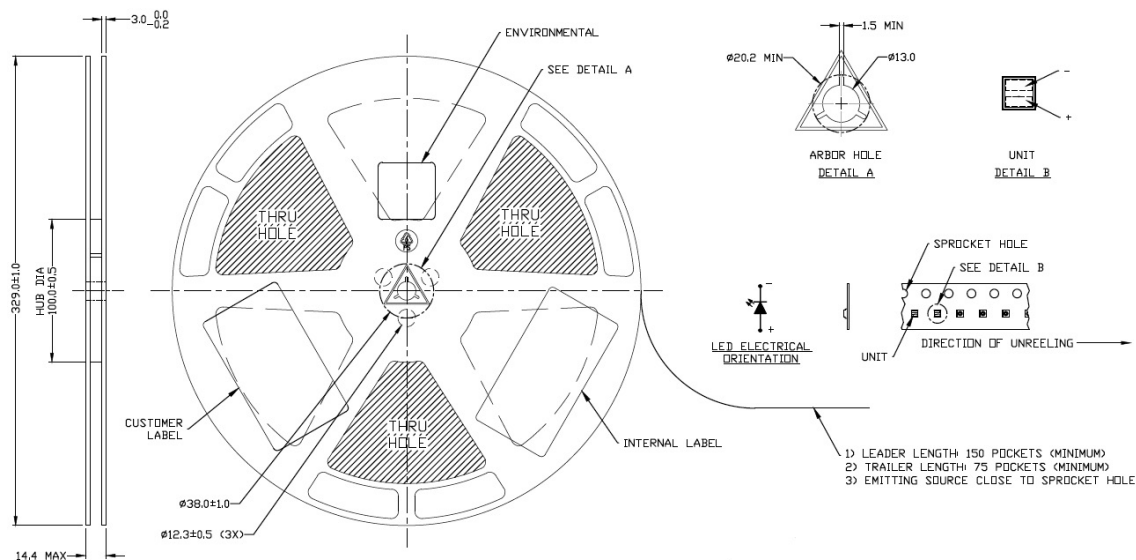


Figure 14. Reel dimensions for LUXEON UV FC1.

Notes for Figure 13 and 14:

1. Drawings are not to scale.
2. All dimensions are in millimeters.

## About Lumileds

Lumileds is the global leader in light engine technology. The company develops, manufactures and distributes groundbreaking LEDs and automotive lighting products that shatter the status quo and help customers gain and maintain a competitive edge.

With a rich history of industry “firsts,” Lumileds is uniquely positioned to deliver lighting advancements well into the future by maintaining an unwavering focus on quality, innovation and reliability.

To learn more about our portfolio of light engines, visit [lumileds.com](http://lumileds.com).



©2017 Lumileds Holding B.V. All rights reserved.  
LUXEON is a registered trademark of the Lumileds Holding B.V. in the United States and other countries.  
[lumileds.com](http://lumileds.com)

Neither Lumileds Holding B.V. nor its affiliates shall be liable for any kind of loss of data or any other damages, direct, indirect or consequential, resulting from the use of the provided information and data. Although Lumileds Holding B.V. and/or its affiliates have attempted to provide the most accurate information and data, the materials and services information and data are provided “as is,” and neither Lumileds Holding B.V. nor its affiliates warrants or guarantees the contents and correctness of the provided information and data. Lumileds Holding B.V. and its affiliates reserve the right to make changes without notice. You as user agree to this disclaimer and user agreement with the download or use of the provided materials, information and data. A listing of Lumileds product/patent coverage may be accessed at [lumileds.com/patents](http://lumileds.com/patents).