

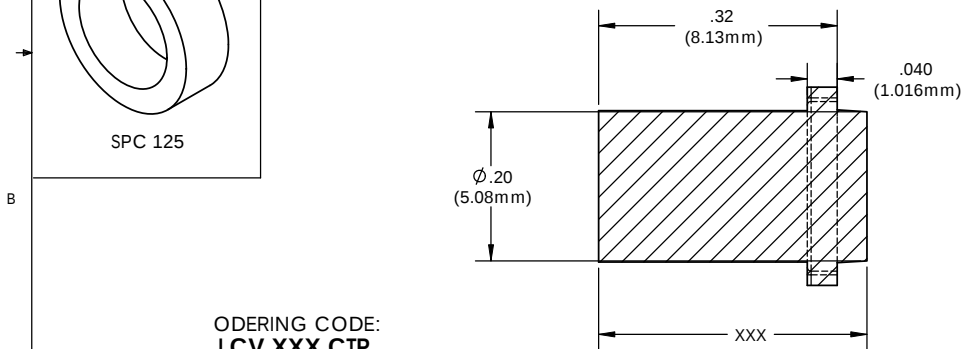
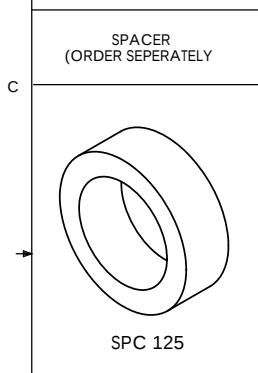
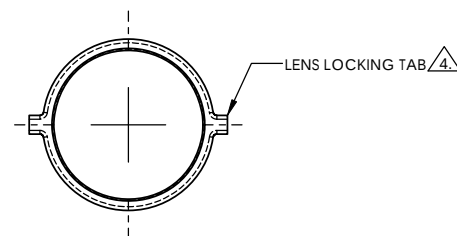


NOTES:

1. DESIGN: Lens mounts the Litepipe securely to display panel providing 180° viewing angle
2. MOUNTING: Panel mounting hole .250 (6.35mm) on 3/8" centers
3. PANEL THICKNESS: For CLB 300 and SQB 400: 1/32" to 1/4".
For Panels less than 3/16" use SPC 125
4. LENS LOCK: Insert Litepipe into lens aligning the tabs with the lens slot
5. Standoff used to adjust the height of a standard LED above the PCB and maintain a maximum .050" clearance between the Litepipe and LED.
6. Length is from front of panel to LED
7. Custom lengths available upon request (Minimum order quantity may apply)
8. U.S. & Foreign Pat. Issued and Pend.


REVISIONS				
ECN #	REV	DESCRIPTION	DATE	INITIALS
	N/A	INITIAL RELEASE	1/25/96	JS
	001	REVISED PER ECN111009AZ01	4/23/10	KH

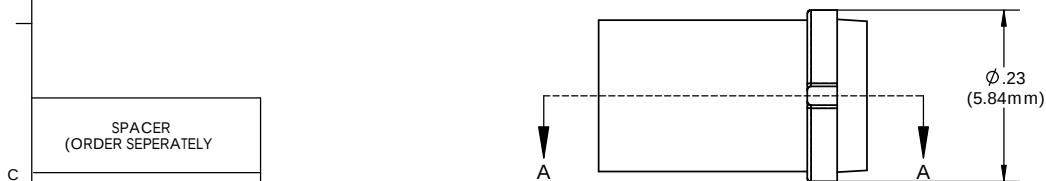


ORDERING CODE:
LCV XXX CTP

LENGTH CODE		COLOR	
036	= .360"	CTP	CLEAR
056	.560"		
076	.760"		
096	.960"		
116	1.160"		
136	1.360"		

CUSTOM LENGTHS AVAILABLE UPON REQUEST (SEE NOTE 7)



SECTION A-A



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		MATERIAL ACRYLIC (OPTICAL GRADE) U.L. 94-HB		VISUAL COMMUNICATIONS COMPANY, INC. 190 Bosstick Boulevard, Suite 101 San Marcos, CA 92069 USA Phone (760) 560-1300 Fax (760) 560-1301 email vccsales@vccite.com	
ANGLES ±1°	DECIMALS .X ±.020 .XX ±.010 .XXX ±.005	FINISH SEE NOTES		TITLE: 5MM ROUND LITEPIPE	
THIRD ANGLE PROJECTION		APPROVAL	DATE	SIZE	DWG. NO.
DRAWN		K.Howard	4/23/10	B	LCV XXX CTP
CHECKED		DPZ	5/4/10	SCALE: 6:1	REV 001
DO NOT SCALE DRAWING		SHEET 1 OF 1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[LCV036CTP](#) [LCV096CTP](#) [LCV076CTP](#) [LCV056CTP](#) [LCV136CTP](#) [LCV116CTP](#)