


UNCONTROLLED DOCUMENT


PIN 1 -

PIN 5

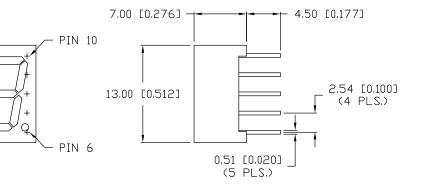

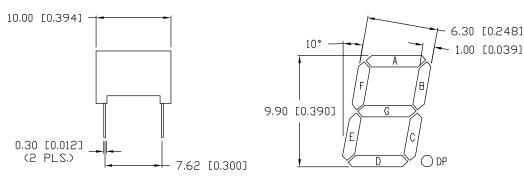





PART NUMBER LDS-A3906RI

E.C.N. NUMBER AND REVISION COMMENTS DATE 3.23.03 E.C.N. #10BRDR. & REDRAWN IN 3D.

REV.

ELECTRO-OPTICAL CH	HARACTERIS	STICS TA=25	5 ' C	$I_{f}=10mA$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		660		nm	
FORWARD VOLTAGE		1.7	2.2	٧f	
REVERSE VOLTAGE	4.0			V_r	1r=100,uA
AXIAL INTENSITY		6000		μcd	$I_f = 10 \text{mA}$
EMITTED COLOR:	RED				
FACE COLOR:	GRAY				
SEGMENT COLOR:	MII KY W	HITE DIFFUS	GED.		

LIMITS OF SAFE OPERATION AT 25°C PER DIE

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.2	mW/'C
OPERATING, STORAGE TEMP.	-40 TO +85	°C
SOLDERING TEMP.	+ 260	° C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.005).

REV.

PART NUMBER LDS-A3906RI

0.39" SEVEN SEGMENT, LED DISPLAY, COMMON ANODE. 660nm RED CHIPS, GRAY FACE WITH WHITE SEGMENTS. CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

APPROVED BY: DATE: DRAWN BY: CHECKED BY:

8.9.99 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

LDS-A3906RI