
UNCONTROLLED DOCUMENT


PART NUMBER REV.

LDS-A5152RI

REV. E.C.N. NUMBER AND REVISION COMMENTS DATE

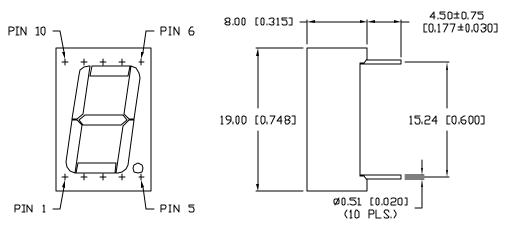


ELECTRO-OPTICAL	CHARACTE	RISTICS	ΤΑ=25℃	I _f =1D	mΑ	
PARAMETER		MIN	ΤΥP	MAX	UNITS	TEST COND
PEAK WAVELENGTH			700 (RED)		nm	_
		5	65 (GREEN))	nm	
FORWARD VOLTAGE	(R/G)		2.0/2.2	2.5/2.6	۷f	
REVERSE VOLTAGE		5.0			٧ _r	Ir=100μΑ
axial intensity	(R/G)		800/3900		µcd	$I_f = 10 \text{mA}$
EMITTED COLOR:	RED/0	REEN				
FACE COLOR:	GRAY					
SEGMENT COLOR:	MILKY	WHITE	DIFFUSED			

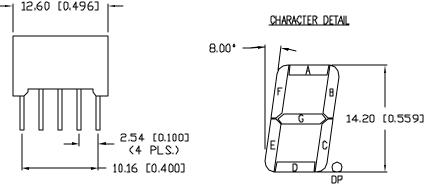

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PEAK FORWARD CURRENT* 150	mA
STEADY CURRENT (R/G) 30/25	mA
POWER DISSIPATION 105	тW
DERATE FROM 25°C -1.2	mW∕°C
OPERATING, STORAGE TEMP. – 40 TO +85	•Ċ
SOLDERING TEMP. + 26D	•c
2.0mm FROM BODY	3 SEC. MAX

RED GREEN

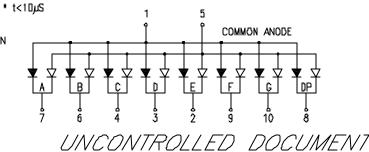

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±0.25mm (±0.010")

REV.

PART NUMBER
LDS—A5152RI

0.56" SEVEN SEGMENT, SINGLE DIGIT DISPLAY, RED/GREEN CHIPS, GRAY FACE WITH WHITE SEGMENTS, COMMON ANODE, RIGHT DECIMAL.

CONFIDENTIAL NFORMATION

THE NFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISSIBLE AND DISSEMINATION TO ALL THRO PARTIES.

<u>reliability note</u>

OUR MANY YEARS OF EXPERIENCE DATA ACCUMILLATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
PHONE: 1-847-359-2790
WEB: HTTP://WWW.LUMEX.COM

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 5-11-99
PAGE: 1 OF 1
BC SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: LDS-A5152RI