



REMINDERS

- Product information in this catalog is as of October 2008. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

Please note that Taiyo Yuden Co., Ltd. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact Taiyo Yuden Co., Ltd. for further details of product specifications as the individual specification is available.

- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.

- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,(automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact Taiyo Yuden Co., Ltd. for more detail in advance.

Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.

In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN's official sales channel").

It is only applicable to the products purchased from any of TAIYO YUDEN's official sales channel.

- Please note that Taiyo Yuden Co., Ltd. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. Taiyo Yuden Co., Ltd. grants no license for such rights.

- Caution for export

Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations," and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.

Should you have any question or inquiry on this matter, please contact our sales staff.

大容量積層セラミックコンデンサ

HIGH VALUE MULTILAYER CERAMIC CAPACITORS

	Code	Temp.characteristics	Operating temp. range
OPERATING TEMP.	BJ	B	-25~+85°C
		X5R*	-55~+85°C
	B7	X7R	-55~+125°C
	F	F	-25~+85°C
		Y5V	-30~+85°C

*個別仕様の取扱いにより、X7R 仕様に対応している場合があります。

*We may provide X7R for some items according to the individual specification.



フロー/WAVE

リフロー/REFLOW

特長 FEATURES

- 電極にNi金属を使用し、端子電極部にメッキをしてあることにより、はんだ付け性および耐熱性にすぐれ、マイグレーションもほとんど発生せず、高い信頼性を示します
- 等価直列抵抗 (ESR) が小さく、ノイズ吸収性にすぐれています。
- 特にタンタルおよびアルミ電解コンデンサに比較した場合：
 - 高い許容リップル電流値
 - 高い定格電圧でありながら小型形状
 - 絶縁抵抗、破壊電圧が高く信頼性にすぐれている
 - 等の特徴があります

- The use of Nickel(Ni) as material for both the internal and external electrodes improves the solderability and heat resistance characteristics. This almost completely eliminates migration and raises the level of reliability significantly.
- Low equivalent series resistance(ESR) provides excellent noise absorption characteristics.
- Compared to tantalum or aluminum electrolytic capacitors these ceramic capacitors offer a number of excellent features, including:
 - Higher permissible ripple current values
 - Smaller case sizes relative to rated voltage
 - Improved reliability due to higher insulation resistance and breakdown voltage.

用途 APPLICATIONS

- デジタル回路全般
- 電源バイパスコンデンサ
 - 液晶モジュール用
 - 液晶駆動電圧ライン用
 - 電源電圧の高いLSI、IC、OPアンプ用
- 平滑コンデンサ
 - DC-DCコンバータ (入力、出力側用)
 - スイッチング電源 (2次側用)

- General digital circuit
- Power supply bypass capacitors
 - Liquid crystal modules
 - Liquid crystal drive voltage lines
 - LSI, IC, converters(both for input and output)
- Smoothing capacitors
 - DC-DC converters (both for input and output)
 - Switching power supplies (secondary side)

形名表記法 ORDERING CODE

1

定格電圧 [VDC]

A	4
J	6.3
L	10
E	16
T	25
G	35
U	50

2

シリーズ名

M	積層コンデンサ
---	---------

3

端子電極

K	メッキ品
---	------

4

形状寸法[EIA] L×W(mm)

107 (0603)	1.6×0.8
212 (0805)	2.0×1.25
316 (1206)	3.2×1.6
325 (1210)	3.2×2.5

5

温度特性

BJ	B
	X5R
B7	X7R
	F
△F	Y5V

△=スペース

6

公称静電容量 [pF]

例	
473	47,000
105	1,000,000

7

容量許容差

K	±10%
M	±20%
Z	+80% -20%

8

製品厚み [mm]

K	0.45
A	0.8
D	0.85
F	1.15
G	1.25
H	1.5
L	1.6
N	1.9
Y	2.0max
M	2.5

9

個別仕様

-	標準
---	----

10

包装

T	φ178mm テーピング (4mmピッチ) 全形状
P	φ178mm テーピング (4mmピッチ,1000個/リール) 325形状 厚み:M

11

当社管理記号

△	標準品
---	-----

△=スペース

J

M

K

3

1

6

B

J

1

0

6

M

L

-

T

△

1

2

3

4

5

6

7

8

9

10

11

1	2	3	4	5	6	7	8	9	10	11
Rated voltage [VDC]	Series name	End termination	Dimensions [case size] (mm)	Temperature characteristics code	Nominal capacitance [pF]	Capacitance tolerance	Thickness (mm)	Special code	Packaging	Internal code
A 4 J 6.3 L 10 E 16 T 25 G 35 U 50	M Multilayer ceramic capacitors	K Plated	107 (0603) 1.6×0.8 212 (0805) 2.0×1.25 316 (1206) 3.2×1.6 325 (1210) 3.2×2.5	BJ B X5R B7 X7R △F F Y5V	example 473 47,000 105 1,000,000	K ±10% M ±20% Z +80% -20%	K 0.45 A 0.8 D 0.85 F 1.15 G 1.25 H 1.5 L 1.6 N 1.9 Y 2.0max M 2.5	- Standard products	T φ178mm Taping (4mm pitch) All types P φ178mm Taping (4mm pitch,1000pcs/reel) 1210Type Thickness:M	△ Standard products △=Blank space

CAPACITORS



45

汎用・低背積層セラミックコンデンサ General・Low profile Multilayer Ceramic Capacitors

アイテム一覧 PART NUMBERS

107TYPE

【温度特性 Temp.char. BJ:B/X5R】

定格電圧 Rated Voltage	形 名 Ordering code	EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance 〔μF〕	温度特性 Temperature characteristics	tan δ Dissipation factor 〔%〕Max.	実装条件 Soldering method R:リフロー Reflow soldering W: フロー Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness 〔mm〕
35V	GMK107 BJ105□A ^{*1}	RoHS	1	B/X5R	5	R		0.8±0.1
	TMK107 BJ105□K ^{*1}	RoHS	1	X5R	10	R		0.45±0.05
25V	TMK107 BJ224□A	RoHS	0.22	B/X5R	3.5	R/W		0.8±0.1
	TMK107 BJ474□A ^{*1}	RoHS	0.47	B/X5R	3.5	R		0.8±0.1
	TMK107 BJ105□A ^{*1}	RoHS	1	B/X5R	5	R		0.8±0.1
	EMK107 BJ105□K ^{*1}	RoHS	1	X5R	10	R		0.45±0.05
16V	EMK107 BJ224□A	RoHS	0.22	B/X5R ^{*2}	3.5	R/W		0.8±0.1
	EMK107 BJ474□A	RoHS	0.47	B/X5R	3.5			0.8±0.1
	EMK107 BJ105□A ^{*1}	RoHS	1	B/X5R	5			0.8±0.1
	EMK107 BJ225□A ^{*1}	RoHS	2.2	B/X5R	10	R	±10%	0.8±0.1
	LMK107 BJ105□K ^{*1}	RoHS	1	B/X5R	10		±20%	0.45±0.05
	LMK107 BJ225□K ^{*1}	RoHS	2.2	X5R	10			0.45±0.05
10V	LMK107 BJ224□A	RoHS	0.22	B/X5R ^{*2}	3.5	R/W		0.8±0.1
	LMK107 BJ474□A	RoHS	0.47	B/X5R ^{*2}	3.5			0.8±0.1
	LMK107 BJ105□A ^{*1}	RoHS	1	B/X5R ^{*2}	5			0.8±0.1
	LMK107 BJ225□A ^{*1}	RoHS	2.2	B/X5R	10			0.8±0.1
	LMK107 BJ475□A ^{*1}	RoHS	4.7	X5R	10			0.8±0.1
	JMK107 BJ474□K	RoHS	0.47	B/X5R	5			0.45±0.05
6.3V	JMK107 BJ105□K ^{*1}	RoHS	1	B/X5R	10			0.45±0.05
	JMK107 BJ225□K ^{*1}	RoHS	2.2	X5R	10			0.45±0.05
	JMK107 BJ475MK ^{*1,*3}	RoHS	4.7	X5R	10	R	±20%	0.45±0.05
	JMK107 BJ225□A ^{*1}	RoHS	2.2	B/X5R	10		±10%	0.8±0.1
	JMK107 BJ475□A ^{*1}	RoHS	4.7	X5R	10		±20%	0.8±0.1
	JMK107 BJ106MA ^{*1,*3}	RoHS	10	X5R	10		±20%	0.8±0.1
	AMK107 BJ225□K ^{*1}	RoHS	2.2	X5R	10		±10%	0.45±0.05
4V	AMK107 BJ475MK ^{*1}	RoHS	4.7	X5R	10		±20%	0.45±0.05
	AMK107 BJ106MA ^{*1}	RoHS	10	X5R	10			0.8±0.1
	AMK107 BJ226MA ^{*1,*3}	RoHS	22	X5R	10			0.8±0.2

形名の□には静電容量許容差記号が入ります。

*1 高温負荷試験の試験電圧は定格電圧の 1.5 倍

*2 個別仕様の取扱いにより、X7R仕様に該当している場合があります。

*3 ご使用の回路や機器により、個別仕様の取り交わしが必要になります。
必ず正規販売チャンネルにお問い合わせください。

□ Please specify the capacitance tolerance code.

*1 Test Voltage of Loading at high temperature test is 1.5 time of the rated voltage.

*2 We may provide X7R for some items according to the individual specification.

*3 The exchange of individual specification is necessary depending on the application and circuit condition. Please contact Taiyo Yuden sales channel.

【温度特性 Temp.char. B7:X7R】

定格電圧 Rated Voltage	形 名 Ordering code	EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance 〔μF〕	温度特性 Temperature characteristics	tan δ Dissipation factor 〔%〕Max.	実装条件 Soldering method R:リフロー Reflow soldering W: フロー Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness 〔mm〕
16V	EMK107 B7 224□A ^{*1}	RoHS	0.22	X7R	3.5	R/W		0.8±0.1
	EMK107 B7 105□A ^{*1}	RoHS	1	X7R	5	R		0.8±0.1
	LMK107 B7 224□A	RoHS	0.22	X7R	3.5	R/W		0.8±0.1
10V	LMK107 B7 474□A	RoHS	0.47	X7R	3.5		±10%	0.8±0.1
	LMK107 B7 105□A ^{*1}	RoHS	1	X7R	5	R	±20%	0.8±0.1
6.3V	JMK107 B7 224□A	RoHS	0.22	X7R	3.5	R/W		0.8±0.1
	JMK107 B7 474□A	RoHS	0.47	X7R	3.5			0.8±0.1
	JMK107 B7 105□A ^{*1}	RoHS	1	X7R	5	R		0.8±0.1

形名の□には静電容量許容差記号が入ります。

*1 高温負荷試験の試験電圧は定格電圧の 1.5 倍

□ Please specify the capacitance tolerance code.

*1 Test Voltage of Loading at high temperature test is 1.5 time of the rated voltage.

【温度特性 Temp.char. F:F/Y5V】

定格電圧 Rated Voltage	形 名 Ordering code		EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance 〔μF〕	温度特性 Temperature characteristics	tan δ Dissipation factor 〔%〕Max.	実装条件 Soldering method R: リフロー Reflow soldering W: フロー Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness 〔mm〕
50V	UMK107 F104ZA		RoHS	0.1	F/Y5V	7	R/W	+80% -20%	0.8±0.1
25V	TMK107 F474ZA		RoHS	0.47	F/Y5V	7			0.8±0.1
	EMK107 F224ZA		RoHS	0.22	F/Y5V	7			0.8±0.1
16V	EMK107 F474ZA		RoHS	0.47	F/Y5V	7	R		0.8±0.1
	EMK107 F105ZA		RoHS	1	F/Y5V	16			0.8±0.1
	EMK107 F225ZA		RoHS	2.2	F/Y5V	16			0.8±0.1
10V	LMK107 F105ZA		RoHS	1	F/Y5V	16			0.8±0.1
	LMK107 F225ZA		RoHS	2.2	F/Y5V	16			0.8±0.1

■ 212TYPE

【温度特性 Temp.char. BJ:B/X5R】

定格電圧 Rated Voltage	形 名 Ordering code		EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance 〔μF〕	温度特性 Temperature characteristics	tan δ Dissipation factor 〔%〕Max.	実装条件 Soldering method R:リフロー Reflow soldering W: フロー Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness 〔mm〕	
50V	UMK212 BJ104□G		RoHS	0.1	B/X5R* ²	3.5	R/W		1.25±0.1	
	UMK212 BJ224□G* ¹		RoHS	0.22	B/X5R* ²	3.5			1.25±0.1	
	UMK212 BJ474□G* ¹		RoHS	0.47	B/X5R	3.5			1.25±0.1	
	UMK212 BJ105□G* ¹		RoHS	1	X5R	5			1.25±0.1	
35V	GMK212 BJ474□G		RoHS	0.47	B/X5R	3.5			1.25±0.1	
	GMK212 BJ105□G* ¹		RoHS	1	B/X5R* ²	3.5			1.25±0.1	
25V	TMK212 BJ474□D		RoHS	0.47	B/X5R	3.5	R		0.85±0.1	
	TMK212 BJ105□D		RoHS	1	B/X5R	5			0.85±0.1	
	TMK212 BJ105□G		RoHS	1	B/X5R	5			1.25±0.1	
	TMK212 BJ225□G* ¹		RoHS	2.2	B/X5R	5			1.25±0.1	
	TMK212 BJ475□G* ¹		RoHS	4.7	X5R	10			1.25±0.15	
16V	EMK212 BJ105□D		RoHS	1	B/X5R	5	R	±10% ±20%	0.85±0.1	
	EMK212 BJ225□D		RoHS	2.2	B/X5R	5			0.85±0.1	
	EMK212 BJ475□D* ^{1,*3}		RoHS	4.7	B/X5R	10	R/W		0.85±0.1	
	EMK212 BJ105□G		RoHS	1	B/X5R* ²	3.5			1.25±0.1	
	EMK212 BJ225□G		RoHS	2.2	B/X5R* ²	5	R		1.25±0.1	
	EMK212 BJ475□G* ¹		RoHS	4.7	B/X5R	5			1.25±0.15	
	EMK212 BJ106□G* ^{1,*3}		RoHS	10	X5R	10			1.25±0.15	
	LMK212 BJ475□K* ¹		RoHS	4.7	X5R	10			0.45±0.05	
	LMK212 BJ105□D		RoHS	1	B/X5R* ²	3.5			0.85±0.1	
	LMK212 BJ225□D		RoHS	2.2	B/X5R	5			0.85±0.1	
10V	LMK212 BJ475□D		RoHS	4.7	B/X5R	10			0.85±0.1	
	LMK212 BJ106□D* ¹		RoHS	10	X5R	10			0.85±0.1	
	LMK212 BJ105□G		RoHS	1	B/X5R* ²	3.5	R/W		1.25±0.1	
	LMK212 BJ225□G		RoHS	2.2	B/X5R* ²	5			1.25±0.1	
	LMK212 BJ475□G		RoHS	4.7	B/X5R	5	R		1.25±0.15	
	LMK212 BJ106□G		RoHS	10	X5R	10			1.25±0.15	
	LMK212 BJ226MG* ^{1,*3}		RoHS	22	X5R	10			±20%	1.25±0.2
	6.3V	JMK212 BJ475□K* ¹		RoHS	4.7	X5R			10	R
JMK212 BJ106MK* ^{1,*3}			RoHS	10	X5R	10	±20%	0.45±0.05		
JMK212 BJ475□D			RoHS	4.7	X5R	10	±10% ±20%	0.85±0.1		
JMK212 BJ106□D			RoHS	10	X5R	10	±20%	0.85±0.1		
JMK212 BJ226MD* ^{1,*3}			RoHS	22	X5R	10		0.85±0.1		
JMK212 BJ475□G			RoHS	4.7	B/X5R	5	±10% ±20%	1.25±0.15		
JMK212 BJ106□G			RoHS	10	X5R	10		1.25±0.15		
JMK212 BJ226MG* ^{1,*3}			RoHS	22	X5R	10	±20%	1.25±0.15		
JMK212 BJ476MG* ^{1,*3}		RoHS	47	X5R	10	1.25±0.2				
4V	AMK212 BJ226MD* ¹		RoHS	22	X5R	10			0.85±0.1	

形名の□には静電容量許容差記号が入ります。

*1 高温負荷試験の試験電圧は定格電圧の 1.5 倍

*2 個別仕様の取扱いにより、X7R仕様に対応している場合があります。

*3 ご使用の回路や機器により、個別仕様の取り交わしが必要になります。
必ず正規販売チャンネルにお問い合わせください。

□ Please specify the capacitance tolerance code.

*1 Test Voltage of Loading at high temperature test is 1.5 time of the rated voltage.

*2 We may provide X7R for some items according to the individual specification.

*3 The exchange of individual specification is necessary depending on the application and circuit condition. Please contact Taiyo Yuden sales channel.

【温度特性 Temp.char. B7:X7R】

定格電圧 Rated Voltage	形 名 Ordering code		EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance 〔μF〕	温度特性 Temperature characteristics	tan δ Dissipation factor 〔%〕Max.	実装条件 Soldering method R: リフロー Reflow soldering W: フロ Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness 〔mm〕
50V	UMK212 B7 104□G		RoHS	0.1	X7R	3.5	R/W	±10% ±20%	1.25±0.1
	UMK212 B7 224□G* ¹		RoHS	0.22	X7R	3.5			1.25±0.1
	UMK212 B7 474□G* ¹		RoHS	0.47	X7R	3.5			1.25±0.1
35V	GMK212 B7 105□G* ¹		RoHS	1	X7R	3.5			1.25±0.1
25V	TMK212 B7 105□G* ¹		RoHS	1	X7R	5	R		1.25±0.1
16V	EMK212 B7 474□D		RoHS	0.47	X7R	3.5	R/W		0.85±0.1
	EMK212 B7 105□D		RoHS	1	X7R	5	R		0.85±0.1
	EMK212 B7 105□G		RoHS	1	X7R	3.5	R/W		1.25±0.1
	EMK212 B7 225□G* ¹		RoHS	2.2	X7R	10	R		1.25±0.1
10V	LMK212 B7 105□D		RoHS	1	X7R	3.5			0.85±0.1
	LMK212 B7 105□G		RoHS	1	X7R	3.5	R/W		1.25±0.1
	LMK212 B7 225□G		RoHS	2.2	X7R	5	R		1.25±0.1
	LMK212 B7 475□G* ¹		RoHS	4.7	X7R	10	R/W		1.25±0.15

形名の□には静電容量許容差記号が入ります。

*¹ 高温負荷試験の試験電圧は定格電圧の 1.5 倍

□ Please specify the capacitance tolerance code.

*¹ Test Voltage of Loading at high temperature test is 1.5 time of the rated voltage.

【温度特性 Temp.char. F:F/Y5V】

定格電圧 Rated Voltage	形 名 Ordering code		EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance 〔μF〕	温度特性 Temperature characteristics	tanδ Dissipation factor 〔%〕Max.	実装条件 Soldering method R:リフロー Reflow soldering W: フロー Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness 〔mm〕
50V	UMK212 F224ZD		RoHS	0.22	F/Y5V	7	R/W	+80% -20%	0.85±0.1
	UMK212 F474ZG		RoHS	0.47	F/Y5V	7			1.25±0.1
	UMK212 F105ZG		RoHS	1	F/Y5V	7			1.25±0.1
16V	EMK212 F225ZG		RoHS	2.2	F/Y5V	7	R		1.25±0.1
10V	LMK212 F225ZD		RoHS	2.2	F/Y5V	9			0.85±0.1
	LMK212 F475ZG		RoHS	4.7	F/Y5V	9			1.25±0.1
	LMK212 F106ZG		RoHS	10	F/Y5V	16			1.25±0.1
6.3V	JMK212 F475ZD		RoHS	4.7	F/Y5V	16			0.85±0.1
	JMK212 F106ZG		RoHS	10	F/Y5V	16			1.25±0.1

■ 316TYPE

【温度特性 Temp.char. BJ:B/X5R】

定格電圧 Rated Voltage	形 名 Ordering code		EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance 〔μF〕	温度特性 Temperature characteristics	tanδ Dissipation factor 〔%〕Max.	実装条件 Soldering method R:リフロー Reflow soldering W: フロー Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness 〔mm〕		
50V	UMK316 BJ224□L		RoHS	0.22	B/X5R* ²	2.5	R/W	±10% ±20%	1.6±0.2		
	UMK316 BJ474□L		RoHS	0.47	B/X5R* ²	3.5			1.6±0.2		
	UMK316 BJ105□L		RoHS	1	B/X5R* ²	3.5			1.6±0.2		
	UMK316 BJ475□L* ¹		RoHS	4.7	X5R	10			1.6±0.2		
25V	TMK316 BJ105□D		RoHS	1	B/X5R	3.5	R			0.85±0.1	
	TMK316 BJ225□D* ¹		RoHS	2.2	B/X5R	3.5				0.85±0.1	
	TMK316 BJ475□D* ¹		RoHS	4.7	X5R	5				0.85±0.1	
	TMK316 BJ225□L		RoHS	2.2	B/X5R* ²	3.5				1.6±0.2	
	TMK316 BJ475□L* ¹		RoHS	4.7	B/X5R	5				1.6±0.2	
	TMK316 BJ106□L* ¹		RoHS	10	X5R	5				1.6±0.2	
16V	EMK316 BJ225□D		RoHS	2.2	B/X5R	3.5	R			0.85±0.1	
	EMK316 BJ475□D		RoHS	4.7	X5R	5				0.85±0.1	
	EMK316 BJ106□D* ¹		RoHS	10	X5R	10				0.85±0.1	
	EMK316 BJ105□F		RoHS	1	B/X5R* ²	3.5			R/W	1.15±0.1	
	EMK316 BJ106□F* ¹		RoHS	10	X5R	10			R	1.15±0.1	
	EMK316 BJ225□L		RoHS	2.2	B/X5R* ²	3.5			R/W	1.6±0.2	
	EMK316 BJ475□L		RoHS	4.7	B/X5R	5			R	1.6±0.2	
	EMK316 BJ106□L* ¹		RoHS	10	B/X5R	5				1.6±0.2	
	EMK316 BJ226ML* ¹		RoHS	22	B/X5R	10				±20%	1.6±0.2
	LMK316 BJ475□D		RoHS	4.7	B/X5R	5				±10%	0.85±0.1
10V	LMK316 BJ106□D		RoHS	10	B/X5R	10	R		±20%	0.85±0.1	
	LMK316 BJ226MD* ^{1,⋆3}		RoHS	22	X5R	10			±20%	0.85±0.1	
	LMK316 BJ106□L		RoHS	10	B/X5R	5			±10% ±20%	1.6±0.2	
	LMK316 BJ226ML* ¹		RoHS	22	B/X5R	10			±20%	1.6±0.2	
	LMK316 BJ476ML* ^{1,⋆3}		RoHS	47	X5R	10			±20%	1.6±0.2	
6.3V	JMK316 BJ106□D		RoHS	10	B/X5R	10	R		±10% ±20%	0.85±0.1	
	JMK316 BJ226MD* ^{1,⋆3}		RoHS	22	X5R	10			±20%	0.85±0.1	
	JMK316 BJ476MD* ^{1,⋆3}		RoHS	47	X5R	10				0.85±0.1	
	JMK316 BJ106□L		RoHS	10	B/X5R* ²	5			±10%	1.6±0.2	
	JMK316 BJ226□L		RoHS	22	B/X5R	10		±20%	1.6±0.2		
	JMK316 BJ476ML* ³		RoHS	47	X5R	10		±20%	1.6±0.2		
	JMK316 BJ107ML* ^{1,⋆3}		RoHS	100	X5R	10			1.6±0.2		
4V	AMK316 BJ107ML* ¹		RoHS	100	X5R	10		1.6±0.2			

形名の□には静電容量許容差記号が入ります。

*1 高温負荷試験の試験電圧は定格電圧の 1.5 倍

*2 個別仕様の取扱いにより、X7R仕様に該当している場合があります。

*3 ご使用の回路や機器により、個別仕様の取り交わしが必要になります。
必ず正規販売チャンネルにお問い合わせください。

□ Please specify the capacitance tolerance code.

*1 Test Voltage of Loading at high temperature test is 1.5 time of the rated voltage.

*2 We may provide X7R for some items according to the individual specification.

*3 The exchange of individual specification is necessary depending on the application and circuit condition. Please contact Taiyo Yuden sales channel.

【温度特性 Temp.char. B7:X7R】

定格電圧 Rated Voltage	形 名 Ordering code	EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance 〔μF〕	温度特性 Temperature characteristics	tanδ Dissipation factor 〔%〕Max.	実装条件 Soldering method R: リフロー- Reflow soldering W: フロー- Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness 〔mm〕
50V	UMK316 B7 224□L	RoHS	0.22	X7R	2.5	R/W	±10% ±20%	1.6±0.2
	UMK316 B7 474□L	RoHS	0.47	X7R	3.5			1.6±0.2
	UMK316 B7 105□L	RoHS	1	X7R	3.5			1.6±0.2
25V	TMK316 B7 224□F	RoHS	0.22	X7R	2.5	R		1.15±0.1
	TMK316 B7 105□L	RoHS	1	X7R	3.5			1.6±0.2
	TMK316 B7 225□L	RoHS	2.2	X7R	3.5			1.6±0.2
	TMK316 B7 106□L ^{*1}	RoHS	10	X7R	10			1.6±0.2
16V	EMK316 B7 105□F	RoHS	1	X7R	3.5	R/W		1.15±0.1
	EMK316 B7 225□L	RoHS	2.2	X7R	3.5			1.6±0.2
	EMK316 B7 106□L ^{*1}	RoHS	10	X7R	10			1.6±0.2
10V	LMK316 B7 225□L	RoHS	2.2	X7R	3.5	R/W		1.6±0.2
	LMK316 B7 475□L	RoHS	4.7	X7R	5	R		1.6±0.2
	LMK316 B7 106□L ^{*1}	RoHS	10	X7R	5			1.6±0.2
6.3V	JMK316 B7 106□L	RoHS	10	X7R	5			

形名の□には静電容量許容差記号が入ります。

*1 高温負荷試験の試験電圧は定格電圧の 1.5 倍

□ Please specify the capacitance tolerance code.

*1 Test Voltage of Loading at high temperature test is 1.5 time of the rated voltage.

【温度特性 Temp.char. F:F/Y5V】

定格電圧 Rated Voltage	形 名 Ordering code		EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance 〔μF〕	温度特性 Temperature characteristics	tan δ Dissipation factor 〔%〕Max.	実装条件 Soldering method R: リフロー Reflow soldering W: フロー Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness 〔mm〕
50V	UMK316 F225ZG		RoHS	2.2	F/Y5V	7	R/W	+80% -20%	1.25±0.1
35V	GMK316 F475ZG		RoHS	4.7	F/Y5V	7	R		1.25±0.1
	GMK316 F106ZL		RoHS	10	F/Y5V	9			1.6±0.2
25V	TMK316 F106ZL		RoHS	10	F/Y5V	9			1.6±0.2
16V	EMK316 F106ZL		RoHS	10	F/Y5V	9			1.6±0.2
10V	LMK316 F475ZD		RoHS	4.7	F/Y5V	9			0.85±0.1
	LMK316 F106ZF		RoHS	10	F/Y5V	16			1.15±0.1
	LMK316 F226ZL		RoHS	22	F/Y5V	16			1.6±0.2
6.3V	JMK316 F106ZD		RoHS	10	F/Y5V	16		0.85±0.1	

■ 325TYPE

【温度特性 Temp.char. BJ:B/X5R】

定格電圧 Rated Voltage	形 名 Ordering code		EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance 〔μF〕	温度特性 Temperature characteristics	tan δ Dissipation factor 〔%〕Max.	実装条件 Soldering method R: リフロー Reflow soldering W: フロ Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness 〔mm〕
50V	UMK325 BJ105□H		RoHS	1	B/X5R*2	3.5	R/W	±10% ±20%	1.5±0.1
	UMK325 BJ475MM*1		RoHS	4.7	X5R	5	R	±20%	2.5±0.2
	UMK325 BJ106MM*1		RoHS	10	X5R	5			2.5±0.2
35V	GMK325 BJ225MN		RoHS	2.2	B/X5R	3.5			1.9±0.2
	GMK325 BJ475MN*1		RoHS	4.7	X5R	10			1.9±0.2
	GMK325 BJ106MN*1		RoHS	10	B/X5R	5			1.9±0.2
25V	TMK325 BJ106MD*1		RoHS	10	B/X5R	5			0.85±0.1
	TMK325 BJ225MH		RoHS	2.2	B/X5R*2	3.5			1.5±0.1
	TMK325 BJ335MN		RoHS	3.3	B/X5R*2	3.5			1.9±0.2
	TMK325 BJ475MN		RoHS	4.7	B/X5R*2	3.5			1.9±0.2
	TMK325 BJ106MN		RoHS	10	B/X5R	5			1.9±0.2
	TMK325 BJ106MM*1		RoHS	10	B/X5R	3.5			2.5±0.2
16V	EMK325 BJ106MD*1		RoHS	10	B/X5R	5			0.85±0.1
	EMK325 BJ226MD*1,*3		RoHS	22	B/X5R	10			0.85±0.1
	EMK325 BJ475MN		RoHS	4.7	B/X5R*2	3.5			1.9±0.2
	EMK325 BJ106MN		RoHS	10	B/X5R	3.5			1.9±0.2
	EMK325 BJ226MM*1		RoHS	22	B/X5R	5			2.5±0.2
	EMK325 BJ476MM*1		RoHS	47	X5R	10			2.5±0.2
10V	LMK325 BJ335MD		RoHS	3.3	B/X5R	3.5			0.85±0.1
	LMK325 BJ475MD		RoHS	4.7	B/X5R	5			0.85±0.1
	LMK325 BJ106MD*1		RoHS	10	B/X5R	5			0.85±0.1
	LMK325 BJ226MY*1		RoHS	22	B/X5R	5			1.9+0.1/-0.2
	LMK325 BJ106MN		RoHS	10	B/X5R*2	3.5			1.9±0.2
	LMK325 BJ226MM		RoHS	22	B/X5R	5			2.5±0.2
	LMK325 BJ476MM*1		RoHS	47	X5R	10			2.5±0.2
	LMK325 BJ107MM*1,*3		RoHS	100	X5R	10			2.5±0.3
6.3V	JMK325 BJ226MY		RoHS	22	B/X5R	5			1.9+0.1/-0.2
	JMK325 BJ107MY*1,*3		RoHS	100	X5R	10			1.9+0.1/-0.2
	JMK325 BJ476MN*1		RoHS	47	X5R	10			1.9±0.2
	JMK325 BJ476MM*1		RoHS	47	X5R	10			2.5±0.2
	JMK325 BJ107MM*1		RoHS	100	X5R	10			2.5±0.3

形名の□には静電容量許容差記号が入ります。

*1 高温負荷試験の試験電圧は定格電圧の 1.5 倍

*2 個別仕様の取交しにより、X7R仕様に対応している場合があります。

*3 ご使用の回路や機器により、個別仕様の取り交わしが必要になります。
必ず正規販売チャンネルにお問い合わせください。

□ Please specify the capacitance tolerance code.

*1 Test Voltage of Loading at high temperature test is 1.5 time of the rated voltage.

*2 We may provide X7R for some items according to the individual specification.

*3 The exchange of individual specification is necessary depending on the application and circuit condition. Please contact Taiyo Yuden sales channel.

【温度特性 Temp.char. B7:X7R】

定格電圧 Rated Voltage	形 名 Ordering code		EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance [μ F]	温度特性 Temperature characteristics	$\tan \delta$ Dissipation factor [%] Max.	実装条件 Soldering method R: リフロー Reflow soldering W: フロー Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness [mm]
50V	UMK325 B7 105□H		RoHS	1	X7R	3.5	R/W	$\pm 10\%$ $\pm 20\%$	1.5 $\pm$ 0.1
25V	TMK325 B7 225MH		RoHS	2.2	X7R	3.5	R	$\pm 20\%$	1.5 $\pm$ 0.1
	TMK325 B7 335MN		RoHS	3.3	X7R	3.5			1.9 $\pm$ 0.2
	TMK325 B7 475MN* ¹		RoHS	4.7	X7R	3.5			1.9 $\pm$ 0.2
	TMK325 B7 106MN* ¹		RoHS	10	X7R	5			1.9 $\pm$ 0.2
16V	EMK325 B7 475MN		RoHS	4.7	X7R	3.5			1.9 $\pm$ 0.2
10V	LMK325 B7 106MN		RoHS	10	X7R	3.5			1.9 $\pm$ 0.2

形名の□には静電容量許容差記号が入ります。

☐ Please specify the capacitance tolerance code.

*1 高温負荷試験の試験電圧は定格電圧の 1.5 倍

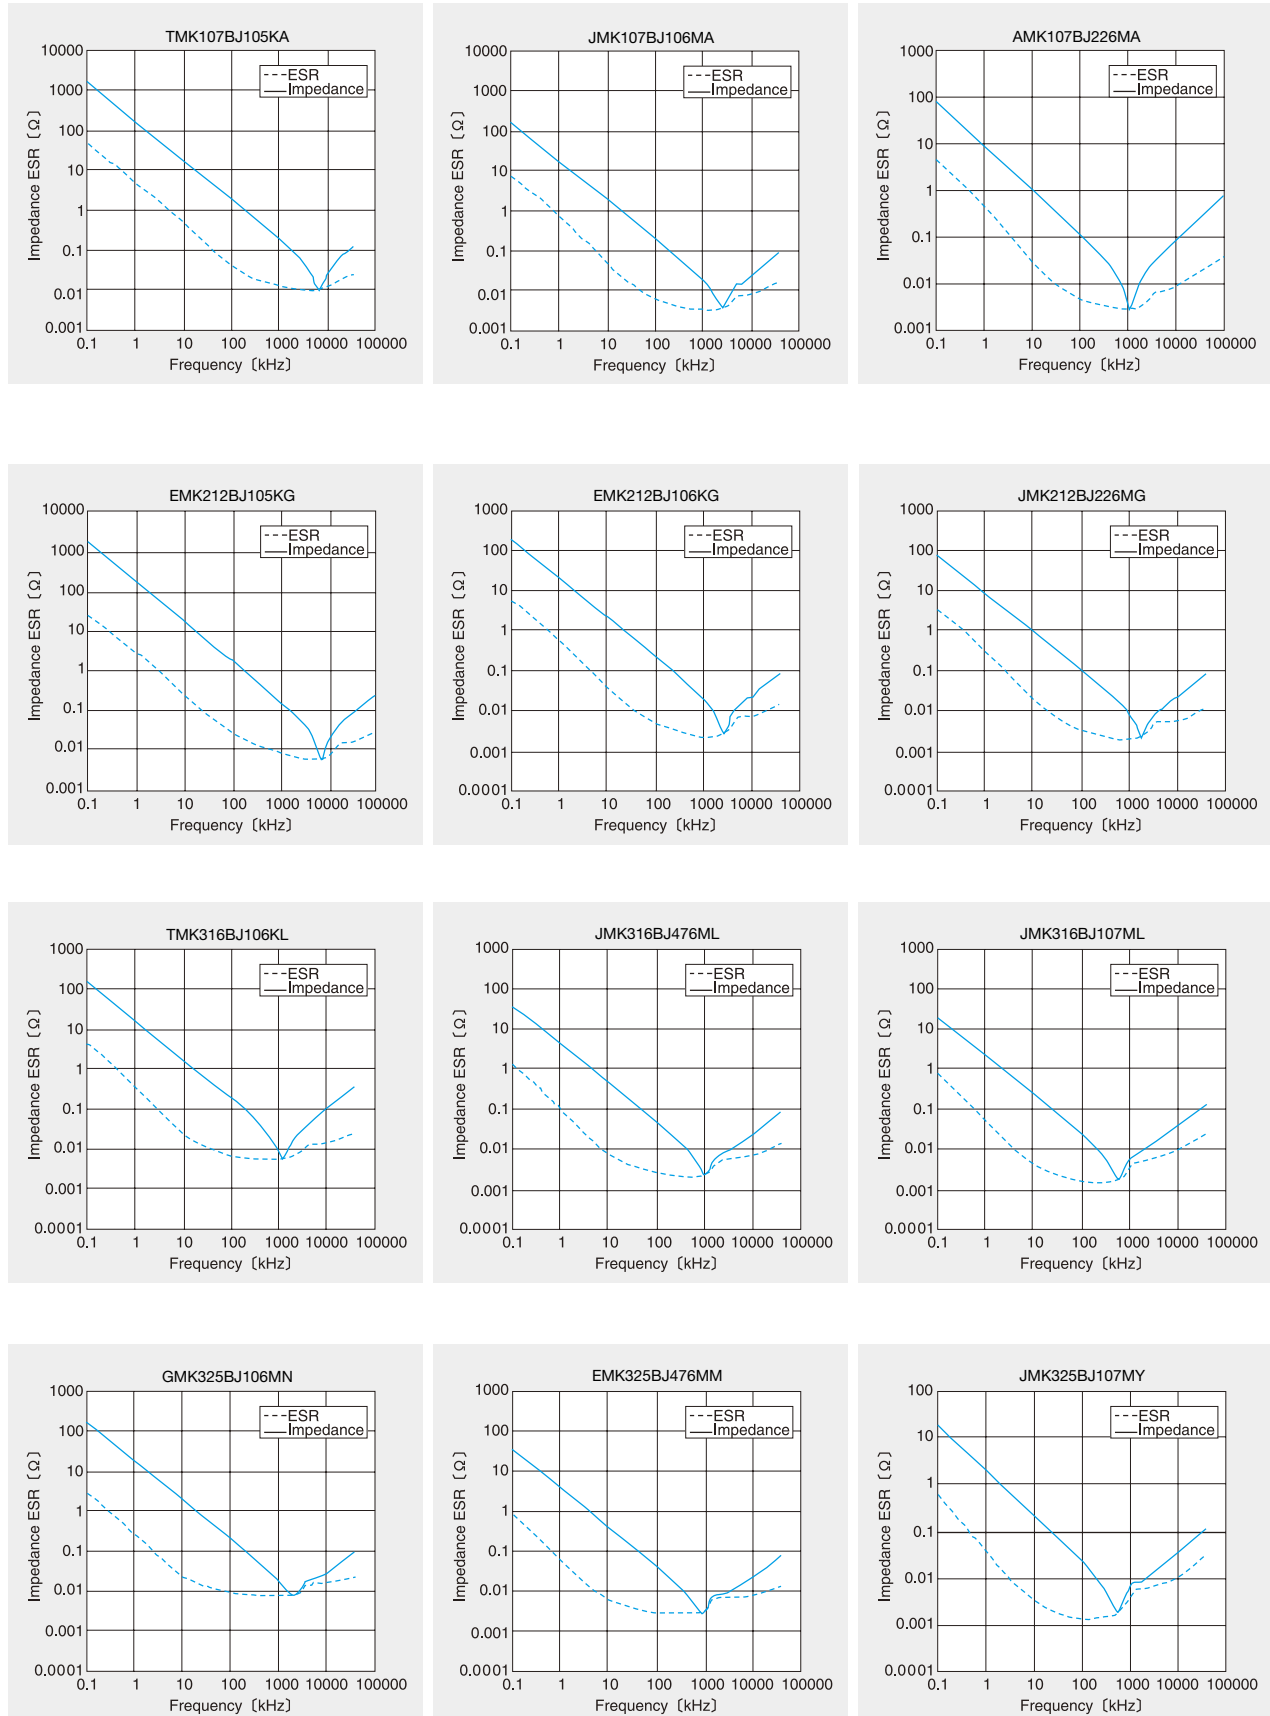
*1 Test Voltage of Loading at high temperature test is 1.5 time of the rated voltage.

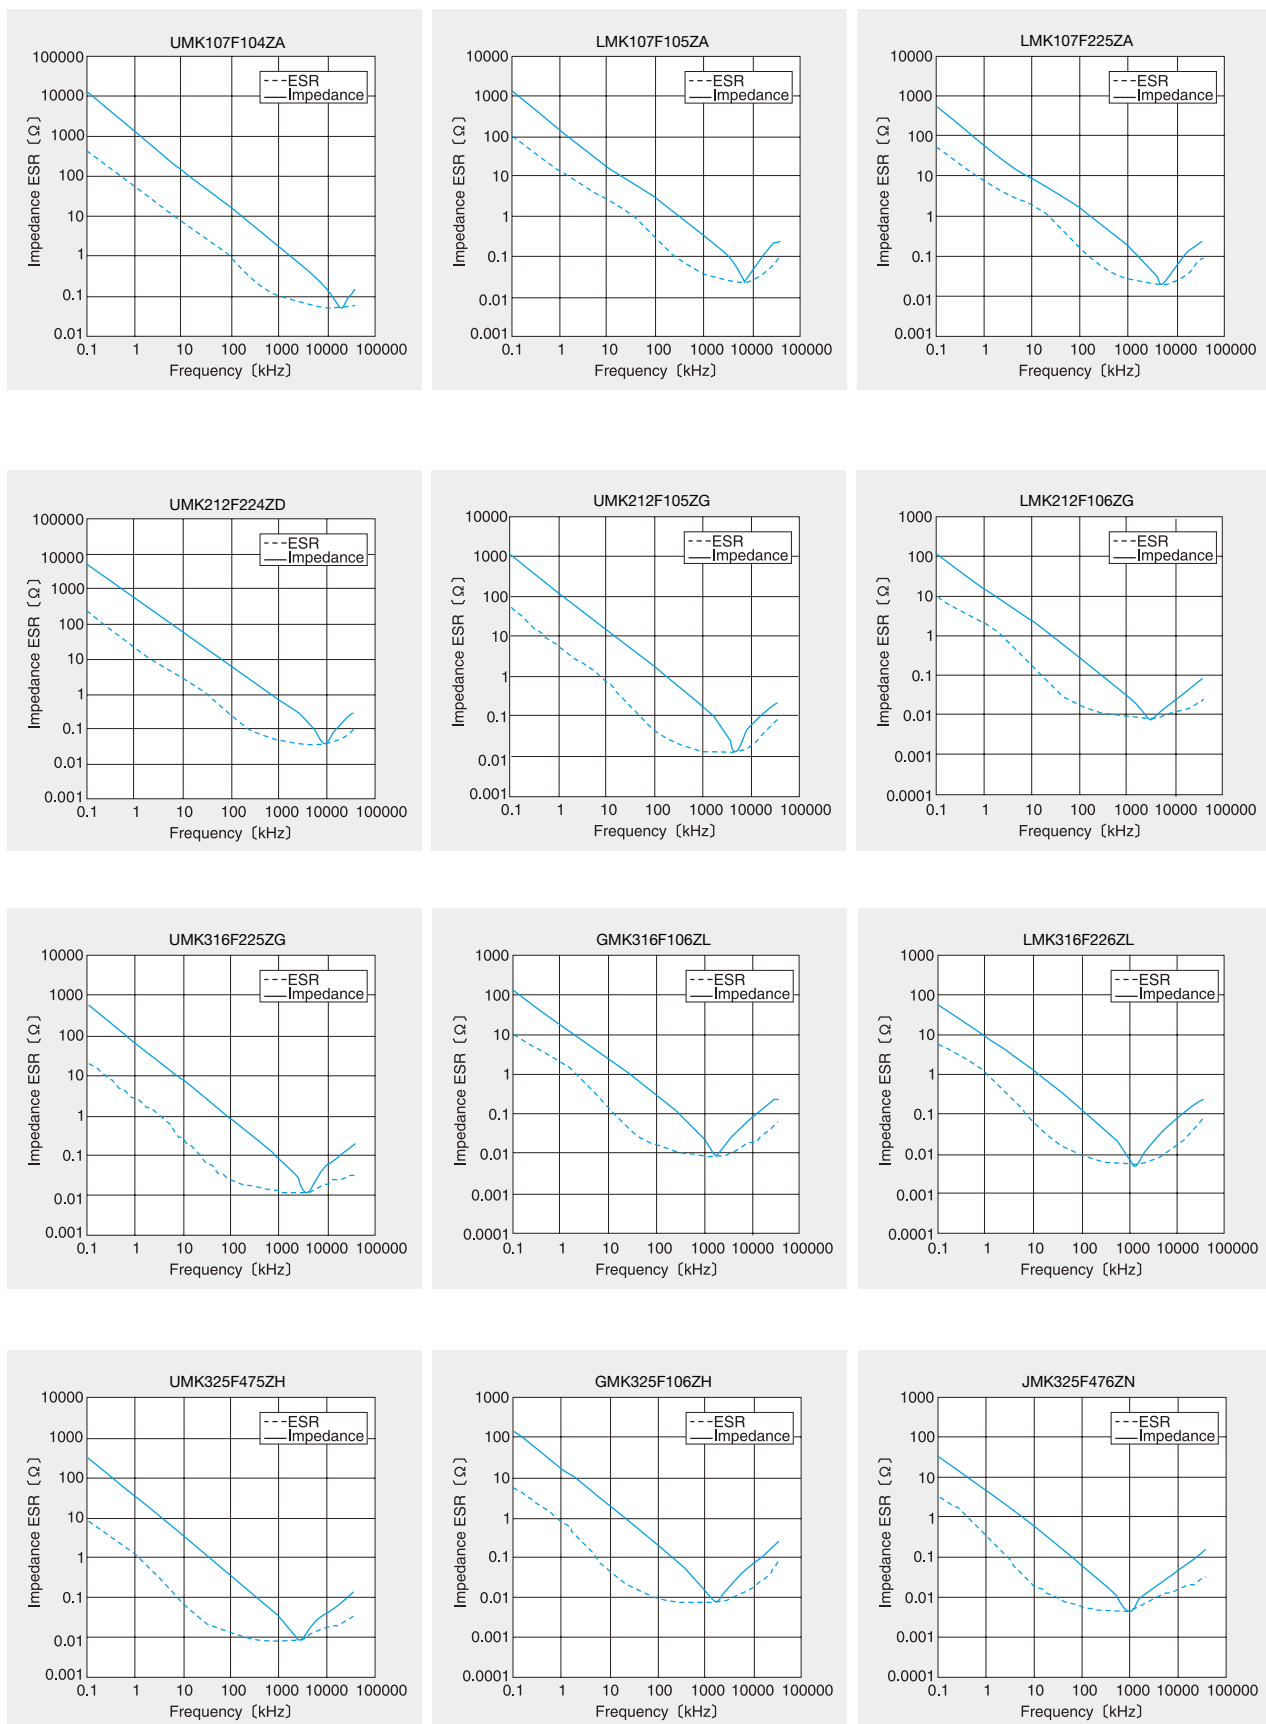
【温度特性 Temp.char. F:F/Y5V】

定格電圧 Rated Voltage	形 名 Ordering code		EHS (Environmental Hazardous Substances)	公 称 静電容量 Capacitance [μ F]	温度特性 Temperature characteristics	$\tan \delta$ Dissipation factor [%] Max.	実装条件 Soldering method R: リフロー Reflow soldering W: フロー Wave soldering	静電容量 許 容 差 Capacitance tolerance	厚 み Thickness [mm]
50V	UMK325 F475ZH		RoHS	4.7	F/Y5V	7	R	+80% -20%	1.5 $\pm$ 0.1
35V	GMK325 F106ZH		RoHS	10	F/Y5V	7			1.5 $\pm$ 0.1
16V	EMK325 F226ZN		RoHS	22	F/Y5V	16			1.9 $\pm$ 0.2
10V	LMK325 F106ZF		RoHS	10	F/Y5V	16			1.15 $\pm$ 0.1
	LMK325 F226ZN		RoHS	22	F/Y5V	16			1.9 $\pm$ 0.2
6.3V	JMK325 F476ZN		RoHS	47	F/Y5V	16			1.9 $\pm$ 0.2

インピーダンス・ESR—周波数特性例 Example of Impedance ESR vs. Frequency characteristics

・当社積層セラミックコンデンサ例 (Taiyo Yuden multilayer ceramic capacitor)





梱包 PACKAGING

①最小受注単位数 Minimum Quantity


■テーピング梱包 Taped packaging

形式(EIA) Type	製品厚み Thickness		標準数量 Standard quantity [pcs]	
	mm (inch)	code	紙テープ paper	エンボステープ Embossed tape
□MK042(01005)	0.2(0.008)	C	15000	—
□MK063(0201)	0.3(0.012)	P	15000	—
□2K096(0302)	0.3(0.012)	P	10000	—
	0.45(0.018)	K		
□WK105(0204)	0.3(0.012)	P	10000	—
□MK105(0402)	0.5(0.020)	V, W	10000	—
□VK105(0402)		W		
□MK107(0603)	0.45(0.018)	K	4000	—
	0.5(0.020)	V	—	4000
□WK107(0306)	0.8(0.031)	A	4000	—
□2K110(0504)	0.5(0.020)	V	4000	—
	0.8(0.031)	A	4000	—
	0.6(0.024)	B	4000	—
□MK212(0805)	0.45(0.018)	K	4000	—
	0.85(0.033)	D	4000	—
	1.25(0.049)	G	—	3000
□4K212(0805)	0.85(0.033)	D	4000	—
	0.85(0.033)	D	4000	—
□2K212(0805)	0.85(0.033)	D	4000	—
	1.15(0.045)	F	—	3000
	1.25(0.049)	G	—	2000
□MK316(1206)	1.6(0.063)	L	—	2000
	0.85(0.033)	D	—	2000
	1.15(0.045)	F		
□MK325(1210)	1.5(0.059)	H		
	1.9(0.075)	N		
	2.0max(0.079)	Y	—	2000
□MK432(1812)	2.5(0.098)	M	—	500(T), 1000(P)
	2.5(0.098)	M	—	500


②テーピング材質 Taping material

紙テープ Card board carrier tape

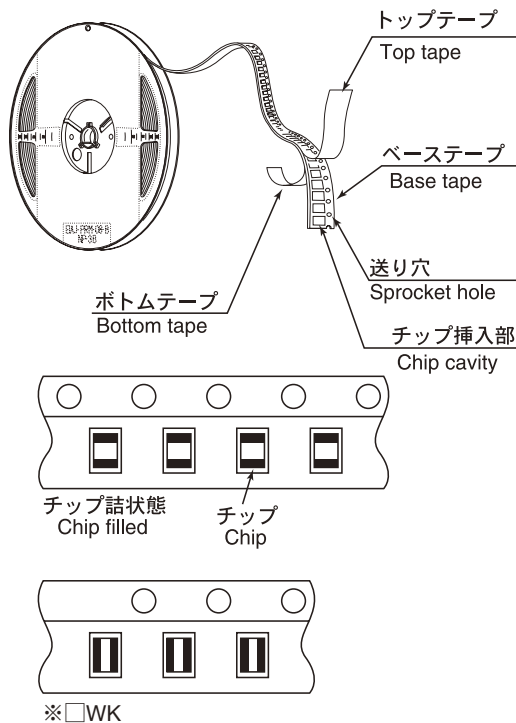
※プレスポケットタイプは、
ボトムテープ無し。



エンボステープ Embossed Tape

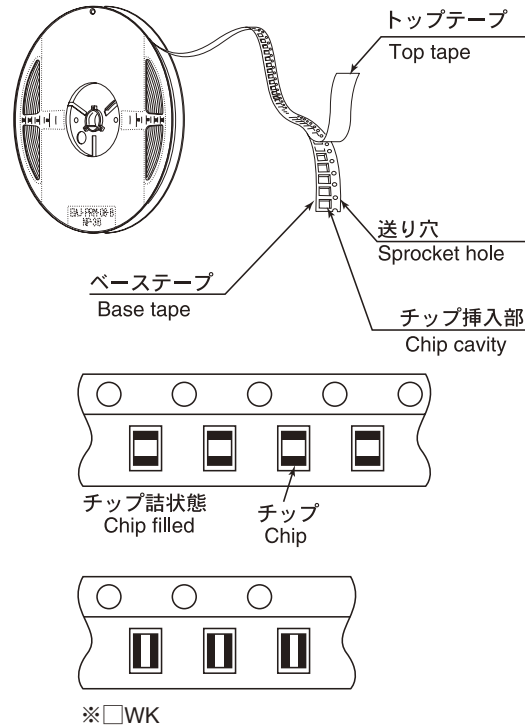


③バルクカセット Bulk Cassette

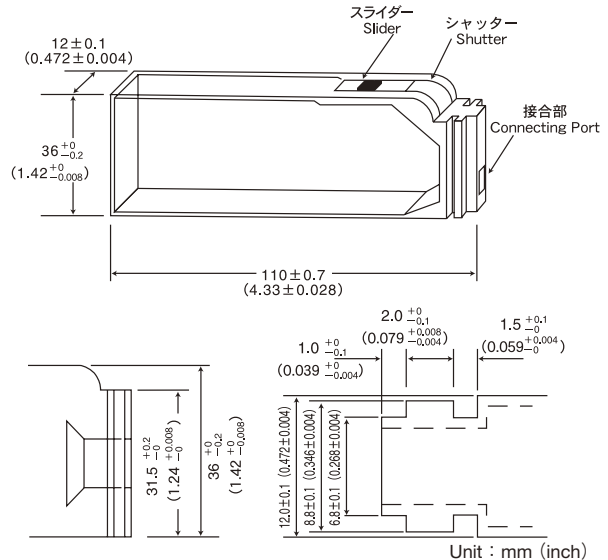

105, 107, 212形状で個別対応致しますのでお問い合わせ下さい。
Please contact any of our offices for accepting your requirement according to dimensions 0402, 0603, 0805.(inch)


梱包 PACKAGING

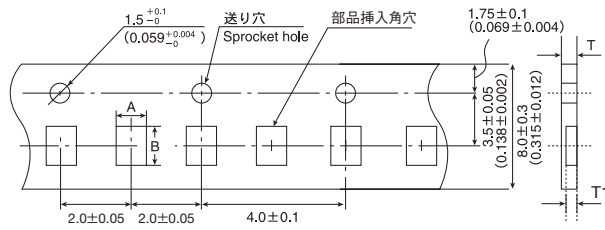③テーピング寸法 Taping dimensions 紙テープ Paper Tape (8mm幅) (0.315inches wide)




Type (EIA)	チップ挿入部 Chip Cavity		挿入ピッチ Insertion Pitch	テープ厚み Tape Thickness	
	A	B		T	T1
□MK042 (01005)	0.25 (0.010)	0.45 (0.018)	2.0 ± 0.05 (0.079 ± 0.002)	0.36max. (0.014)	0.27max. (0.011)
□MK063 (0201)	0.37 (0.016)	0.67 (0.027)	2.0 ± 0.05 (0.079 ± 0.002)	0.45max. (0.018)	0.42max. (0.017)
□WK105 (0204)	0.65 (0.026)	1.15 (0.045)	2.0 ± 0.05 (0.079 ± 0.002)	0.45max. (0.018max)	0.42max. (0.017max)

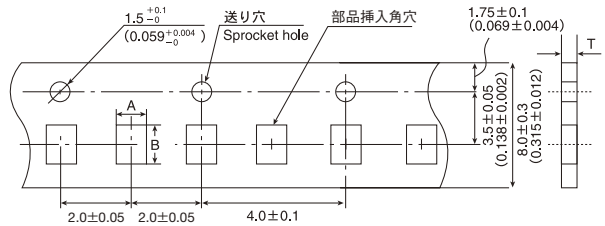Unit : mm (inch)



Type (EIA)	チップ挿入部 Chip Cavity		挿入ピッチ Insertion Pitch	テープ厚み Tape Thickness	
	A	B		T	
□2K096 (0302)	0.72 (0.028)	1.02 (0.040)	2.0 ± 0.05 (0.079 ± 0.002)	0.45max.(0.018max) 0.6max.(0.024max)	
□MK105 (0402)	0.65 (0.026)	1.15 (0.045)	2.0 ± 0.05 (0.079 ± 0.002)	0.8max. (0.031max.)	

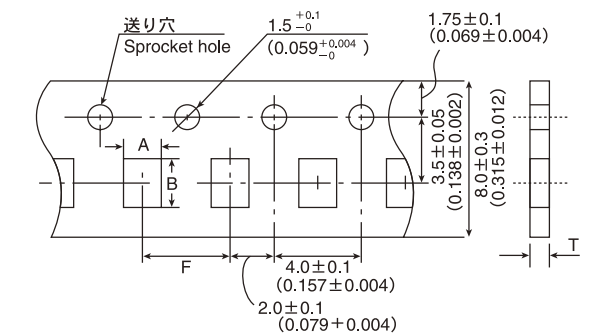
Unit : mm (inch)



Type (EIA)	チップ挿入部 Chip Cavity		挿入ピッチ Insertion Pitch	テープ厚み Tape Thickness	
	A	B		T	
□MK107 (0603)	1.0 (0.039)	1.8 (0.071)	4.0 ± 0.1 (0.157 ± 0.004)	1.1max. (0.043max.)	
□WK107 (0306)					
□2K110 (0504)	1.15 (0.045)	1.55 (0.061)	4.0 ± 0.1 (0.157 ± 0.004)	1.0max. (0.039max.)	
□MK212 (0805)	1.65 (0.065)	2.4 (0.094)	4.0 ± 0.1 (0.157 ± 0.004)	1.1max. (0.043max.)	
□WK212 (0508)					
□4K212 (0805)					
□2K212 (0805)					
□MK316 (1206)	2.0 (0.079)	3.6 (0.142)			

Unit : mm (inch)

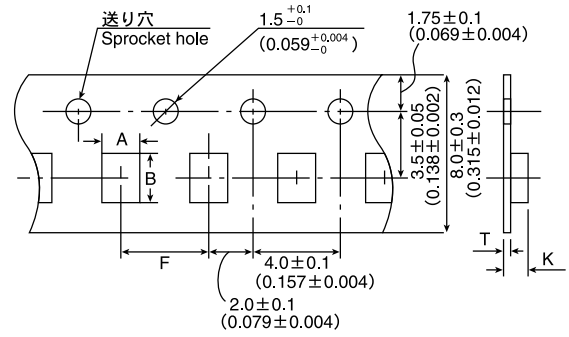
エンボステープ Embossed tape (8mm幅) (0.315inches wide)



Type (EIA)	チップ挿入部 Chip cavity		挿入ピッチ Insertion Pitch	テープ厚み Tape Thickness	
	A	B		K	T
□WK107 (0306)	1.0 (0.039)	1.8 (0.071)		1.3max. (0.051max.)	0.25 ± 0.1 (0.01 ± 0.004)
□MK212 (0805)	1.65 (0.065)	2.4 (0.094)	4.0 ± 0.1 (0.157 ± 0.004)		
□MK316 (1206)	2.0 (0.079)	3.6 (0.142)		3.4max. (0.134max.)	0.6max. (0.024max.)
□MK325 (1210)	2.8 (0.110)	3.6 (0.142)			

Unit : mm (inch)

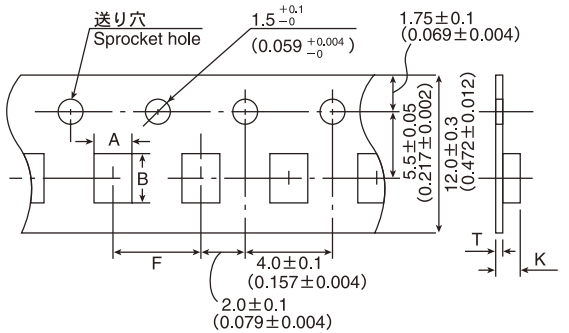
エンボステープ Embossed tape (12mm幅) (0.472inches wide)




Type (EIA)	チップ挿入部 Chip cavity		挿入ピッチ Insertion Pitch	テープ厚み Tape Thickness	
	A	B		K	T
□MK432 (1812)	3.7 (0.146)	4.9 (0.193)	8.0 ± 0.1 (0.315 ± 0.004)	4.0max. (0.157max.)	0.6max. (0.024max.)

Unit : mm (inch)

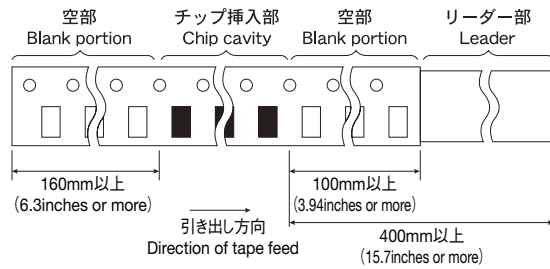④ リーダー部／空部 Leader and Blank portion




⑤ リール寸法 Reel size

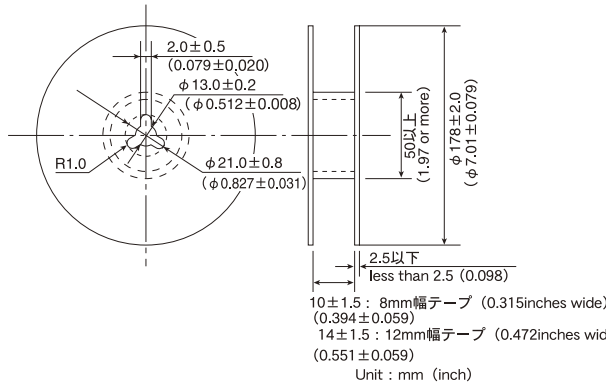


⑥ トップテープ強度 Top Tape Strength


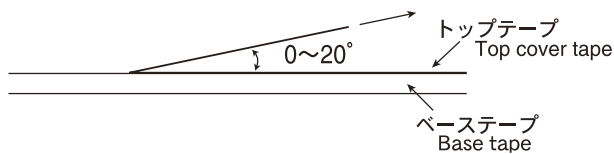
トップテープのはがし力とは図矢印方向にて0.1～0.7Nとなります。
The top tape requires a peel-off force of 0.1～0.7N in the direction of the arrow as illustrated below.



Multilayer Ceramic Capacitor Chips

Item		Specified Value				Test Methods and Remarks
		Temperature Compensating (Class 1)		High Permittivity (Class 2)		
		Standard	High Frequency Type	Standard Note1	High Value	
1.Operating Temperature Range		-55 to +125℃		BJ : -55 to +125℃ F : -25 to +85℃	-25 to +85℃	High Capacitance Type BJ (X7R) : -55~+125℃, BJ (X5R) : -55~+85℃ E (Y5U) : -30~+85℃, F (Y5V) : -30~+85℃
2.Storage Temperature Range		-55 to +125℃		BJ : -55 to +125℃ F : -25 to +85℃	-25 to +85℃	High Capacitance Type BJ (X7R) : -55~+125℃, BJ (X5R) : -55~+85℃ E (Y5U) : -30~+85℃, F (Y5V) : -30~+85℃
3.Rated Voltage		50VDC,25VDC, 16VDC	16VDC 50VDC	50VDC,25VDC	50VDC,35VDC,25VDC 16VDC,10VDC,6.3VDC 4DVC, 2.5VDC	
4.Withstanding Voltage Between terminals		No breakdown or damage	No abnormality	No breakdown or damage		Applied voltage: Rated voltage×3 (Class 1) Rated voltage×2.5 (Class 2) Duration: 1 to 5 sec. Charge/discharge current: 50mA max. (Class 1,2)
5.Insulation Resistance		10000 MΩ min.		500 MΩ μF. or 10000 MΩ., whichever is the smaller. Note 5		Applied voltage: Rated voltage Duration: 60±5 sec. Charge/discharge current: 50mA max.
6.Capacitance (Tolerance)		0.5 to 5 pF: ±0.25 pF 1 to 10pF: ±0.5 pF 5 to 10 pF: ±1 pF 11 pF or over: ± 5% ±10% 105TYPERR, SΔ, TΔ, UΔ only 0.5~2pF: ±0.1pF 2.2~20pF: ±5%	0.5 to 2 pF : ±0.1 pF 2.2 to 5.1 pF : ±5%	BJ: ±10%, ±20% F : +80% -20%	BJ : ±10%、±20% F : -20% / +80%	Measuring frequency : Class1 : 1MHz±10% (C≤1000pF) 1 k Hz±10% (C>1000pF) Class2 : 1 k Hz±10% (C≤10 μF) 120Hz±10Hz (C>10 μF) Measuring voltage : Note 4 Class1 : 0.5~5Vrms (C≤1000pF) 1±0.2Vrms (C>1000pF) Class2 : 1±0.2Vrms (C≤10 μF) 0.5±0.1Vrms (C>10 μF) Bias application: None
7.Q or Tangent of Loss Angle (tan δ)		Under 30 pF : Q≥400 + 20C 30 pF or over : Q≥1000 C= Nominal capacitance	Refer to detailed specification	BJ: 2.5% max. (50V, 25V) F: 5.0% max. (50V, 25V) Note 4	BJ : 2.5% max. F : 7% max. Note 4	Multilayer: Measuring frequency : Class1 : 1MHz±10% (C≤1000pF) 1 k Hz±10% (C>1000pF) Class2 : 1 k Hz±10% (C≤10 μF) 120Hz±10Hz (C>10 μF) Measuring voltage : Note 4 Class1 : 0.5~5Vrms (C≤1000pF) 1±0.2Vrms (C>1000pF) Class2 : 1±0.2Vrms (C≤10 μF) 0.5±0.1Vrms (C>10 μF) Bias application: None High-Frequency-Multilayer: Measuring frequency: 1GHz Measuring equipment: HP4291A Measuring jig: HP16192A
8.Temperature Characteristic of Capacitance	(Without voltage application)	CK : 0±250 CJ : 0±120 CH : 0±60 CG : 0±30 RH : -220±60 SK : -330±250 SJ : -330±120 SH : -330±60 TK : -470±250 TJ : -470±120 UK : -750±250 UJ : -750±120 SL : +350 to -1000 (ppm/℃)	CH : 0±60 RH : -220±60 (ppm/℃)	BJ : ±10% (-25~85℃) F : +30% (-25~85℃) -80 BJ (X7R) : ±15% F (Y5V) : +22% -82	BJ : ±10% (-25~+85℃) F : +30% / -80% (-25~+85℃) BJ (X7R, X5R) : ±15% F (Y5V) : +22% / -82%	According to JIS C 5102 clause 7.12. Temperature compensating: Measurement of capacitance at 20℃ and 85℃ shall be made to calculate temperature characteristic by the following equation. $\frac{(C_{85}-C_{20})}{C_{20} \times \Delta T} \times 10^6 \text{ (ppm/℃)}$ High permittivity: Change of maximum capacitance deviation in step 1 to 5 Temperature at step 1: +20℃ Temperature at step 2: minimum operating temperature Temperature at step 3: +20℃ (Reference temperature) Temperature at step 4: maximum operating temperature Temperature at step 5: +20℃ Reference temperature for X7R, X5R, Y5U and Y5V shall be +25℃
9.Resistance to Flexure of Substrate		Appearance: No abnormality Capacitance change: Within ±5% or ±0.5 pF, whichever is larger.	Appearance: No abnormality Capacitance change: Within±0.5 pF	Appearance: No abnormality Capacitance change: BJ : Within ±12.5% F : Within ±30%		Warp: 1mm Testing board: glass epoxy-resin substrate Thickness: 1.6mm (063 TYPE : 0.8mm) The measurement shall be made with board in the bent position.  (Unit: mm)

Multilayer Ceramic Capacitor Chips

Item	Specified Value				Test Methods and Remarks
	Temperature Compensating (Class 1)		High Permittivity (Class 2)		
	Standard	High Frequency Type	Standard Note1	High Value	
10.Body Strength	—	No mechanical damage.	—	—	High Frequency Multilayer: Applied force: 5N Duration: 10 sec.  (LW Reverse)
11.Adhesion of Electrode	No separation or indication of separation of electrode.				Applied force: 5N (01005, 0201, 0302 TYPE 2N) Duration: 30±5 sec.  Cross-section
12.Solderability	At least 95% of terminal electrode is covered by new solder.				Solder temperature: 230±5℃ Duration: 4±1 sec.
13.Resistance to soldering	Appearance: No abnormality Capacitance change: Within ±2.5% or ±0.25pF, whichever is larger. Q: Initial value Insulation resistance: Initial value Withstanding voltage (between terminals): No abnormality	Appearance: No abnormality Capacitance change: Within ±2.5% Q: Initial value Insulation resistance: Initial value Withstanding voltage (between terminals): No abnormality	Appearance: No abnormality Capacitance change: Within ±7.5% (BJ) Within ±20% (F) tan δ: Initial value Note 4 Insulation resistance: Initial value Withstanding voltage (between terminals): No abnormality		Preconditioning: Thermal treatment (at 150℃ for 1 hr) (Applicable to Class 2.) Solder temperature: 270±5℃ Duration: 3±0.5 sec. Preheating conditions: 80 to 100℃, 2 to 5 min. or 5 to 10 min. 150 to 200℃, 2 to 5 min. or 5 to 10 min. Recovery: Recovery for the following period under the standard condition after the test. 6~24 hrs (Class 1) 24±2 hrs (Class 2)
14.Thermal shock	Appearance: No abnormality Capacitance change: Within ±2.5% or ±0.25pF, whichever is larger. Q: Initial value Insulation resistance: Initial value Withstanding voltage (between terminals): No abnormality	Appearance: No abnormality Capacitance change: Within ±0.25pF Q: Initial value Insulation resistance: Initial value Withstanding voltage (between terminals): No abnormality	Appearance: No abnormality Capacitance change: Within ±7.5% (BJ) Within ±20% (F) tan δ: Initial value Note 4 Insulation resistance: Initial value Withstanding voltage (between terminals): No abnormality		Preconditioning: Thermal treatment (at 150℃ for 1 hr) (Applicable to Class 2.) Conditions for 1 cycle: Step 1: Minimum operating temperature $+0_{-3}^{\circ}\text{C}$ 30±3 min. Step 2: Room temperature 2 to 3 min. Step 3: Maximum operating temperature -0_{+3}°C 30±3 min. Step 4: Room temperature 2 to 3 min. Number of cycles: 5 times Recovery after the test: 6~24 hrs (Class 1) 24±2 hrs (Class 2)
15.Damp Heat (steady state)	Appearance: No abnormality Capacitance change: Within ±5% or ±0.5pF, whichever is larger. Q: $C\geq 30\text{ pF}$: $Q\geq 350$ $10\leq C<30\text{ pF}$: $Q\geq 275+2.5C$ $C<10\text{ pF}$: $Q\geq 200+10C$ C: Nominal capacitance Insulation resistance: 1000 MΩ min.	Appearance: No abnormality Capacitance change: Within ±0.5pF, Insulation resistance: 1000 MΩ min.	Appearance: No abnormality Capacitance change: BJ: Within ±12.5% F: Within ±30% tan δ: BJ: 5.0% max. F: 7.5% max. Note 4 Insulation resistance: 50 MΩ μF or 1000 MΩ whichever is smaller. Note 5	Appearance: No abnormality Capacitance change: BJ: Within ±12.5% Note 4 tan δ: BJ: 5.0% max. Note 4. F: 11.0% max. Insulation resistance: 50 MΩ μF or 1000 MΩ whichever is smaller. Note 5	Multilayer : Preconditioning: Thermal treatment (at 150℃ for 1 hr) (Applicable to Class 2.) Temperature: 40±2℃ Humidity: 90 to 95% RH Duration: 500 $+24_{-0}^{\text{hrs}}$ Recovery: Recovery for the following period under the standard condition after the removal from test chamber. 6~24 hrs (Class 1) 24±2 hrs (Class 2) High-Frequency Multilayer: Temperature: 60±2℃ Humidity: 90 to 95% RH Duration: 500 $+24_{-0}^{\text{hrs}}$ Recovery: Recovery for the following period under the standard condition after the removal from test chamber. 6~24 hrs (Class 1)

Multilayer Ceramic Capacitor Chips

Item	Specified Value				Test Methods and Remarks
	Temperature Compensating (Class 1)		High Permittivity (Class 2)		
	Standard	High Frequency Type	Standard Note1	High Value	
16.Loading under Damp Heat	Appearance: No abnormality Capacitance change: Within $\pm 7.5\%$ or $\pm 0.75\text{pF}$, whichever is larger. Q: $C\geq 30\text{ pF}$: $Q\geq 200$ $C<30\text{ pF}$: $Q\geq 100 + 10C/3$ C : Nominal capacitance Insulation resistance: 500 M Ω min.	Appearance: No abnormality Capacitance change: $C\leq 2\text{ pF}$: Within $\pm 0.4\text{ pF}$ $C>2\text{ pF}$: Within $\pm 0.75\text{ pF}$ C : Nominal capacitance Insulation resistance: 500 M Ω min.	Appearance: No abnormality Capacitance change: BJ: Within $\pm 12.5\%$ F: Within $\pm 30\%$ Note 4 tan δ : BJ: 5.0% max. F: 7.5% max. Note 4 Insulation resistance: 25 M $\Omega\mu\text{F}$ or 500 M Ω , whichever is the smaller. Note 5	Appearance: No abnormality Capacitance change: BJ: Within $\pm 12.5\%$ F : Within $\pm 30\%$ Note 4 tan δ : BJ : 5.0% max. F : 11% max. Note 4 Insulation resistance: 25 M $\Omega\mu\text{F}$ or 500 M Ω , whichever is the smaller. Note 5	According to JIS C 5102 Clause 9. 9. Multilayer: Preconditioning: Voltage treatment (Class 2) Temperature: $40\pm 2^{\circ}\text{C}$ Humidity: 90 to 95% RH Duration: $500\begin{smallmatrix}+24\\-0\end{smallmatrix}\text{hrs}$ Applied voltage: Rated voltage Charge and discharge current: 50mA max. (Class 1,2) Recovery: Recovery for the following period under the standard condition after the removal from test chamber. 6~24 hrs (Class 1) 24 ± 2 hrs (Class 2) High—Frequency Multilayer: Temperature: $60\pm 2^{\circ}\text{C}$ Humidity: 90 to 95% RH Duration: $500\begin{smallmatrix}+24\\-0\end{smallmatrix}\text{hrs}$ Applied voltage: Rated voltage Charge and discharge current: 50mA max. Recovery: 6~24 hrs of recovery under the standard condition after the removal from test chamber.
17.Loading at High Temperature	Appearance: No abnormality Capacitance change: Within $\pm 3\%$ or $\pm 0.3\text{pF}$, whichever is larger. Q: $C\geq 30\text{ pF}$: $Q\geq 350$ $10\leq C<30\text{ pF}$: $Q\geq 275 + 2.5C$ $C<10\text{ pF}$: $Q\geq 200 + 10C$ C : Nominal capacitance Insulation resistance: 1000 M Ω min.	Appearance: No abnormality Capacitance change: Within $\pm 3\%$ or $\pm 0.3\text{pF}$, whichever is larger. Insulation resistance: 1000 M Ω min.	Appearance: No abnormality Capacitance change: BJ: Within $\pm 12.5\%$ F: Within $\pm 30\%$ Note 4 tan δ : BJ: 4.0% max. F: 7.5% max. Note 4 Insulation resistance: 50 M $\Omega\mu\text{F}$ or 1000 M Ω , whichever is smaller. Note 5	Appearance: No abnormality Capacitance change: BJ : Within $\pm 12.5\%$ Within $\pm 20\% \times \times$ Within $\pm 25\% \times \times$ F : Within $\pm 30\%$ Note 4 tan δ : BJ : 5.0% max. F : 11% max. Note 4 Insulation resistance: 50 M $\Omega\mu\text{F}$ or 1000 M Ω , whichever is smaller. Note 5	According to JIS C 5102 clause 9.10. Multilayer: Preconditioning: Voltage treatment (Class 2) Temperature: $125\pm 3^{\circ}\text{C}$ (Class 1, Class 2: B, BJ (X7R)) $85\pm 2^{\circ}\text{C}$ (Class 2: BJ,F) Duration: $1000\begin{smallmatrix}+48\\-0\end{smallmatrix}\text{hrs}$ Applied voltage: Rated voltage $\times 2$ Note 6 Recovery: Recovery for the following period under the standard condition after the removal from test chamber. 6~24 hrs (Class 1) 24 ± 2 hrs (Class 2) High—Frequency Multilayer: Temperature: $125\pm 3^{\circ}\text{C}$ (Class 1) Duration: $1000\begin{smallmatrix}+48\\-0\end{smallmatrix}\text{hrs}$ Applied voltage: Rated voltage $\times 2$ Recovery: 6~24 hrs of recovery under the standard condition after the removal from test chamber.

Note 1 :For 105 type, specified in "High value".

Note 2 :Thermal treatment (Multilayer): 1 hr of thermal treatment at $150 \pm 0/-10^\circ\text{C}$ followed by 24 ± 2 hrs of recovery under the standard condition shall be performed before the measurement.

Note 3 :Voltage treatment (Multilayer): 1 hr of voltage treatment under the specified temperature and voltage for testing followed by 24 ± 2 hrs of recovery under the standard condition shall be performed before the measurement.





Note 4, 5 :The figure indicates typical inspection. Please refer to individual specifications.

Note 6 :Some of the parts are applicable in rated voltage $\times 1.5$. Please refer to individual specifications.
























Note on standard condition: "standard condition" referred to herein is defined as follows: 5 to 35°C of temperature, 45 to 85% relative humidity, and 86 to 106kPa of air pressure.

When there are questions concerning measurement results: In order to provide correlation data, the test shall be conducted under condition of $20 \pm 2^\circ\text{C}$ of temperature, 60 to 70% relative humidity, and 86 to 106kPa of air pressure. Unless otherwise specified, all the tests are conducted under the "standard condition."

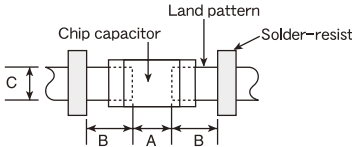Precautions on the use of Multilayer Ceramic Capacitors

Stages	Precautions	Technical considerations																																																																																																																															
1.Circuit Design	Verification of operating environment, electrical rating and performance 1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any capacitors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications. Operating Voltage (Verification of Rated voltage) 1. The operating voltage for capacitors must always be lower than their rated values. If an AC voltage is loaded on a DC voltage, the sum of the two peak voltages should be lower than the rated value of the capacitor chosen. For a circuit where both an AC and a pulse voltage may be present, the sum of their peak voltages should also be lower than the capacitor's rated voltage. 2. Even if the applied voltage is lower than the rated value, the reliability of capacitors might be reduced if either a high frequency AC voltage or a pulse voltage having rapid rise time is present in the circuit.																																																																																																																																
2.PCB Design	Pattern configurations (Design of Land-patterns) 1. When capacitors are mounted on a PCB, the amount of solder used (size of fillet) can directly affect capacitor performance. Therefore, the following items must be carefully considered in the design of solder land patterns: (1) The amount of solder applied can affect the ability of chips to withstand mechanical stresses which may lead to breaking or cracking. Therefore, when designing land-patterns it is necessary to consider the appropriate size and configuration of the solder pads which in turn determines the amount of solder necessary to form the fillets. (2) When more than one part is jointly soldered onto the same land or pad, the pad must be designed so that each component's soldering point is separated by solder-resist.	1.The following diagrams and tables show some examples of recommended patterns to prevent excessive solder amounts. (larger fillets which extend above the component end terminations) Examples of improper pattern designs are also shown. (1) Recommended land dimensions for a typical chip capacitor land patterns for PCBs  Recommended land dimensions for wave-soldering (unit: mm) <table><tr><th>Type</th><th>107</th><th>212</th><th>316</th><th>325</th></tr><tr><td rowspan="2">Size</td><td>L</td><td>1.6</td><td>2.0</td><td>3.2</td></tr><tr><td>W</td><td>0.8</td><td>1.25</td><td>1.6</td><td>2.5</td></tr><tr><td>A</td><td>0.8~1.0</td><td>1.0~1.4</td><td>1.8~2.5</td><td>1.8~2.5</td></tr><tr><td>B</td><td>0.5~0.8</td><td>0.8~1.5</td><td>0.8~1.7</td><td>0.8~1.7</td></tr><tr><td>C</td><td>0.6~0.8</td><td>0.9~1.2</td><td>1.2~1.6</td><td>1.8~2.5</td></tr></table> Recommended land dimensions for reflow-soldering (unit: mm) <table><tr><th>Type</th><th>042</th><th>063</th><th>105</th><th>107</th><th>212</th><th>316</th><th>325</th><th>432</th></tr><tr><td rowspan="2">Size</td><td>L</td><td>0.4</td><td>0.6</td><td>1.0</td><td>1.6</td><td>2.0</td><td>3.2</td><td>4.5</td></tr><tr><td>W</td><td>0.2</td><td>0.3</td><td>0.5</td><td>0.8</td><td>1.25</td><td>1.6</td><td>2.5</td></tr><tr><td>A</td><td>0.15~0.25</td><td>0.20~0.30</td><td>0.45~0.55</td><td>0.8~1.0</td><td>0.8~1.2</td><td>1.8~2.5</td><td>1.8~2.5</td><td>2.5~3.5</td></tr><tr><td>B</td><td>0.10~0.20</td><td>0.20~0.30</td><td>0.40~0.50</td><td>0.6~0.8</td><td>0.8~1.2</td><td>1.0~1.5</td><td>1.0~1.5</td><td>1.5~1.8</td></tr><tr><td>C</td><td>0.15~0.30</td><td>0.25~0.40</td><td>0.45~0.55</td><td>0.6~0.8</td><td>0.9~1.6</td><td>1.2~2.0</td><td>1.8~3.2</td><td>2.3~3.5</td></tr></table> Excess solder can affect the ability of chips to withstand mechanical stresses. Therefore, please take proper precautions when designing land-patterns.  <table><tr><th>Type</th><th>212 (4 circuits)</th></tr><tr><td rowspan="2">Size</td><td>L</td><td>2.0</td></tr><tr><td>W</td><td>1.25</td></tr><tr><td>a</td><td>0.5~0.6</td></tr><tr><td>b</td><td>0.5~0.6</td></tr><tr><td>c</td><td>0.2~0.3</td></tr><tr><td>d</td><td>0.5</td></tr></table> <table><tr><th>Type</th><th>212 (2 circuits)</th><th>110 (2 circuits)</th><th>096 (2 circuits)</th></tr><tr><td rowspan="2">Size</td><td>L</td><td>2.0</td><td>1.37</td><td>0.9</td></tr><tr><td>W</td><td>1.25</td><td>1.0</td><td>0.6</td></tr><tr><td>a</td><td>0.5~0.6</td><td>0.35~0.45</td><td>0.25~0.35</td></tr><tr><td>b</td><td>0.5~0.6</td><td>0.55~0.65</td><td>0.15~0.25</td></tr><tr><td>c</td><td>0.5~0.6</td><td>0.3~0.4</td><td>0.15~0.25</td></tr><tr><td>d</td><td>1.0</td><td>0.64</td><td>0.45</td></tr></table>	Type	107	212	316	325	Size	L	1.6	2.0	3.2	W	0.8	1.25	1.6	2.5	A	0.8~1.0	1.0~1.4	1.8~2.5	1.8~2.5	B	0.5~0.8	0.8~1.5	0.8~1.7	0.8~1.7	C	0.6~0.8	0.9~1.2	1.2~1.6	1.8~2.5	Type	042	063	105	107	212	316	325	432	Size	L	0.4	0.6	1.0	1.6	2.0	3.2	4.5	W	0.2	0.3	0.5	0.8	1.25	1.6	2.5	A	0.15~0.25	0.20~0.30	0.45~0.55	0.8~1.0	0.8~1.2	1.8~2.5	1.8~2.5	2.5~3.5	B	0.10~0.20	0.20~0.30	0.40~0.50	0.6~0.8	0.8~1.2	1.0~1.5	1.0~1.5	1.5~1.8	C	0.15~0.30	0.25~0.40	0.45~0.55	0.6~0.8	0.9~1.6	1.2~2.0	1.8~3.2	2.3~3.5	Type	212 (4 circuits)	Size	L	2.0	W	1.25	a	0.5~0.6	b	0.5~0.6	c	0.2~0.3	d	0.5	Type	212 (2 circuits)	110 (2 circuits)	096 (2 circuits)	Size	L	2.0	1.37	0.9	W	1.25	1.0	0.6	a	0.5~0.6	0.35~0.45	0.25~0.35	b	0.5~0.6	0.55~0.65	0.15~0.25	c	0.5~0.6	0.3~0.4	0.15~0.25	d	1.0	0.64	0.45
Type	107	212	316	325																																																																																																																													
Size	L	1.6	2.0	3.2																																																																																																																													
	W	0.8	1.25	1.6	2.5																																																																																																																												
A	0.8~1.0	1.0~1.4	1.8~2.5	1.8~2.5																																																																																																																													
B	0.5~0.8	0.8~1.5	0.8~1.7	0.8~1.7																																																																																																																													
C	0.6~0.8	0.9~1.2	1.2~1.6	1.8~2.5																																																																																																																													
Type	042	063	105	107	212	316	325	432																																																																																																																									
Size	L	0.4	0.6	1.0	1.6	2.0	3.2	4.5																																																																																																																									
	W	0.2	0.3	0.5	0.8	1.25	1.6	2.5																																																																																																																									
A	0.15~0.25	0.20~0.30	0.45~0.55	0.8~1.0	0.8~1.2	1.8~2.5	1.8~2.5	2.5~3.5																																																																																																																									
B	0.10~0.20	0.20~0.30	0.40~0.50	0.6~0.8	0.8~1.2	1.0~1.5	1.0~1.5	1.5~1.8																																																																																																																									
C	0.15~0.30	0.25~0.40	0.45~0.55	0.6~0.8	0.9~1.6	1.2~2.0	1.8~3.2	2.3~3.5																																																																																																																									
Type	212 (4 circuits)																																																																																																																																
Size	L	2.0																																																																																																																															
	W	1.25																																																																																																																															
a	0.5~0.6																																																																																																																																
b	0.5~0.6																																																																																																																																
c	0.2~0.3																																																																																																																																
d	0.5																																																																																																																																
Type	212 (2 circuits)	110 (2 circuits)	096 (2 circuits)																																																																																																																														
Size	L	2.0	1.37	0.9																																																																																																																													
	W	1.25	1.0	0.6																																																																																																																													
a	0.5~0.6	0.35~0.45	0.25~0.35																																																																																																																														
b	0.5~0.6	0.55~0.65	0.15~0.25																																																																																																																														
c	0.5~0.6	0.3~0.4	0.15~0.25																																																																																																																														
d	1.0	0.64	0.45																																																																																																																														

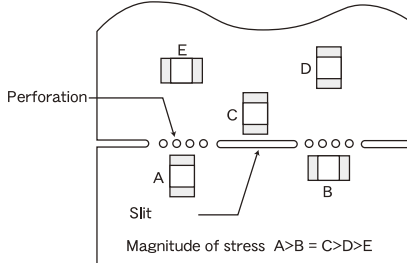




Precautions on the use of Multilayer Ceramic Capacitors

Stages	Precautions	Technical considerations																																														
2.PCB Design	Pattern configurations (Capacitor layout on panelized [breakaway] PC boards) 1. After capacitors have been mounted on the boards, chips can be subjected to mechanical stresses in subsequent manufacturing processes (PCB cutting, board inspection, mounting of additional parts, assembly into the chassis, wave soldering the reflow soldered boards etc.) For this reason, planning pattern configurations and the position of SMD capacitors should be carefully performed to minimize stress.	LWDC Recommended land dimensions for reflow-soldering  <table><tr><th>Type</th><th>105</th><th>107</th><th>212</th></tr><tr><td rowspan="2">SMD</td><td>L</td><td>0.52</td><td>0.8</td><td>1.25</td></tr><tr><td>W</td><td>1.0</td><td>1.6</td><td>2.0</td></tr><tr><td>A</td><td>0.18~0.22</td><td>0.25~0.3</td><td>0.5~0.7</td></tr><tr><td>B</td><td>0.2~0.25</td><td>0.3~0.4</td><td>0.4~0.5</td></tr><tr><td>C</td><td>0.9~1.1</td><td>1.5~1.7</td><td>1.9~2.1</td></tr></table> (unit: mm) (2) Examples of good and bad solder application <table><tr><th>Items</th><th>Not recommended</th><th>Recommended</th></tr><tr><td>Mixed mounting of SMD and leaded components</td><td></td><td></td></tr><tr><td>Component placement close to the chassis</td><td></td><td></td></tr><tr><td>Hand-soldering of leaded components near mounted components</td><td></td><td></td></tr><tr><td>Horizontal component placement</td><td></td><td></td></tr></table> 1-1. The following are examples of good and bad capacitor layout; SMD capacitors should be located to minimize any possible mechanical stresses from board warp or deflection. <table><tr><th></th><th>Not recommended</th><th>Recommended</th></tr><tr><td>Deflection of the board</td><td></td><td> Position the component at a right angle to the direction of the mechanical stresses that are anticipated.</td></tr></table> 1-2. To layout the capacitors for the breakaway PC board, it should be noted that the amount of mechanical stresses given will vary depending on capacitor layout. The example below shows recommendations for better design.  Magnitude of stress $A > B = C > D > E$ 1-3. When breaking PC boards along their perforations, the amount of mechanical stress on the capacitors can vary according to the method used. The following methods are listed in order from least stressful to most stressful: push-back, slit, V-grooving, and perforation. Thus, any ideal SMD capacitor layout must also consider the PCB splitting procedure.	Type	105	107	212	SMD	L	0.52	0.8	1.25	W	1.0	1.6	2.0	A	0.18~0.22	0.25~0.3	0.5~0.7	B	0.2~0.25	0.3~0.4	0.4~0.5	C	0.9~1.1	1.5~1.7	1.9~2.1	Items	Not recommended	Recommended	Mixed mounting of SMD and leaded components			Component placement close to the chassis			Hand-soldering of leaded components near mounted components			Horizontal component placement				Not recommended	Recommended	Deflection of the board		 Position the component at a right angle to the direction of the mechanical stresses that are anticipated.
Type	105	107	212																																													
SMD	L	0.52	0.8	1.25																																												
	W	1.0	1.6	2.0																																												
A	0.18~0.22	0.25~0.3	0.5~0.7																																													
B	0.2~0.25	0.3~0.4	0.4~0.5																																													
C	0.9~1.1	1.5~1.7	1.9~2.1																																													
Items	Not recommended	Recommended																																														
Mixed mounting of SMD and leaded components																																																
Component placement close to the chassis																																																
Hand-soldering of leaded components near mounted components																																																
Horizontal component placement																																																
	Not recommended	Recommended																																														
Deflection of the board		 Position the component at a right angle to the direction of the mechanical stresses that are anticipated.																																														



Precautions on the use of Multilayer Ceramic Capacitors

Stages	Precautions	Technical considerations
3.Considerations for auto-matic placement	Adjustment of mounting machine 1. Excessive impact load should not be imposed on the capacitors when mounting onto the PC boards. 2. The maintenance and inspection of the mounters should be conducted periodically. <	

Precautions on the use of Multilayer Ceramic Capacitors

Stages	Precautions	Technical considerations
4. Soldering	Selection of Flux 1. Since flux may have a significant effect on the performance of capacitors, it is necessary to verify the following conditions prior to use; (1) Flux used should be with less than or equal to 0.1 wt% (equivalent to choline) of halogenated content. Flux having a strong acidity content should not be applied. (2) When soldering capacitors on the board, the amount of flux applied should be controlled at the optimum level. (3) When using water-soluble flux, special care should be taken to properly clean the boards. Soldering Temperature, time, amount of solder, etc. are specified in accordance with the following recommended conditions. Sn-Zn solder paste can affect MLCC reliability performance. Please contact us prior to usage.	1-1. When too much halogenated substance (Chlorine, etc.) content is used to activate the flux, or highly acidic flux is used, an excessive amount of residue after soldering may lead to corrosion of the terminal electrodes or degradation of insulation resistance on the surface of the capacitors. 1-2. Flux is used to increase solderability in flow soldering, but if too much is applied, a large amount of flux gas may be emitted and may detrimentally affect solderability. To minimize the amount of flux applied, it is recommended to use a flux-bubbling system. 1-3. Since the residue of water-soluble flux is easily dissolved by water content in the air, the residue on the surface of capacitors in high humidity conditions may cause a degradation of insulation resistance and therefore affect the reliability of the components. The cleaning methods and the capability of the machines used should also be considered carefully when selecting water-soluble flux. 1-1. Preheating when soldering Heating: Ceramic chip components should be preheated to within 100 to 130°C of the soldering. Cooling: The temperature difference between the components and cleaning process should not be greater than 100°C. Ceramic chip capacitors are susceptible to thermal shock when exposed to rapid or concentrated heating or rapid cooling. Therefore, the soldering process must be conducted with great care so as to prevent malfunction of the components due to excessive thermal shock. Recommended conditions for soldering [Reflow soldering] Temperature profile   ※ Ceramic chip components should be preheated to within 100 to 130°C of the soldering. ※ Assured to be reflow soldering for 2 times. Caution 1. The ideal condition is to have solder mass (fillet) controlled to 1/2 to 1/3 of the thickness of the capacitor, as shown below:  2. Because excessive dwell times can detrimentally affect solderability, soldering duration should be kept as close to recommended times as possible. [Wave soldering] Temperature profile   ※ Ceramic chip components should be preheated to within 100 to 130°C of the soldering. ※ Assured to be wave soldering for 1 time. ※ Except for reflow soldering type. Caution 1. Make sure the capacitors are preheated sufficiently. 2. The temperature difference between the capacitor and melted solder should not be greater than 100 to 130°C 3. Cooling after soldering should be as gradual as possible. 4. Wave soldering must not be applied to the capacitors designated as for reflow soldering only.

Precautions on the use of Multilayer Ceramic Capacitors

Stages	Precautions	Technical considerations
4. Soldering		[Hand soldering] Temperature profile   (Pb free soldering) Temperature (°C) 400 300 200 100 0 350°C max 3 sec max Gradually cooling 60 sec min ※ $\Delta T \leq 190^\circ\text{C}$ (3216 type max), $\Delta T \leq 130^\circ\text{C}$ (3225 type min.) ※ It is recommended to use 20W soldering iron and the tip is 1φ or less. ※ The soldering iron should not directly touch the components. ※ Assured to be soldering iron for 1 time. Note: The above profiles are the maximum allowable soldering condition, therefore these profiles are not always recommended. Cautions 1. Use a 20W soldering iron with a maximum tip diameter of 1.0 mm. 2. The soldering iron should not directly touch the capacitor.
5. Cleaning	Cleaning conditions 1. When cleaning the PC board after the capacitors are all mounted, select the appropriate cleaning solution according to the type of flux used and purpose of the cleaning (e.g. to remove soldering flux or other materials from the production process.) 2. Cleaning conditions should be determined after verifying, through a test run, that the cleaning process does not affect the capacitor's characteristics.	1. The use of inappropriate solutions can cause foreign substances such as flux residue to adhere to the capacitor or deteriorate the capacitor's outer coating, resulting in a degradation of the capacitor's electrical properties (especially insulation resistance). 2. Inappropriate cleaning conditions (insufficient or excessive cleaning) may detrimentally affect the performance of the capacitors. (1) Excessive cleaning In the case of ultrasonic cleaning, too much power output can cause excessive vibration of the PC board which may lead to the cracking of the capacitor or the soldered portion, or decrease the terminal electrodes' strength. Thus the following conditions should be carefully checked; Ultrasonic output Below 20 W/ℓ Ultrasonic frequency Below 40 kHz Ultrasonic washing period 5 min. or less
6. Post cleaning processes	1. With some type of resins a decomposition gas or chemical reaction vapor may remain inside the resin during the hardening period or while left under normal storage conditions resulting in the deterioration of the capacitor's performance. 2. When a resin's hardening temperature is higher than the capacitor's operating temperature, the stresses generated by the excess heat may lead to capacitor damage or destruction. The use of such resins, molding materials etc. is not recommended.	
7. Handling	Breakaway PC boards (splitting along perforations) 1. When splitting the PC board after mounting capacitors and other components, care is required so as not to give any stresses of deflection or twisting to the board. 2. Board separation should not be done manually, but by using the appropriate devices. Mechanical considerations 1. Be careful not to subject the capacitors to excessive mechanical shocks. (1) If ceramic capacitors are dropped onto the floor or a hard surface, they should not be used. (2) When handling the mounted boards, be careful that the mounted components do not come in contact with or bump against other boards or components.	

Precautions on the use of Multilayer Ceramic Capacitors

Stages	Precautions	Technical considerations
8.Storage conditions	Storage 1. To maintain the solderability of terminal electrodes and to keep the packaging material in good condition, care must be taken to control temperature and humidity in the storage area. Humidity should especially be kept as low as possible. - Recommended conditions - Ambient temperature Below 30°C - Humidity Below 70% RH The ambient temperature must be kept below 40°C. Even under ideal storage conditions capacitor electrode solderability decreases as time passes, so should be used within 6 months from the time of delivery. - Ceramic chip capacitors should be kept where no chlorine or sulfur exists in the air. 2. The capacitance value of high dielectric constant capacitors (type 2 & 3) will gradually decrease with the passage of time, so this should be taken into consideration in the circuit design. If such a capacitance reduction occurs, a heat treatment of 150°C for 1 hour will return the capacitance to its initial level.	1. If the parts are stored in a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/package materials may take place. For this reason, components should be used within 6 months from the time of delivery. If exceeding the above period, please check solderability before using the capacitors.