

Cree® LED Module LMR4 with TrueWhite® Technology

A fast, proven way to realize the promise of LED Lighting

Data Sheet

Cree LED Modules provide a simple solution for lighting designers and manufacturers to adopt best in class LED lighting from Cree. The LMR series continues Cree's history of innovation in LEDs for lighting applications and provides a comprehensive solution including Cree's patented TrueWhite Technology to achieve an industry-leading combination of light quality and efficacy. This versatile LED lighting module allows design flexibility with the beautiful color and efficacy of Cree TrueWhite technology.

The Cree LED Module LMR4 with TrueWhite Technology is the ideal choice for lighting applications where high CRI and efficacy are required, such as restaurants, retail and hospitality lighting. The compact module form factor is a benefit to lighting manufacturers seeking a simple solution to adopt LED lighting or cost-effectively expand their existing LED-lighting product portfolio.

FEATURES

- Cree TrueWhite technology
- Comprehensive solution with driver electronics, optics and core thermals
- 700 lm @ 2700, 3000, 3500, 4000 K CCT
- Supports dimming to 5% of rated light output
- Designed to last at least 35,000 hours at L70
- Versatile form factor
- Cree IES LM-80 data in support of U. S. DOE ENERGY STAR® qualification
- The LMR4 (120 V) is UL-recognized and California Title 24-compliant, and the LMR4 (230 V) complies with multiple international standards

Cree TrueWhite technology:

- A better way to generate white light that utilizes a patented mixture of unsaturated yellow and saturated red LEDs.
- Proprietary optical system utilizes a unique combination of reflective and refractive optical components to achieve a uniform, comfortable appearance. Pixelation and direct view of LEDs is eliminated.
- Technology benefit - high CRI and efficacy allows customers to avoid having to make tradeoffs between energy efficiency and light quality as compared to other lighting alternatives.
- Marketing benefit - Cree logo on lens enables brand marketing value on final design.



Characteristics

The following table provides several base order codes for the Cree LED module LMR4, as well as a description of the order-code nomenclature.

CCT*	Nominal Luminous Flux (lm)	CRI	Input Power	Input Voltage/Freq	Power Factor	Order Code
4000	700	90	12 W	120 V/60 Hz	>.80	LMR040-0700-40F9-10100TW
4000	700	90	12 W	230 V/50 Hz	>.90	LMR040-0700-40F9-20100TW
3500	700	90	12 W	120 V/60 Hz	>.80	LMR040-0700-35F9-10100TW
3500	700	90	12 W	230 V/50 Hz	>.90	LMR040-0700-35F9-20100TW
3000	700	90	12 W	120 V/60 Hz	>.80	LMR040-0700-30F9-10100TW
3000	700	90	12 W	230 V/50 Hz	>.90	LMR040-0700-30F9-20100TW
2700	700	90	12 W	120 V/60 Hz	>.80	LMR040-0700-27F9-10100TW
2700	700	90	12 W	230 V/50 Hz	>.90	LMR040-0700-27F9-20100TW

* Refer to section below on chromaticity for more details

Note: Cree maintains a tolerance of +/- 7% on flux and power measurements

Thermal Management Guidelines

Acceptable ambient starting and operating temperatures of the Cree LED Module LMR4 are between 0° C and 50° C. The lifetime and performance estimates described in this document require the T_c limit stated in this Thermal Management Guidelines section are adhered to and only the modifications described in this document are implemented.

The LED module is flexible; use of the optional heat sink depends on the thermal path options available in your design requirements. Secondary optics added to the module will reduce the light output and could also alter the color characteristics of the final luminaire design.

The Cree LED module LMR4 is designed to perform in a variety of environments; however, the LED module lifetime is highly dependent upon the T_c temperature. To achieve lifetime and performance estimates, and maintain the warranty, the final design cannot exceed 70° C at thermal equilibrium, based on the thermocouple (T_c) location shown in the Form Factor section above and tested in situ.




Form Factor

The Cree LED module LMR4 is constructed with a durable machined aluminum housing and comes complete with an integrated thermal management system. This system conducts heat away from LEDs and transfers it to the mounting plate junction, providing luminaire designers with the flexibility to further optimize their thermal design.


Form factor and measurements are shown below and additional details are also available by downloading the STEP file from www.cree.com/modules. The standard product configuration consists of the module with the mounting plate attached. A custom fit heat sink is also available and can be ordered separately (part number LMR040-HS00-0000-0000001).

The weight of the module with mounting plate is approximately 250 grams and 150 grams for the heat sink.

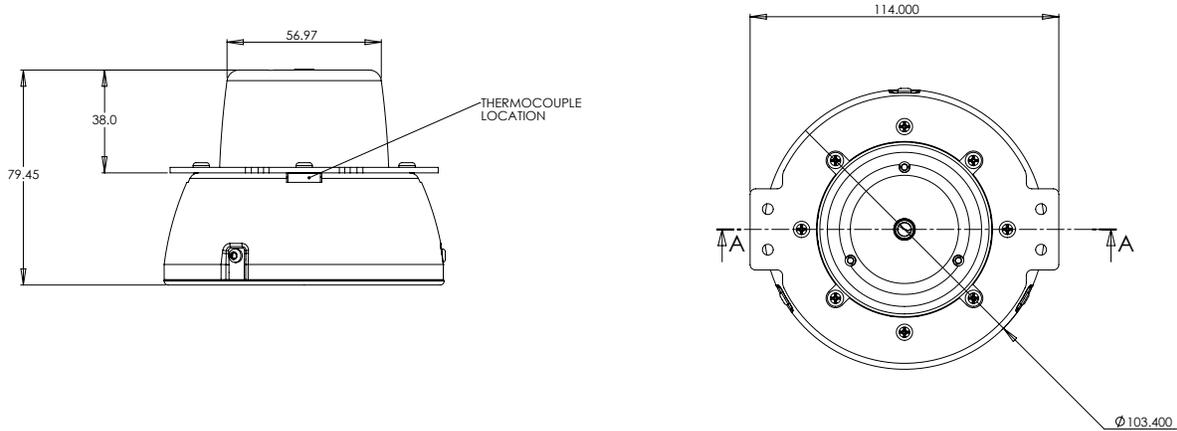

Photometry

The following photometry results are based on independent testing.

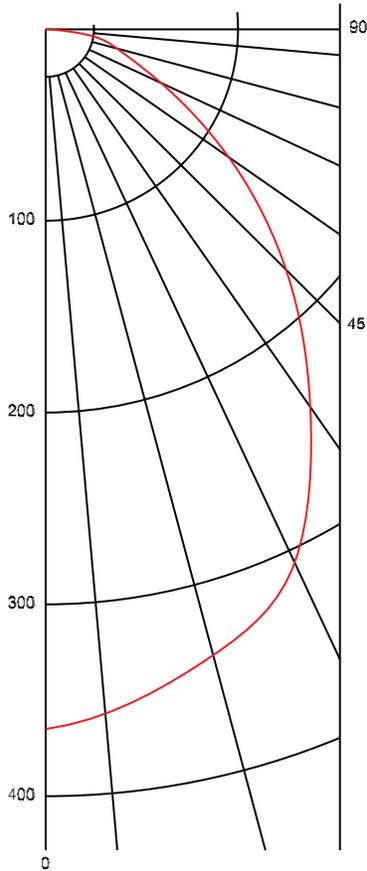

Intensity Candlepower Summary

Angle	Mean CP
0	365
5	362
15	340
25	300
35	245
45	184
55	124
65	71
75	37
85	27
90	0

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-30	242	-	35%
0-40	381	-	55%
0-60	607	-	87%
0-90	700	-	100%



Chromaticity

The Cree LED Module LMR4 provides high color consistency around the specified color temperature. Individual LEDs are tested and matched in order to meet the designed chromaticity specification within a 4-step MacAdam ellipse centered around the Black Body line at each color temperature (2700 K, 3000 K, 3500 K, 4000 K CCT).

Color Temp Code	CCT	x	y
40F	4000 K	0.372191	0.373914
		0.382239	0.370582
		0.391542	0.385686
		0.381333	0.389239
35F	3500 K	0.397411	0.385754
		0.407367	0.382271
		0.417418	0.397872
		0.407308	0.401588
30F	3000 K	0.423550	0.396850
		0.433384	0.393224
		0.444206	0.409286
		0.434226	0.413155
27F	2700 K	0.447255	0.403738
		0.456921	0.400031
		0.468390	0.416346
		0.458587	0.420302

Order Codes

