

LOWBAY SLIM LED LOW BAY LIGHTING



- IP20 main voltage LED ceiling light
- 0.6mm sheet steel powder coated white
- Alanoid high reflective aluminium
- Instant start with no flickering
- 10~100 Occupancy Function Option
- High efficiency LED chip and reflector system
- Energy savings of 85% & low maintenance costs
- Long life - average 30k hours
- PC transparent diffuser

120W ~ 6400-9600lm




LOWBAY Specification

Model Number	LOWBAY 8050K	LOWBAY 1250K
Fitting Colour	White	White
Input Voltage	220-240V	220-240V
Power Consumption	77W	120W
Lumens	6400lm	9600lm
Colour (K)	5000	5000
Lumen Field Angle	95°	95°
Working Temperature	-20°C ~ +35°C	
CRI	80	80
Weight	4000g	4200g
Dimensions	750 x 330 x 90mm	

Optional
Emergency
pack available
~ EP3

Mechanical Diagrams

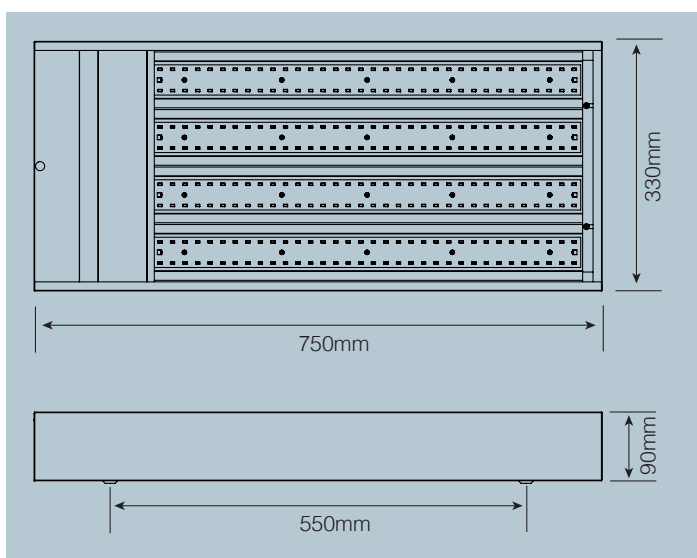

Photometrics

