

FEATURES

- * 0.52 inch (13.2 mm) DIGIT HEIGHT.
- * CONTINUOUS UNIFORM SEGMENTS.
- * LOW POWER REQUIREMENT.
- * EXCELLENT CHARACTERS APPEARANCE.
- * HIGH BRIGHTNESS & HIGH CONTRAST.
- * WIDE VIEWING ANGLE.
- * SOLID STATE RELIABILITY.
- * CATEGORIZED FOR LUMINOUS INTENSITY.
- * **LEAD-FREE PACKAGE (ACCORDING TO ROHS).**


DESCRIPTION

The LTC-5336E is a 0.52 inch (13.2 mm) digit height triple digit seven-segment display. This device utilizes red orange LED chips, which are made from GaAsP on a transparent GaP substrate, and has a gray face and white segments.

DEVICE


PART NO.	DESCRIPTION
Red Orange	Common Cathode Rt. Hand Decimal
LTC-5336E	

PACKAGE DIMENSIONS

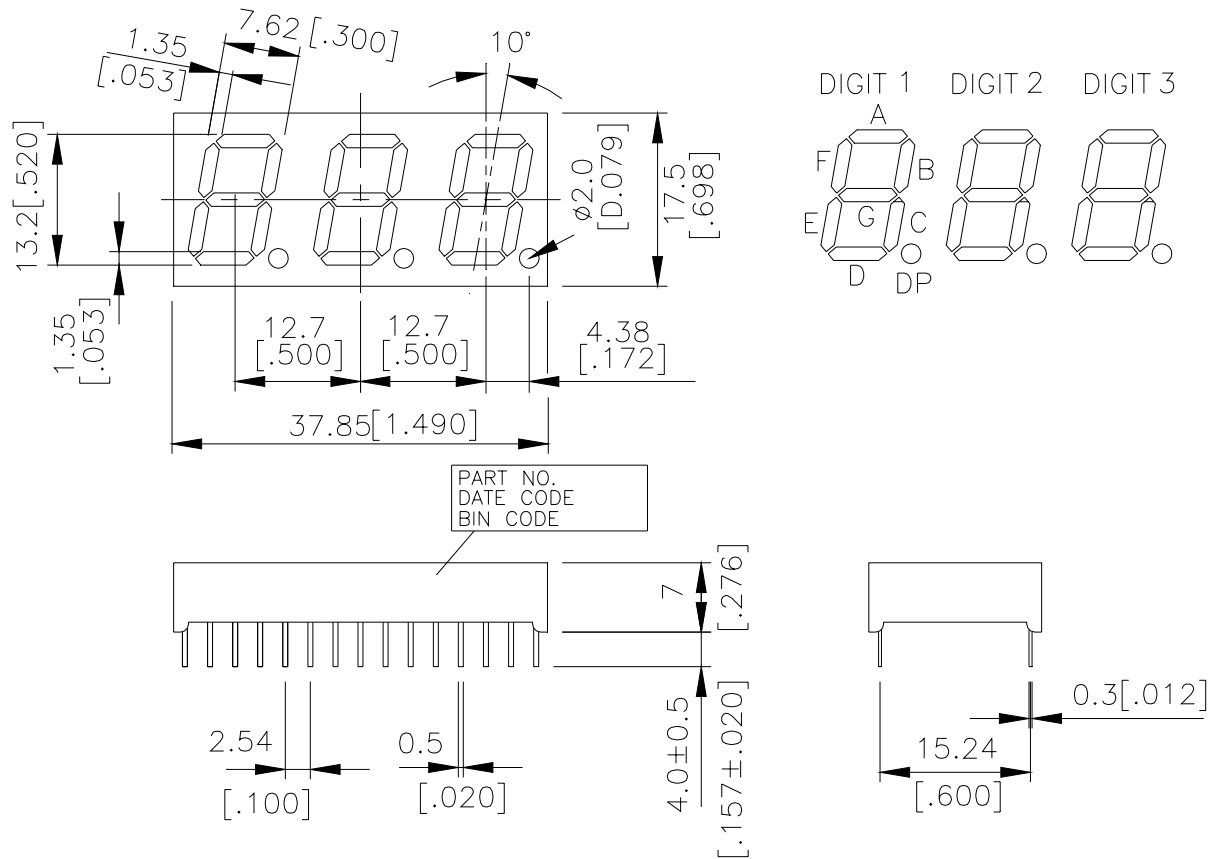

NOTES: 1.All dimensions are in millimeters. Tolerances are ± 0.25 mm (0.01") unless otherwise noted.
2.Pin tip's shift tolerance is ± 0.4 mm.

INTERNAL CIRCUIT DIAGRAM

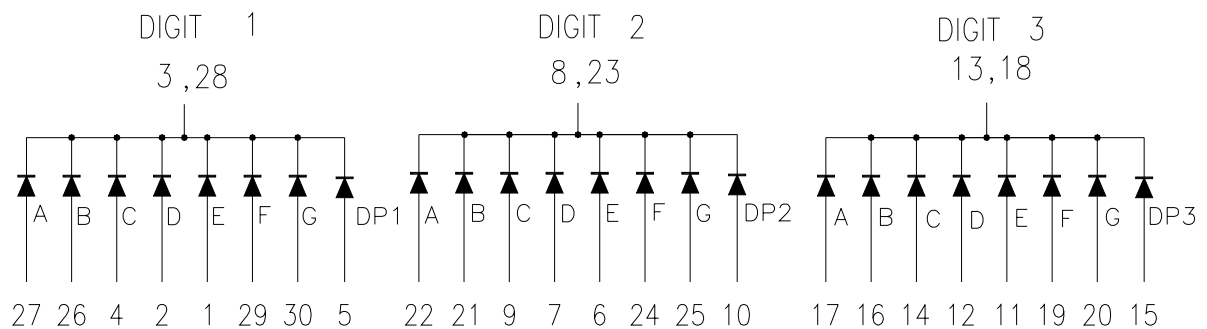

PIN CONNECTION

NO.	CONNECTION	NO.	CONNECTION
1	ANODE E (DIGIT 1)	16	ANODE B (DIGIT 3)
2	ANODE D (DIGIT 1)	17	ANODE A (DIGIT 3)
3	COMMON CATHODE (DIGIT 1)	18	COMMON CATHODE (DIGIT 3)
4	ANODE C (DIGIT 1)	19	ANODE F (DIGIT 3)
5	ANODE D.P. (DIGIT 1)	20	ANODE G (DIGIT 3)
6	ANODE E (DIGIT 2)	21	ANODE B (DIGIT 2)
7	ANODE D (DIGIT 2)	22	ANODE A (DIGIT 2)
8	COMMON CATHODE (DIGIT 2)	23	COMMON CATHODE (DIGIT 2)
9	ANODE C (DIGIT 2)	24	ANODE F (DIGIT 2)
10	ANODE D.P. (DIGIT 2)	25	ANODE G (DIGIT 2)
11	ANODE E (DIGIT 3)	26	ANODE B (DIGIT 1)
12	ANODE D (DIGIT 3)	27	ANODE A (DIGIT 1)
13	COMMON CATHODE (DIGIT 3)	28	COMMON CATHODE (DIGIT 1)
14	ANODE C (DIGIT 3)	29	ANODE F (DIGIT 1)
15	ANODE D.P.(DIGIT 3)	30	ANODE G (DIGIT 1)

ABSOLUTE MAXIMUM RATING AT Ta=25°C

PARAMETER	MAXIMUM RATING	UNIT
Power Dissipation Per Segment	75	mW
Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA
Continuous Forward Current Per Segment	25	mA
Derating Linear From 25°C Per Segment	0.33	mA/°C
Reverse Voltage Per Segment	5	V
Operating Temperature Range	-35°C to +105°C	
Storage Temperature Range	-35°C to +105°C	
Solder Conditions: 1/16 inch below seating plane for 3 seconds at 260°C., or temperature of unit (during assembly) not over max. temperature rating above		







ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I _V	800	2200		μcd	I _F =10mA
Peak Emission Wavelength	λ _p		630		nm	I _F =20mA
Spectral Line Half-Width	Δλ		40		nm	I _F =20mA
Dominant Wavelength	λ _d		621		nm	I _F =20mA
Forward Voltage Per Segment	V _F		2.0	2.6	V	I _F =20mA
Reverse Current Per Segment	I _R			100	μA	V _R =5V
Luminous Intensity Matching Ratio (Similar Light Area)	I _V -m			2:1		I _F =10mA

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

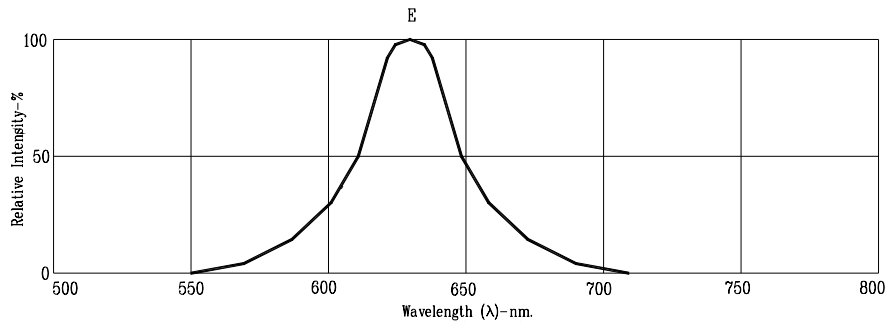

NOTE: E=RED ORANGE