

#### 1. Features

- Low EMI noise and small footprint (5mm²) using inductor-embedded ferrite substrate
- High efficiency using synchronous rectifier technology at 3MHz operation
- PFM/PWM automatic mode switching function
- Smooth mode transition between PFM mode and PWM mode with low-ripple-voltage PFM mode
- 2% DC voltage accuracy over full load current range
- Wide input voltage range: 2.3~5.5V
- Maximum Load Current: 600mA (depends on output voltage)
- Fixed output voltage: 0.8V 4V (factory setting, 50mV step)
- Internal soft start, overcurrent protection



### 2. Description


The LXDC2HL series is a low power step-down DC-DC converter suitable for space-limited or noise-sensitive applications. The device utilizes an inductor-embedded ferrite substrate that reduces radiated EMI noise and conduction noise.

By adding input/output capacitors, it can be used as an LDO replacement. Its low noise and easy-to-assemble features assure reliable power supply quality.

The device works in PFM mode at light load for extended battery life. At heavy load, it changes to PMW mode automatically and maintains high efficiency using synchronous rectifying technology.

The device provides good output voltage accuracy even in PFM mode. It maintains 2% DC voltage accuracy over the full current range (0-600mA), and shows very smooth mode transition between PFM mode and PWM mode.

### 3. Typical Application Circuit

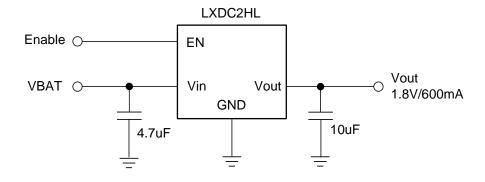





### 4. Mechanical details


### 4-1 Outline







Side View



Unit: mm


Mark	Dimension
L	2.5 +/- 0.2
W	2.0 +/- 0.2
Т	1.1 MAX
а	0.85 +/- 0.1
b	0.60 +/- 0.1
С	0.15 +/- 0.15

### 4-2. Pin Function

Pin	Symbol	I/O	Description
1	Vin	Input	Vin pin supplies current to the LXDC2HL internal regulator.
2	EN	Input	This is the ON/OFF control pin of the device. Connecting this pin to GND keeps the device in shutdown mode. Pulling this pin to Vin enables the device with soft start. This pin must not be left floating and must be terminated. If this pin is left open, the device may be off around 100mA output. EN=H: Device ON, EN=L: Device OFF
3	Vout	Output	Regulated voltage output pin. Apply output load between this pin and GND.
4	GND	-	Ground pin



## 4-3. Functional Block Diagram

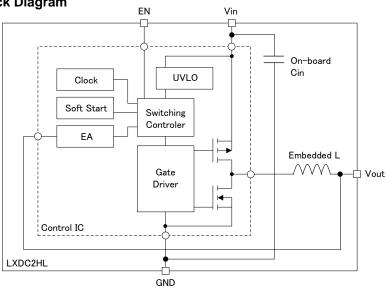

### 5. Ordering Information

Part number	Output Voltage	Device Specific Feature	MOQ
LXDC2HL10A-080	1.0V	Standard Type	T/R, 3000pcs/R
LXDC2HL11A-314	1.1V	Standard Type	T/R, 3000pcs/R
LXDC2HL12A-050	1.2V	Standard Type	T/R, 3000pcs/R
LXDC2HL1CA-322	1.25V	Standard Type	T/R, 3000pcs/R
LXDC2HL13A-082	1.3V	Standard Type	T/R, 3000pcs/R
LXDC2HL1DA-087	1.35V	Standard Type	T/R, 3000pcs/R
LXDC2HL15A-051	1.5V	Standard Type	T/R, 3000pcs/R
LXDC2HL18A-052	1.8V	Standard Type	T/R, 3000pcs/R
LXDC2HL23A-323	2.3V	Standard Type	T/R, 3000pcs/R
LXDC2HL25A-053	2.5V	Standard Type	T/R, 3000pcs/R
LXDC2HL28A-243	2.8V	Standard Type	T/R, 3000pcs/R
LXDC2HL30A-054	3.0V	Standard Type	T/R, 3000pcs/R
LXDC2HL33A-055	3.3V	Standard Type	T/R, 3000pcs/R

<sup>#</sup> Output voltage can be set 50mV step from 0.8V to 4.0V. Please ask Murata representative.



## 6. Electrical Specification

### 6-1 Absolute maximum ratings

Parameter	Symbol	rating	Unit
Input voltage	Vin, EN	6.3	V
Operating ambient temperature	Ta	-40 to +85	°C
Operating IC temperature	T <sub>IC</sub>	-40 to +125	°C
Storage temperature	T <sub>STO</sub>	-40 to +85	°C

## 6-2 Electrical characteristics (Ta=25°C)

Parameter	Symbol	С	ondition	Min.	Тур.	Max.	Unit
Input voltage	$V_{in}$			2.3	3.6	5.5	V
UVLO voltage	UVLO			1.0	1.4	1.8	V
			LXDC2HL10A-080				
			LXDC2HL11A-314				
			LXDC2HL12A-050				
			LXDC2HL1CA-322				
		Vin=3.6V,	LXDC2HL13A-082				
		EN=0V	LXDC2HL1DA-087				
Input leak current	lin-off		LXDC2HL15A-051		0	2	uA
			LXDC2HL18A-052				
			LXDC2HL23A-323				
			LXDC2HL25A-053				
		Vin=5.0V, EN=0V	LXDC2HL28A-243				
			LXDC2HL30A-054				
			LXDC2HL33A-055				
			LXDC2HL10A-080	0.976	1.0	1.024	
			LXDC2HL11A-314	1.076	1.1	1.124	
			LXDC2HL12A-050	1.176	1.20	1.224	
			LXDC2HL1CA-322	1.225	1.25	1.275	
		Vin-Vout>1V	LXDC2HL13A-082	1.274	1.30	1.326	
0 (a ( a)(a a		VIII-VOUI>1V	LXDC2HL1DA-087	1.323	1.35	1.377	
Output voltage accuracy	Vout		LXDC2HL15A-051	1.47	1.50	1.53	V
			LXDC2HL18A-052	1.764	1.80	1.836	
			LXDC2HL23A-323	2.254	2.30	2.346	
			LXDC2HL25A-053	2.45	2.50	2.55	
		Vin-Vout>0.7V	LXDC2HL28A-243	2.744	2.80	2.856	
		viii-vout>0.7 V	LXDC2HL30A-054	2.94	3.00	3.06	
		Vin-Vout>0.5V	LXDC2HL33A-055	3.234	3.30	3.366	



Parameter	Symbol	(	Condition	Min.	Тур.	Max.	Unit
		LXDC2HL10A-					
	LXDC2HL11A-314						
		LXDC2HL12A-					
		LXDC2HL1CA	-322	0		600	
		LXDC2HL13A-	082			000	
		LXDC2HL1DA	-087				
Load current range	lout	LXDC2HL15A-	051				mA
		LXDC2HL18A-	052				
		LXDC2HL23A-	323	0		500	
		LXDC2HL25A-053		U		500	
		LXDC2HL28A-	243	0		450	
		LXDC2HL30A-054		0		400	
		LXDC2HL33A-	055	0		300	
			LXDC2HL10A-080				
			LXDC2HL11A-314				
			LXDC2HL12A-050				
			LXDC2HL1CA-322				
		Vin=3.6V, lout=300mA,	LXDC2HL13A-082				
		BW=100MHz	LXDC2HL1DA-087				
Ripple voltage	Vrpl		LXDC2HL15A-051		15		mV
			LXDC2HL18A-052				
			LXDC2HL23A-323				
			LXDC2HL25A-053				
		Vin=5V,	LXDC2HL28A-243				
		lout=300mA,	LXDC2HL30A-054				
		BW=100MHz	LXDC2HL33A-055	1			



Parameter	Symbol	C	Condition	Min.	Тур.	Max.	Unit
			LXDC2HL10A-080		78		
			LXDC2HL11A-314		79		
			LXDC2HL12A-050		80		
			LXDC2HL1CA-322		81		
		Vin=3.6V,	LXDC2HL13A-082		81		
		lout=150mA	LXDC2HL1DA-087		82		
Efficiency	EFF		LXDC2HL15A-051		83		%
			LXDC2HL18A-052		85		
			LXDC2HL23A-323		87		
			LXDC2HL25A-053		88		
		Vin=5V,	LXDC2HL28A-243		86		
		Iout=150mA	LXDC2HL30A-054		87		
			LXDC2HL33A-055		88		
ENI control coltano	VENH	ON ; Enable		1.4		Vin	V
EN control voltage	VENL	OFF ; Disable		0		0.25	V
SW Frequency	Fosc			2.5	3.0	3.5	MHz
		LXDC2HL10A-080				1200	
		LXDC2HL11A-314					
		LXDC2HL12A-050		600			
		LXDC2HL1CA-322			900		
		LXDC2HL13A-	LXDC2HL13A-082				
		LXDC2HL1DA	-087				mA
		LXDC2HL15A-	051				
	000	LXDC2HL18A-	052				
Over current	OCP	LXDC2HL23A-	323	500	000	4000	
protection		LXDC2HL25A-	053	500	900	1200	
		LXDC2HL28A-	243	500	900	1200	
		LXDC2HL30A-	054	400	700	1200	
		LXDC2HL33A-	055	300	700	1200	
		If the over current event continues les If the over current event continues mo Restart by toggling EN voltage or Vin		re than TI		•	1
	Tlatch	Latch-up mask @Vout=0.8×V			20		usec
Start-up time	Ton				0.9		msec


<sup>(\*1)</sup> External capacitors (Cin: 4.7uF, Cout: 10uF) should be placed near the module for proper operation.


<sup>(\*2)</sup> The above characteristics are tested using the test circuit in section 8.



### 6-3 Thermal and Current De-rating Information

The following figures show the power dissipation and temperature rise characteristics. These data are measured on Murata's evaluation board of this device at no air-flow condition.






The output current of the device may need to be de-rated if it is operated in a high ambient temperature or in a continuous power delivering application. The amount of current de-rating is highly dependent on the environmental thermal conditions, i.e. PCB design, nearby components or effective air flows. Care should especially be taken in applications where the device temperature exceeds 85°C.

The IC temperature of the device must be kept lower than the maximum rating of  $125\,^{\circ}$ C. It is generally recommended to take an appropriate de-rating to IC temperature for a reliable operation. A general de-rating for the temperature of semiconductor is 80%.

MLCC capacitor's reliability and the lifetime is also dependant on temperature and applied voltage stress. Higher temperature and/or higher voltage cause shorter lifetime of MLCC, and the degradation can be described by the Arrhenius model. The most critical parameter of the degradation is IR (Insulation Resistance). The below figure shows MLCC's B1 life based on a failure rate reaching 1%. It should be noted that wear-out mechanisms in MLCC capacitor is not reversible but cumulative over time.



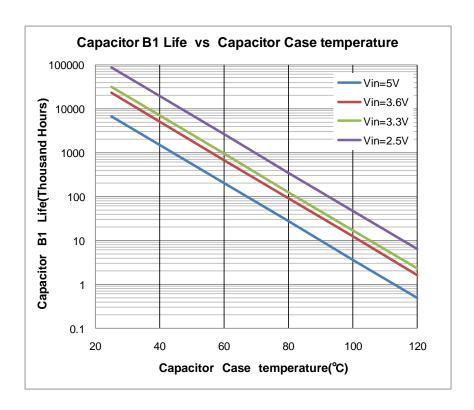

The following steps should be taken before the design fix of user's set for reliable operation.

- 1. The ambient temperature of the device should be kept below 85 °C
- 2. The IC temperature should be measured on the worst condition of each application. The temperature must be kept below 125 °C. An appropriate de-rating of temperature and/or output current should be taken.
- 3. The MLCC temperature should be measured on the worst condition of each application. Considering the above figure, it should be checked if the expected B1 life of MLCC is acceptable or not.



### 7. Detailed Description


#### PFM/PWM Mode

If the load current decreases, the converter will enter PFM mode automatically. In PFM mode, the device operates in discontinuous current mode with a sporadic switching pulse to keep high efficiency at light load.

The device uses constant on-time control in PFM operation, which produces a low ripple voltage and accurate output voltage compared with other PFM architectures. Because of the architecture, DC output voltage can be kept within +/-2% range of the nominal voltage and the output ripple voltage in PFM mode can be reduced by just increasing the output capacitor.

The transition between PFM and PWM is also seamless and smooth.

The transition current between PFM and PWM is dependent on Vin, Vout and other factors, but the approximate threshold is about 100-200mA.



### **UVLO (Under Voltage Lock Out)**

The input voltage (Vin) must reach or exceed the UVLO voltage (1.4Vtyp) before the device begins the start up sequence even when the EN pin is kept high. The UVLO function protects against unstable operation at low Vin levels.

#### **Soft Start**

The device has an internal soft-start function that limits the inrush current during start-up. The soft-start system progressively increases the switching on-time from a minimum pulse-width to that of normal operation. Because of this function, the output voltage increases gradually from zero to nominal voltage at start-up event. The nominal soft-start time is 0.9msec. If you prefer a faster soft-start time, please contact a Murata representative.

#### **Enable**

The device starts operation when EN is set high and starts up with soft start. For proper operation, the EN pin must be terminated to logic high and must not be left floating. If the pin is left open, the device may operate at light load but will not work at heavy load.

Pulling the EN pin to logic low forces the device into shutdown. The device does not have a discharge function when it turns off. If you prefer a discharge function, please contact a Murata representative.

#### 100% Duty Cycle Operation

The device can operate in 100% duty cycle mode, in which the high-side switch is constantly turned ON, thereby providing a low input-to-output voltage difference.

When Vin and Vout become close and the duty cycle approaches 100%, the switching pulse will skip the nominal switching period and the output voltage ripple may be larger than other conditions. It should be noted that this condition does not mean a failure of the device.


### **Over Current Protection**

When the output current reaches the OCP threshold, the device narrows the switching duty and decreases the output voltage. If the OCP event is removed within the mask time (20usec typ), the output voltage recovers to the nominal value automatically. If the OCP event continues over the mask time, the device will shutdown.

After it is shut down, it can be restarted by toggling the Vin or EN voltage.



### 8. Test Circuit

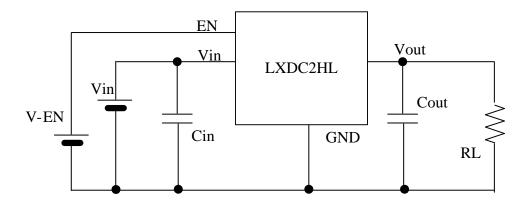


Cin : 4.7uF/6.3V (GRM188B30J475K) Cout : 10uF/6.3V (GRM188B30J106M)



#### 9. Measurement Data

## Micro DC-DC Converter evaluation board (P2LX0244)

### **Measurement setup**

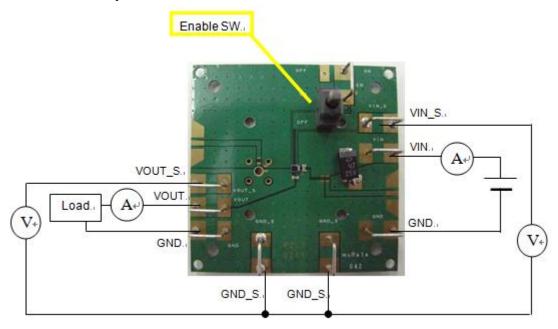

The enable switch has three positions.

- 1. When it is toggled to "ON" side, the device starts operation.
- 2. When it is toggled to "OFF" side, the device stops operation and remains in shut down status.
- 3. When it is set to middle of "ON" and "OFF", the EN pin floats and an external voltage can be applied to the EN terminal pin on the EVB. If you don't apply an external voltage to EN pin, the enable switch should not to be set to the middle position.


%The 47uF capacitor is for the evaluation kit only, and has been added to compensate for the long test cables.




## Typical Measurement Data (reference purpose only) (Ta=25℃)

### **Efficiency**


Vin=3.6V, Vout=1.0V




Vin=3.6V, Vout=1.2V




· Vin=3.6V, Vout=1. 3V




Vin=3.6V, Vout=1.35V



Vin=3.6V, Vout=1.5V




Vin=3.6V, Vout=1.8V






## · Vin=5.0V, Vout=2.5V



### · Vin=5.0V, Vout=3.0V



### · Vin=5.0V, Vout=3.3V







# Typical Measurement Data (reference purpose only) (Ta=25℃)

### **Load Regulation**


· Vin=3.6V, Vout=1.0V




Vin=3.6V, Vout=1.2V




· Vin=3.6V, Vout=1.3V




· Vin=3.6V, Vout=1.35V



Vin=3.6V, Vout=1.5V




Vin=3.6V, Vout=1.8V







### · Vin=5.0V, Vout=2.5V

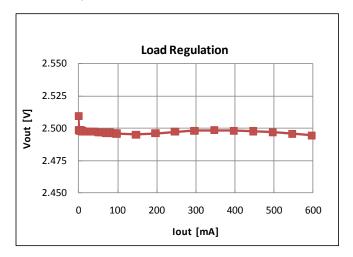

### · Vin=5.0V, Vout=3.0V

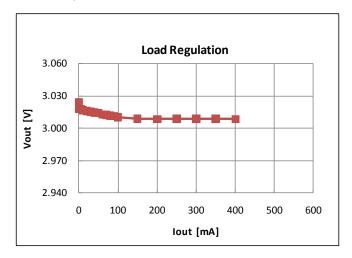

### · Vin=5.0V, Vout=3.3V







## **Typical Measurement Data (reference purpose only)**

### **Output Ripple-Noise**


· Vin=3.6V, Vout=1.0V, BW: 150MHz




Vin=3.6V, Vout=1.2V, BW: 150MHz




· Vin=3.6V, Vout=1. 3V, BW: 150MHz




Vin=3.6V, Vout=1.35V, BW: 150MHz



· Vin=3.6V, Vout=1.5V, BW: 150MHz




Vin=3.6V, Vout=1.8V, BW: 150MHz







Vin=5.0V, Vout=2.5V, BW: 150MHz



• Vin=5.0V, Vout=3. 0V, BW: 150MHz



Vin=5.0V, Vout=3.3V, BW: 150MHz







## Typical Measurement Data (reference purpose only) (Ta=25℃)

### **Load Transient Response**

· Vin=3.6V, Vout=1.0V

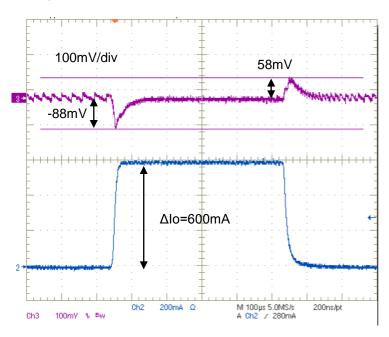


· Vin=3.6V, Vout=1.2V

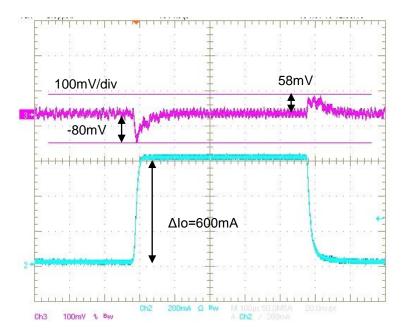




### · Vin=3.6V, Vout=1.35V

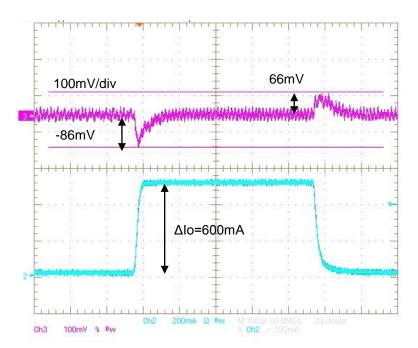


### · Vin=3.6V, Vout=1.5V

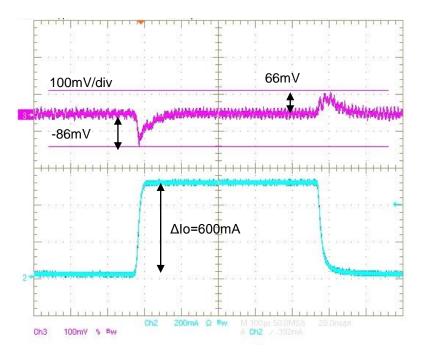




### · Vin=3.6V, Vout=1.8V

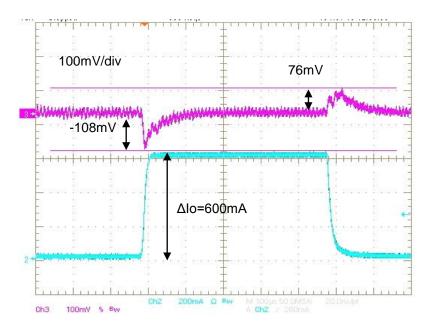


### · Vin=3.6V, Vout=2.5V

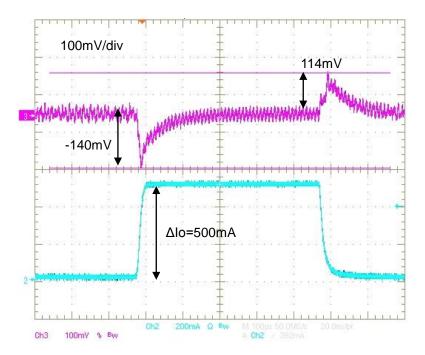




### · Vin=5.0V, Vout=3.0V

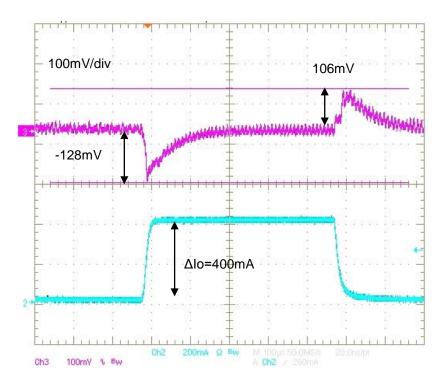

### Vin=5.0V, Vout=3.3V

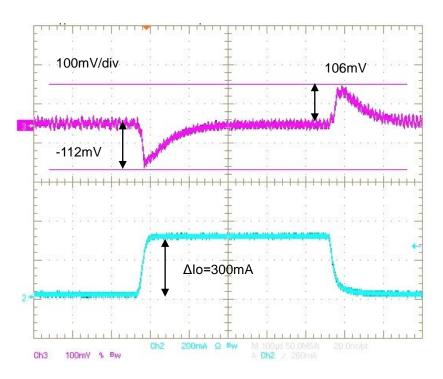



## 10.Reliability Tests


No.	Ite	ms	Specifications	Test Methods	QTY	Result (NG)
1	Vibration Resistance		Appearance : No severe damages	Solder specimens on the testing jig (glass fluorine boards) shown in appended Fig.1 by a Pb free solder. The soldering shall be done either by iron or reflow and be conducted with care so that the soldering is uniform and free of defect such as by heat shock.  Frequency: 10~2000 Hz Acceleration: 196 m/s² Direction: X,Y,Z 3 axis	18	G (0)
				Period : 2 h on each direction Total 6 h.		
2	Deflection			Solder specimens on the testing jig (glass epoxy boards) shown in appended Fig.2 by a Pb free solder. The soldering shall be done either by iron or reflow and be conducted with care so that the soldering is uniform and free of defect such as by heat shock.  Deflection: 1.6mm	18	G (0)
3	Soldering streng (Push Strength)	th	9.8 N Minimum	Solder specimens onto test jig shown below. Apply pushing force at 0.5mm/s until electrode pads are peeled off or ceramics are broken. Pushing force is applied to longitudinal direction.  Pushing Direction  Specimen  Jig	18	G (0)
4	Solderability of Termination		75% of the terminations is to be soldered evenly and continuously.	Immerse specimens first an ethanol solution of rosin, then in a Pb free solder solution for 3±0.5 sec. at 245±5 °C.  Preheat : 150 °C, 60 sec.  Solder Paste : Sn-3.0Ag-0.5Cu  Flux : Solution of ethanol and rosin (25 % rosin in weight proportion)	18	G (0)
5	Resistance to Soldering Heat (Reflow)	Appearance Electrical specifications	No severe damages Satisfy specifications listed in paragraph 6-2.	Preheat Temperature : 150-180 °C Preheat Period : 90+/-30 sec. High Temperature : 220 °C High Temp. Period : 20sec. Peak Temperature : 260+5/-0 °C Specimens are soldered twice with the above condition, and then kept in room condition for 24 h before measurements.	18	G (0)



No.	Items		Specifications	Test Met	thods		QTY	Result (NG)
6	High Temp. Exposure		Temperature:85±2 °C Period:1000+48/-0 h Room Condition:2~24h			18	G (0)	
7	Temperature Cycle			Conditio table	n:100 cycles	in the following	3	
				Step	Temp(°C)	Time(min)		
				1	Min. Operating Temp.+0/-3	30±3	18	G (0)
		Appearance	No severe damages	2	Max. Operating Temp.+3/-0	30±3		
8	Humidity (Steady State)	Electrical specifications	Satisfy specifications listed in paragraph 6-2.	Temperature:85±2 °C Humidity:80~90%RH Period:1000+48/-0 h Room Condition:2~24h			18	G (0)
9	Low Temp. Exposure			Temperature:-40±2 °C Period:1000+48/-0 h Room Condition:2~24h		18	G (0)	
10	ESD(Machine Model)			C:200pF、R:0Ω TEST Voltage :+/-100V Number of electric discharges:1		5	G (0)	
11	ESD(Human Body Model)			C:100pF、R:1500Ω TEST Voltage :+/-1000V Number of electric discharges:1		5	G (0)	



Fig.1
<u>Land Pattern</u>




Unit:mm

Symbol	Dimensions
а	0.85
b	0.60
С	0.5
d	0.2

·Reference purpose only.




Fig.2
Testing board

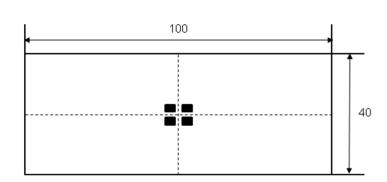

Unit:mm

■: Land pattern is same as figure1 Glass-fluorine board t=1.6mm Copper thickness over 35 µm


## **Mounted situation**

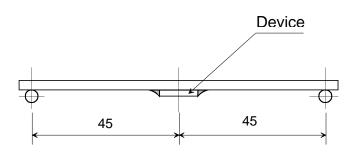

Unit:mm

Test method

Unit:mm

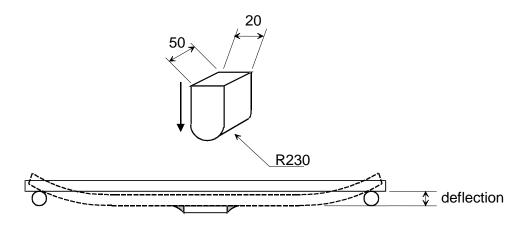




## 11. Tape and Reel Packing


1) Dimensions of Tape (Plastic tape)

Unit: mm

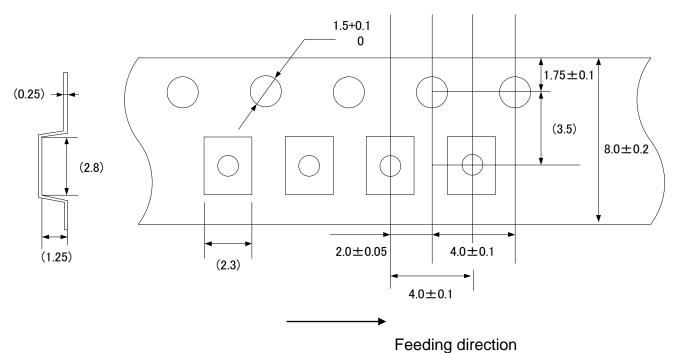


2) Dimensions of Reel


Unit: mm

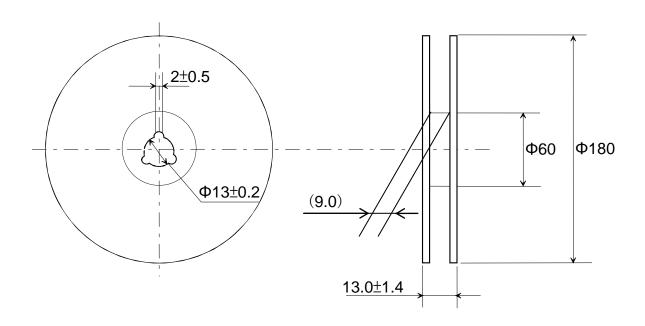




## 3) Taping Diagrams

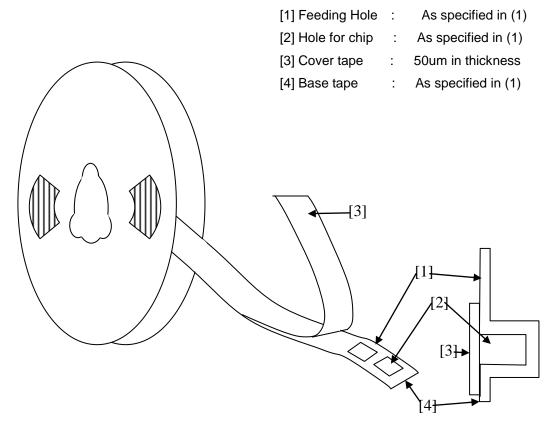

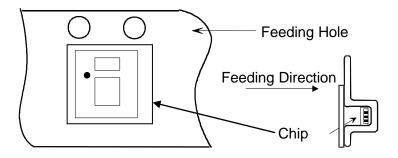



### 4) Leader and Tail tape

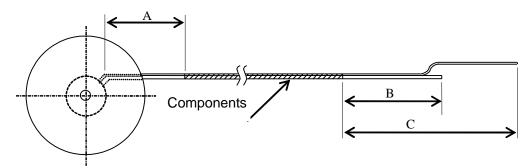


Symbol	Items	Ratings(mm)
Α	No components at trailer	min 160
В	No components at leader	min 100
С	Whole leader	min 400

- 5) The tape for chips are wound clockwise and the feeding holes are to the right side as the tape is pulled toward the user.
- 6) Packaging unit: 3,000 pcs./ reel
- 7) Material : Base Tape ... Plastic

Reel ... Plastic

Antistatic coating for both base tape and reel

8) Peeling of force

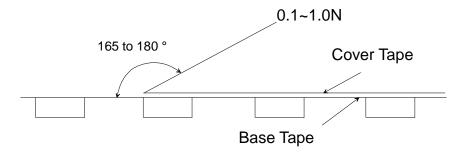



### **NOTICE**

### 1. Storage Conditions:

To avoid damaging the solderability of the external electrodes, be sure to observe the following points.

- Store products where the ambient temperature is 15 to 35 °C and humidity 45 to 75% RH. (Packing materials, In particular, may be deformed at the temperature over 40 °C.).
- Store products in non corrosive gas (Cl<sub>2</sub>, NH<sub>3</sub>,SO<sub>2</sub>, No<sub>x</sub>, etc.).
- Stored products should be used within 6 months of receipt. Solderability should be verified if this period is exceeded

This product is applicable to MSL1 (Based on IPC/JEDEC J-STD-020)

### 2. Handling Conditions:

Be careful in handling or transporting the product. Excessive stress or mechanical shock may damage the product because of the nature of ceramics structure.

Do not touch the product, especially the terminals, with bare hands. Doing so may result in poor solderability.

## 3. Standard PCB Design (Land Pattern and Dimensions):

All the ground terminals should be connected to ground patterns. Furthermore, the ground pattern should be provided between IN and OUT terminals. Please refer to the specifications for the standard land dimensions.

The recommended land pattern and dimensions are shown for a reference purpose only. Electrical, mechanical and thermal characteristics of the product shall depend on the pattern design and material / thickness of the PCB. Therefore, be sure to check the product performance in the actual set. When using underfill materials, be sure to check the mechanical characteristics in the actual set.




## 4. Soldering Conditions:

Soldering is allowed up through 2 times.

Carefully perform preheating :  $\triangle T$  less than 130 °C.

When products are immersed in solvent after mounting, pay special attention to maintain the temperature difference within 100 °C. Soldering must be carried out by the above mentioned conditions to prevent products from damage. Contact Murata before use if concerning other soldering conditions.

### Reflow soldering standard conditions (example)

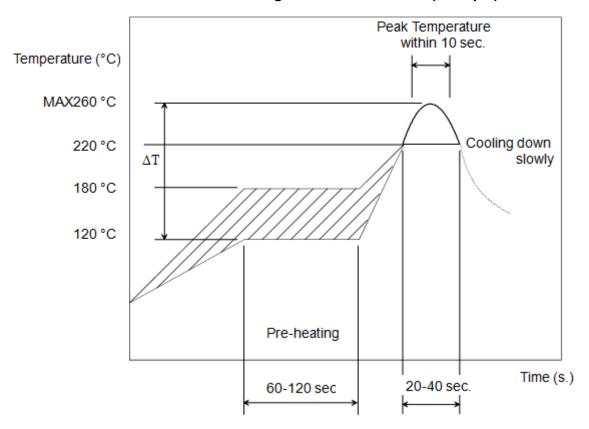

Use rosin type flux or weakly active flux with a chlorine content of 0.2 wt % or less.



## 5. Cleaning Conditions:

The product is not designed to be cleaned after soldering.

### 6. Operational Environment Conditions:

Products are designed to work for electronic products under normal environmental conditions (ambient temperature, humidity and pressure). Therefore, products have no problems to be used under the similar conditions to the above-mentioned. However, if products are used under the following circumstances, it may damage products and leakage of electricity and abnormal temperature may occur.

- In an atmosphere containing corrosive gas (Cl<sub>2</sub>, NH<sub>3</sub>, SO<sub>x</sub>, NO<sub>x</sub> etc.).
- In an atmosphere containing combustible and volatile gases.
- In a dusty environment.
- Direct sunlight
- Water splashing place.
- Humid place where water condenses.
- In a freezing environment.

If there are possibilities for products to be used under the preceding clause, consult with Murata before actual use.

If static electricity is added to this product, degradation and destruction may be produced.

Please use it after consideration enough so that neither static electricity nor excess voltage is added at the time of an assembly and measurement.

If product malfunctions may result in serious damage, including that to human life, sufficient fail-safe measures must be taken, including the following:

- (1) Installation of protection circuits or other protective device to improve system safety
- (2) Installation of redundant circuits in the case of single-circuit failure

### 7. Input Power Capacity:

Products shall be used in the input power capacity as specified in this specifications.

Inform Murata beforehand, in case that the components are used beyond such input power capacity range.



### 8. Limitation of Applications:

The products are designed and produced for application in ordinary electronic equipment (AV equipment, OA equipment, telecommunication, etc). If the products are to be used in devices requiring extremely high reliability following the application listed below, you should consult with the Murata staff in advance.

- Aircraft equipment.
- Aerospace equipment
- Undersea equipment.
- Power plant control equipment.
- Medical equipment.
- Transportation equipment (vehicles, trains, ships, etc.).
- Automobile equipment which includes the genuine brand of car manufacture, car factory-installed option and dealer-installed option.
- Traffic signal equipment.
- Disaster prevention / crime prevention equipment.
- Data-procession equipment.
- Application which malfunction or operational error may endanger human life and property of assets.
- Application which related to occurrence the serious damage
- Application of similar complexity and/ or reliability requirements to the applications listed in the above.



#### Note:

Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.

Product specifications are subject to change or our products in it may be discontinued without advance notice.

This catalog is for reference only and not an official product specification document, therefore, please review and approve our official product specification before ordering this product.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Murata:

LXDC2HL12A-050 LXDC2HL15A-051 LXDC2HL18A-052 LXDC2HL1DA-087 LXDC2HL30A-054 LXDC2HL33A-055 LXDC2HL10A-080 LXDC2HL25A-053 LXDC2HL13A-082 LXDC2HL28A-243 LXDC2HL23A-323 LXDC2HL11A-314 LXDC2HL1CA-322