


Datasheet

2.54mm Pitch DIL Vertical PC Tail Socket Assembly

RS Stock number 488-1730

Dimensions - mm

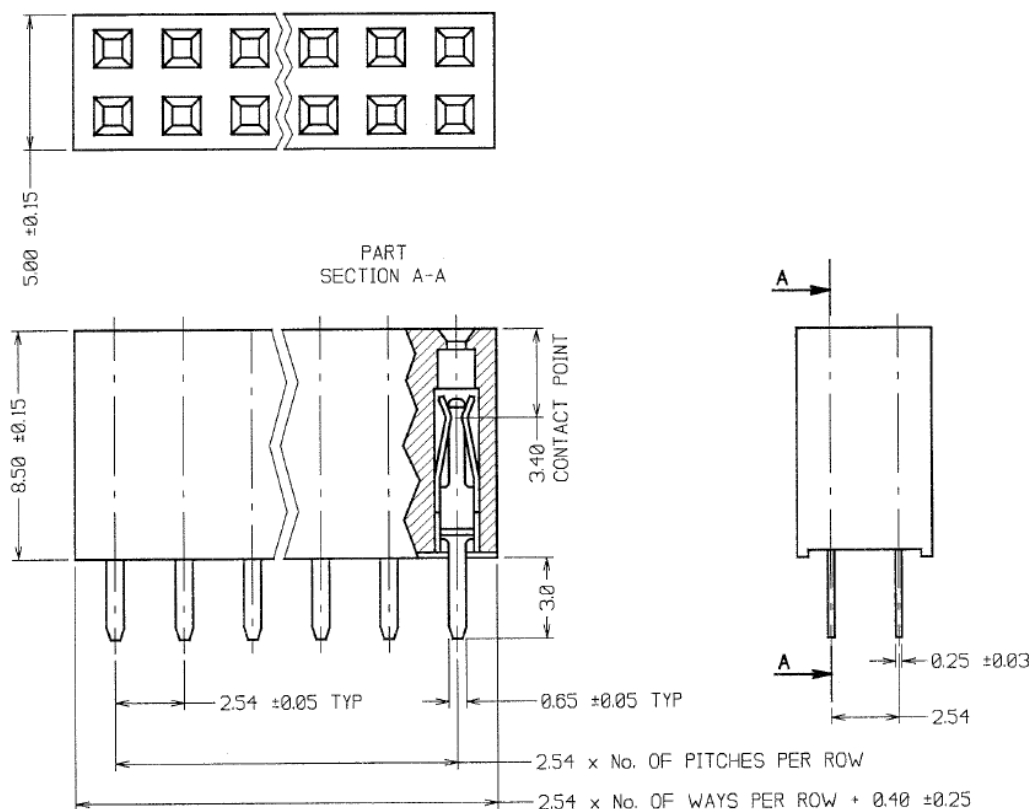

Specifications:

Moulding:	Nylon 6T UL94V-0, black
Contacts:	Phosphor bronze
Finish:	42 – Gold on contact area, 100% tin on tails 46 – 100% tin
Current Rating:	3A
Voltage Proof:	500V AC/DC
Contact Resistance:	20 milliohms max.
Insulation Resistance:	5,000 megohms min.
Temperature Range:	-40°C to 105°C
Insertion Force:	5N max.
Withdrawal Force:	0.2N min.
Durability:	50 operations