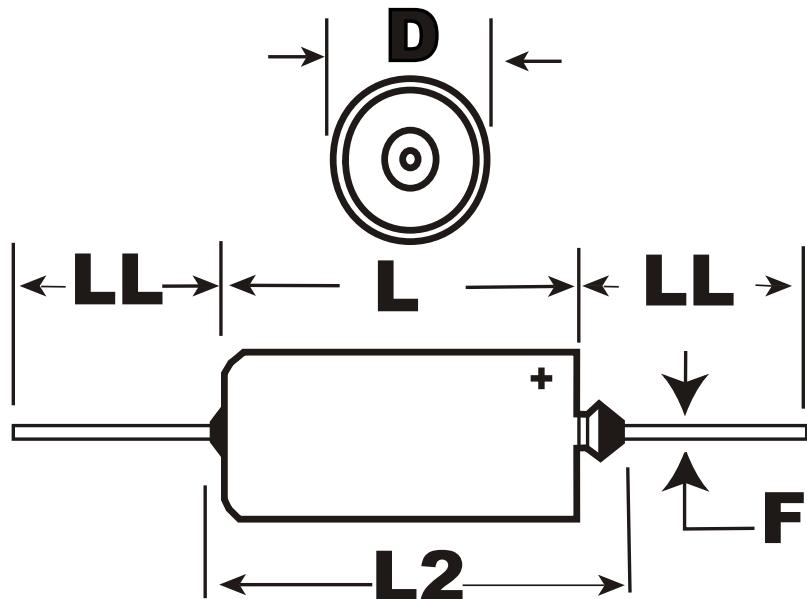


Capacitor, tantalum, 120 uF, +/-10% Tol, 15V@85C


**Dimensions (mm)**

| ID | Dimension | Tolerance |
|----|-----------|-----------|
| D  | 8.92      | +/-0.25   |
| L1 | 19.96     | +/-0.79   |
| L2 | 23.42     | +0        |
| F  | 0.64      | +/-0.05   |
| LL | 38.1      | +/-6.35   |

**Specifications**

|                      |                               |
|----------------------|-------------------------------|
| Manufacturer:        | KEMET                         |
| Value:               | 120 uF                        |
| Voltage DC @ 85C:    | 15V                           |
| Voltage DC @ 125C:   | 10V                           |
| Tolerance:           | +/-10%                        |
| Application:         | Military ER/General Purpose   |
| Body Type:           | Axial Hermetic ('cs13-style') |
| Temperature Range:   | -55/+125C                     |
| ESR:                 | 800 mOhm                      |
| ESR Frequency @ 25C: | 100kHz                        |
| Leakage Current:     | 6 uA                          |
| Dissipation Factor:  | 6%                            |
| Package Kind:        | Bulk                          |
| Package Type:        | Tray                          |

**Notes:**

- Dimensions include insulating sleeve (standard)
- D