


M39014/1-1230

aka M39014/1-1230 CKR05BX391KM C052T391K2X5CM

onlinecomponents.com
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

The Capacitance Company
KEMET
CHARGED®

Capacitor, ceramic, 390 pF, +/-10% Tol, 200V, BX, Lead Spacing=0.2"

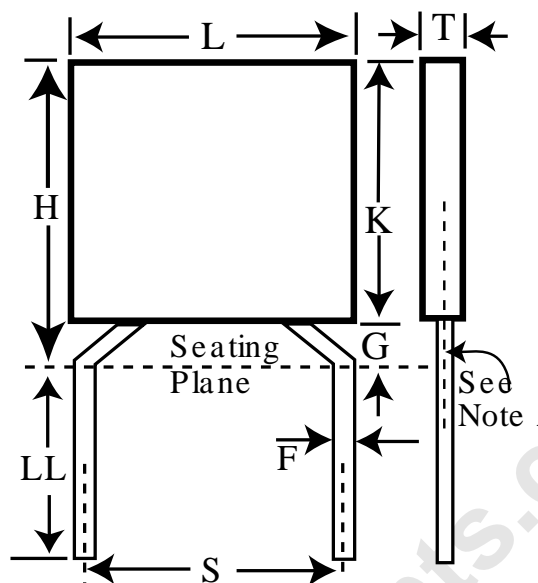

Dimensions (in)

Specifications

ID	Dimension	Tolerance	Manufacturer:	AVX
W	0.09	+/-0.01	Capacitance:	390 pF
H	0.19	+0.01/-0.055	Lead Spacing:	0.2"
L	0.19	+/-0.01	Voltage:	200V
S	0.2	+/-0.03	Temperature Coefficient:	BX
LL	1.25	min	Tolerance:	+/-10%
F	0.025	+0.004/-0.002	Body Type:	Radial Molded
K	0.2	nom	Lead Type:	Standard Leads
G	0.045	max	Lead Form:	Hockey Stick
			Package Kind:	Bulk
			Package Type:	Bag
			Package Quantity:	100

Notes:

-Note A: Center line of the leads will be within 0.03 in [0.76 mm] of the center line of the body.

-Lead length shown is for parts supplied in bulk. See packaging specifications for lead lengths when not provided in bulk