

**Madison Co.**

27 Business Park Dr.  
Branford, CT 06405 US

Phone: 203-488-4477

Fax: 203-481-5036

Toll-free: 800-466-5383

Email: info@madisonco.com

Website: http://www.madisonco.com

**Item # M4602, Stainless Steel M Series Multi-Point Switches**

**QUOTE**

**Stainless Steel M Series Multi-Point Switches**

The M4602-XXXX is a multi-point switch made with a 316 stainless steel stem and Buna-N floats.


**IMPORTANT:** The number of float points and their locations are custom selected through the use of our PRODUCT CONFIGURATOR. You can also select an appropriate mounting and switch operation, along with a few other basic selections. Upon submittal of your custom part in the Product Configurator, a quote will be generated for you.

Use "M4602" as your base part number when prompted by the Product Configurator.

**Configure your Switch on-line and receive a quote instantly!**

**"Click here" to get to our Product Configurator program**

**Note:** SPST = Single Pole, Single Throw; SPDT = Single Pole, Double Throw

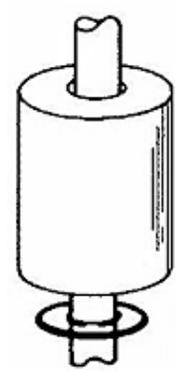

**SPECIFICATIONS**

Stem Material	316 Stainless Steel
Float Material	Buna-N
Max. Temperature	105 °C

Mounting Options	1" BSPP Stainless Steel 1" BSPT Stainless Steel 1" NPT Stainless Steel 1/2" BSPP Stainless Steel 1/2" BSPT Stainless Steel 1/2" NPT Stainless Steel 1/2"-13 Bulkhead Fitting Stainless Steel 1-1/2" BSPP Pipe Plug Stainless Steel 1-1/2" BSPT Pipe Plug Stainless Steel 1-1/2" Pipe Plug Stainless Steel 1-1/4" Pipe Plug Stainless Steel 2" BSPP Pipe Plug Stainless Steel 2" BSPT Pipe Plug Stainless Steel 2" Flange Sub Assembly Stainless Steel 2" Pipe Plug Stainless Steel 3" Flange Sub Assembly Stainless Steel 3/4" BSPP Stainless Steel 3/4" BSPT Stainless Steel 3/4" NPT Stainless Steel 3/4"-10 Bulkhead Fitting Stainless Steel 3/8" BSPP Stainless Steel 3/8" BSPT Stainless Steel 3/8" NPT Stainless Steel
Nominal Current Rating(s)	100 VA SPST Switch 25 VA SPDT Switch 60 VA SPST Switch
Float SG	0.45
Max. Pressure	150 psig
Dwg. No.	8
Lead Wires	22 ga. Teflon 24"
Approvals	CE CSA UL
Lead Time	4 Days